
UTS SALES AND REPAIRS


A SAFER WAY TO REACH NEW HEIGHTS


Single Width Tower	Working Height	Platform Height
2.5m Long x 0.85m Wide	4.2m	2.2m

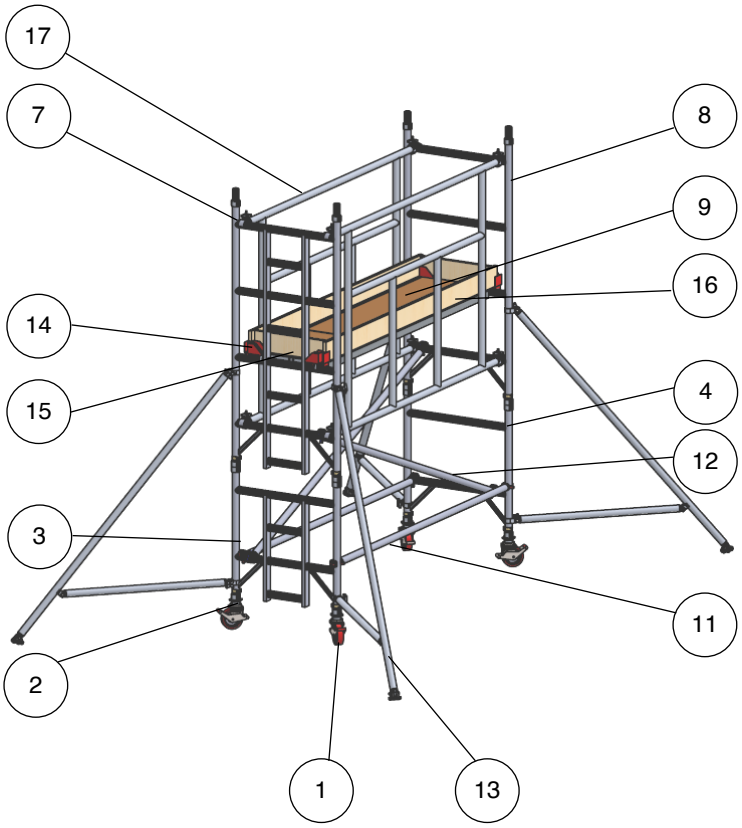

Tower Components

Item	Description	Quantity
1	150mm Locking Caster	4
2	Adjustable Leg 500mm	4
3	1m Ladder Frame	1
4	1m Span Frame	1
5	1.5m Ladder Frame	0
6	1.5m Span Frame	0
7	2m Ladder Frame	1
8	2m Span Frame	1
9	2.5m Trapdoor Platform	1
10	2.5m Fixed Platform	0
11	2.5m Horizontal Brace	2
12	2.7m Diagonal Brace	2
13	S1 Stabiliser	4
14	Toeboard Clips	4
15	Single End	2
16	2.5m Side	2
17	2.5m AGR	2



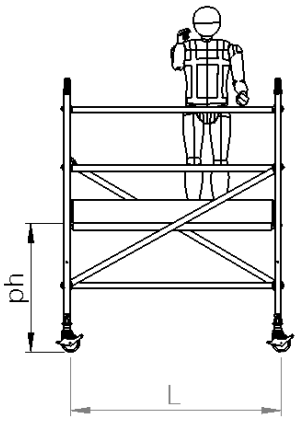

Technical information:

Base Dimensions:	(L)2.5m X (W)0.85m
Maximum Platform Height (ph):	2.2m
Maximum Working Height (wh):	4.2m
Maximum Working Load Per Platform:	275kg
Maximum Working Load Per Tower: (including tower weight)	950kg
Weight:	121.4kg

*Folding single piece Aluminum toeboard available as an upgrade

01227 860085
Mon-Fri, 8am until 5pm

For More Information:
info@towersandpodiums.co.uk
We reply within 1 hour
Mon-Fri, 8am until 5pm

T&RGETMARK CERTIFIED
BS EN 1004-1:2020
BS EN 1004-2:2021
TM1008
testandresearch.org


MADE IN BRITAIN

FORS
FLEET OPERATOR RECOGNITION SCHEME

UTS SALES AND REPAIRS


A SAFER WAY TO REACH NEW HEIGHTS


Single Width Tower	Working Height	Platform Height
2.5m Long x 0.85m Wide	4.7m	2.7m

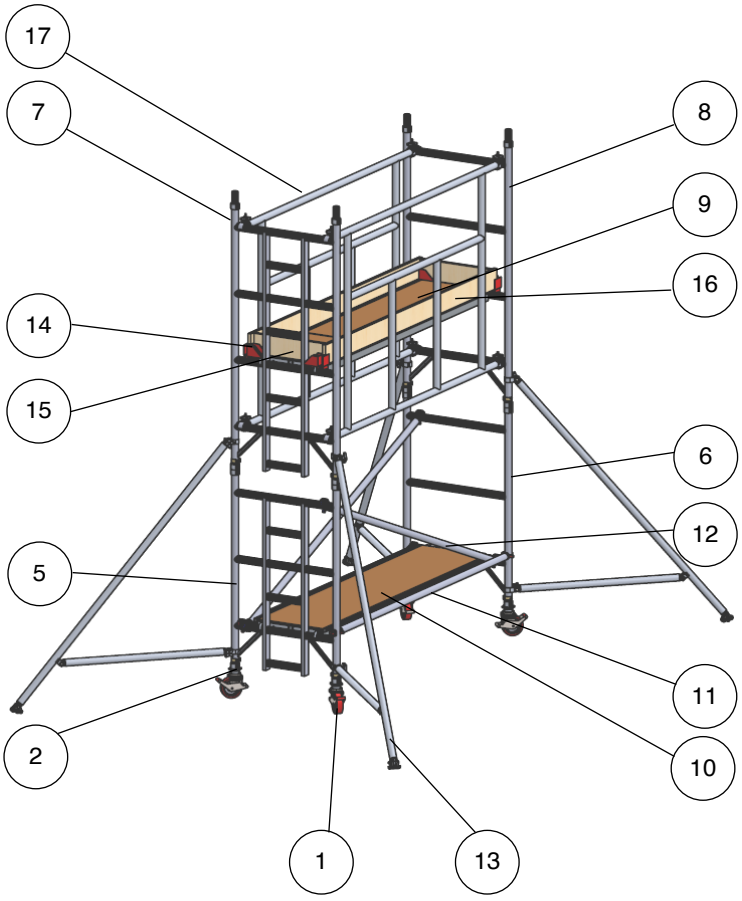

Tower Components

Item	Description	Quantity
1	150mm Locking Caster	4
2	Adjustable Leg 500mm	4
3	1m Ladder Frame	0
4	1m Span Frame	0
5	1.5m Ladder Frame	1
6	1.5m Span Frame	1
7	2m Ladder Frame	1
8	2m Span Frame	1
9	2.5m Trapdoor Platform	1
10	2.5m Fixed Platform	1
11	2.5m Horizontal Brace	2
12	2.7m Diagonal Brace	2
13	S1 Stabiliser	4
14	Toeboard Clips	4
15	Single End	2
16	2.5m Side	2
17	2.5m AGR	2



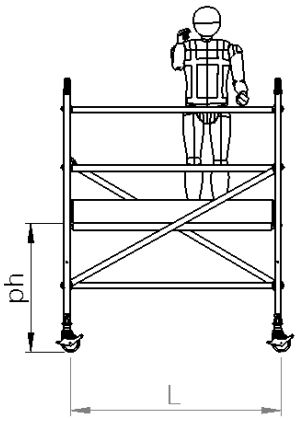

Technical information:

Base Dimensions:	(L)2.5m X (W)0.85m
Maximum Platform Height (ph):	2.7m
Maximum Working Height (wh):	4.7m
Maximum Working Load Per Platform:	275kg
Maximum Working Load Per Tower: (including tower weight)	950kg
Weight:	143.5kg

*Folding single piece Aluminum toeboard available as an upgrade

01227 860085
Mon-Fri, 8am until 5pm

For More Information:
info@towersandpodiums.co.uk
We reply within 1 hour
Mon-Fri, 8am until 5pm


T&RGETMARK CERTIFIED
BS EN 1004-1:2020
BS EN 1004-2:2021
TM1008
testandresearch.org

MADE IN BRITAIN
FORS FLEET OPERATOR RECOGNITION SCHEME

UTS SALES AND REPAIRS


A SAFER WAY TO REACH NEW HEIGHTS


Single Width Tower	Working Height	Platform Height
2.5m Long x 0.85m Wide	5.7m	3.7m

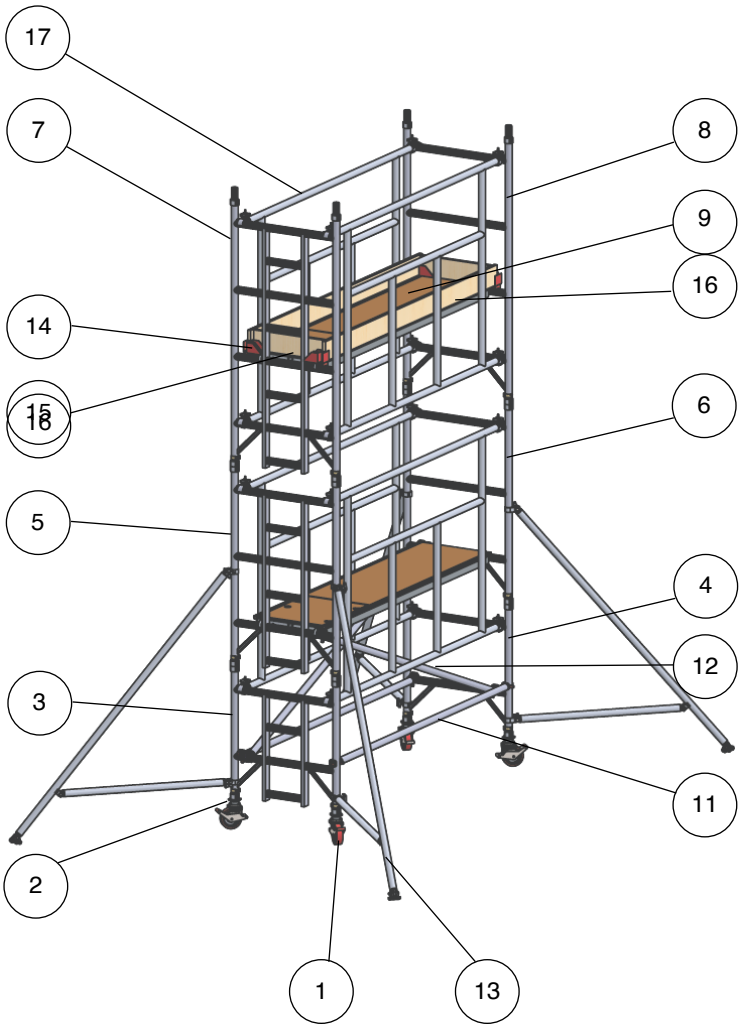

Tower Components

Item	Description	Quantity
1	150mm Locking Caster	4
2	Adjustable Leg 500mm	4
3	1m Ladder Frame	1
4	1m Span Frame	1
5	1.5m Ladder Frame	1
6	1.5m Span Frame	1
7	2m Ladder Frame	1
8	2m Span Frame	1
9	2.5m Trapdoor Platform	2
10	2.5m Fixed Platform	0
11	2.5m Horizontal Brace	2
12	2.7m Diagonal Brace	2
13	S1 Stabiliser	4
14	Toeboard Clips	4
15	Single End	2
16	2.5m Side	2
17	2.5m AGR	4



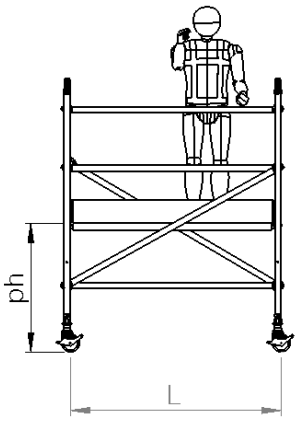

Technical information:

Base Dimensions:	(L)2.5m X (W)0.85m
Maximum Platform Height (ph):	3.7m
Maximum Working Height (wh):	5.7m
Maximum Working Load Per Platform:	275kg
Maximum Working Load Per Tower: (including tower weight)	950kg
Weight:	175.2kg

*Folding single piece Aluminum toeboard available as an upgrade

01227 860085
Mon-Fri, 8am until 5pm

For More Information:
info@towersandpodiums.co.uk
We reply within 1 hour
Mon-Fri, 8am until 5pm


T&RGETMARK CERTIFIED
BS EN 1004-1:2020
BS EN 1004-2:2021
TM1008
testandresearch.org

MADE IN BRITAIN
FORS FLEET OPERATOR RECOGNITION SCHEME

UTS SALES AND REPAIRS


A SAFER WAY TO REACH NEW HEIGHTS


Single Width Tower	Working Height	Platform Height
2.5m Long x 0.85m Wide	6.2m	4.2m

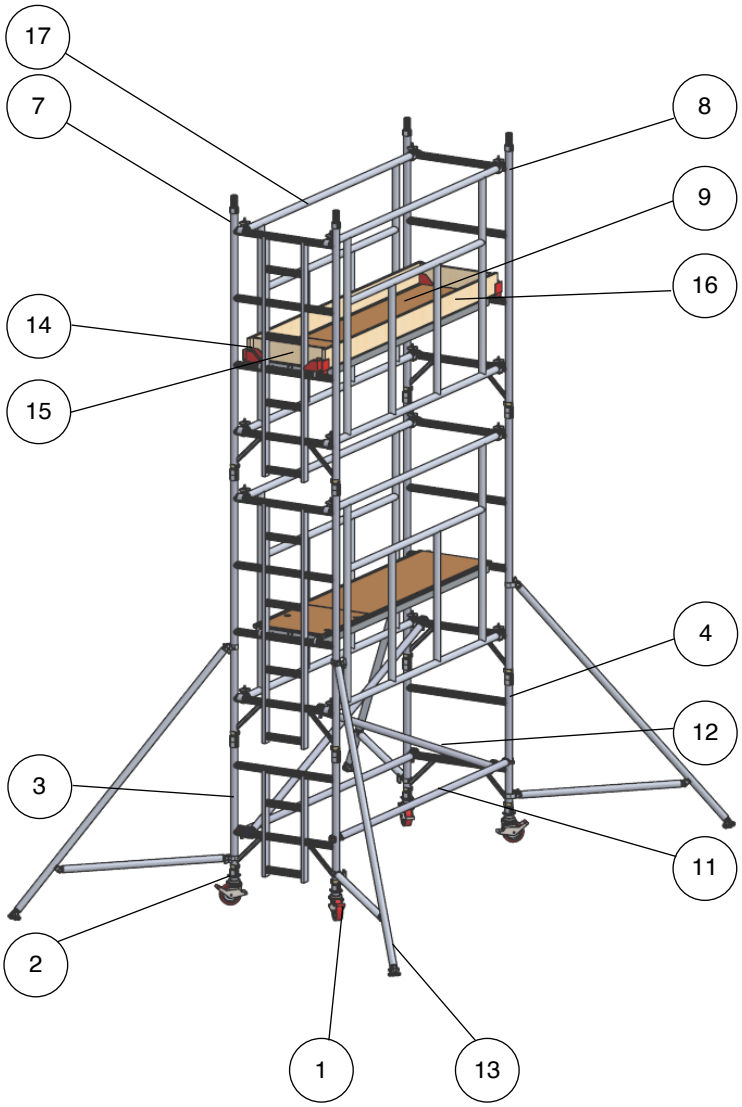

Tower Components

Item	Description	Quantity
1	150mm Locking Caster	4
2	Adjustable Leg 500mm	4
3	1m Ladder Frame	1
4	1m Span Frame	1
5	1.5m Ladder Frame	0
6	1.5m Span Frame	0
7	2m Ladder Frame	2
8	2m Span Frame	2
9	2.5m Trapdoor Platform	2
10	2.5m Fixed Platform	0
11	2.5m Horizontal Brace	2
12	2.7m Diagonal Brace	2
13	S1 Stabiliser	4
14	Toeboard Clips	4
15	Single End	2
16	2.5m Side	2
17	2.5m AGR	4



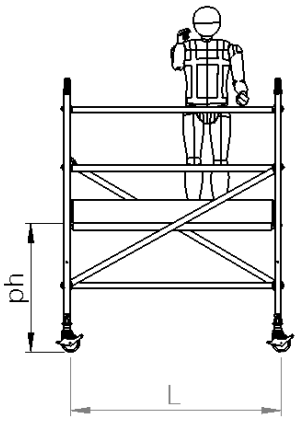

Technical information:

Base Dimensions:	(L)2.5m X (W)0.85m
Maximum Platform Height (ph):	4.2m
Maximum Working Height (wh):	6.2m
Maximum Working Load Per Platform:	275kg
Maximum Working Load Per Tower: (including tower weight)	950kg
Weight:	179kg

*Folding single piece Aluminum toeboard available as an upgrade

01227 860085
Mon-Fri, 8am until 5pm

For More Information:
info@towersandpodiums.co.uk
We reply within 1 hour
Mon-Fri, 8am until 5pm

T&RGETMARK CERTIFIED
BS EN 1004-1:2020
BS EN 1004-2:2021
TM1008
testandresearch.org


MADE IN BRITAIN

FORS FLEET OPERATOR RECOGNITION SCHEME

UTS SALES AND REPAIRS


A SAFER WAY TO REACH NEW HEIGHTS


Single Width Tower	Working Height	Platform Height
2.5m Long x 0.85m Wide	6.7m	4.7m

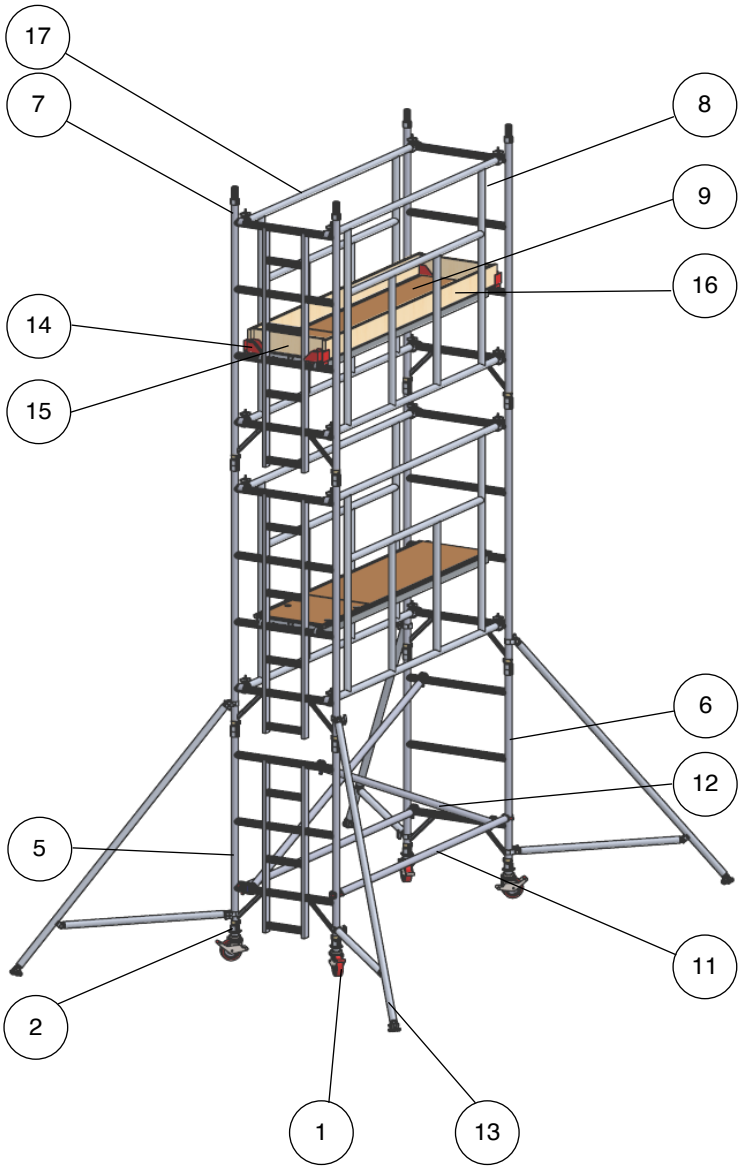

Tower Components

Item	Description	Quantity
1	150mm Locking Caster	4
2	Adjustable Leg 500mm	4
3	1m Ladder Frame	0
4	1m Span Frame	0
5	1.5m Ladder Frame	1
6	1.5m Span Frame	1
7	2m Ladder Frame	2
8	2m Span Frame	2
9	2.5m Trapdoor Platform	2
10	2.5m Fixed Platform	0
11	2.5m Horizontal Brace	2
12	2.7m Diagonal Brace	2
13	S1 Stabiliser	4
14	Toeboard Clips	4
15	Single End	2
16	2.5m Side	2
17	2.5m AGR	4

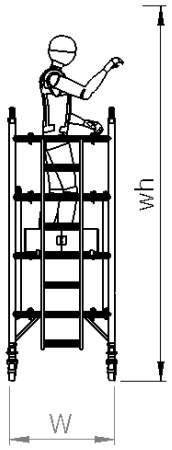

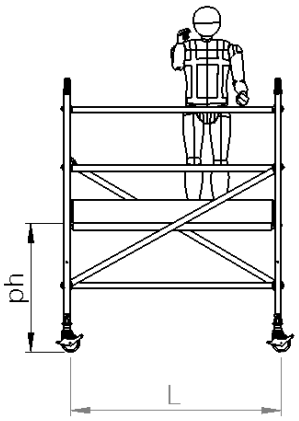

Technical information:

Base Dimensions:	(L)2.5m X (W)0.85m
Maximum Platform Height (ph):	4.7m
Maximum Working Height (wh):	6.7m
Maximum Working Load Per Platform:	275kg
Maximum Working Load Per Tower: (including tower weight)	950kg
Weight:	185.1kg

*Folding single piece Aluminum toeboard available as an upgrade

01227 860085
Mon-Fri, 8am until 5pm

For More Information:
info@towersandpodiums.co.uk
We reply within 1 hour
Mon-Fri, 8am until 5pm


T&RGETMARK CERTIFIED
BS EN 1004-1:2020
BS EN 1004-2:2021
TM1008
testandresearch.org

MADE IN BRITAIN
FORS FLEET OPERATOR RECOGNITION SCHEME

UTS SALES AND REPAIRS


A SAFER WAY TO REACH NEW HEIGHTS


Single Width Tower	Working Height	Platform Height
2.5m Long x 0.85m Wide	7.7m	5.7m

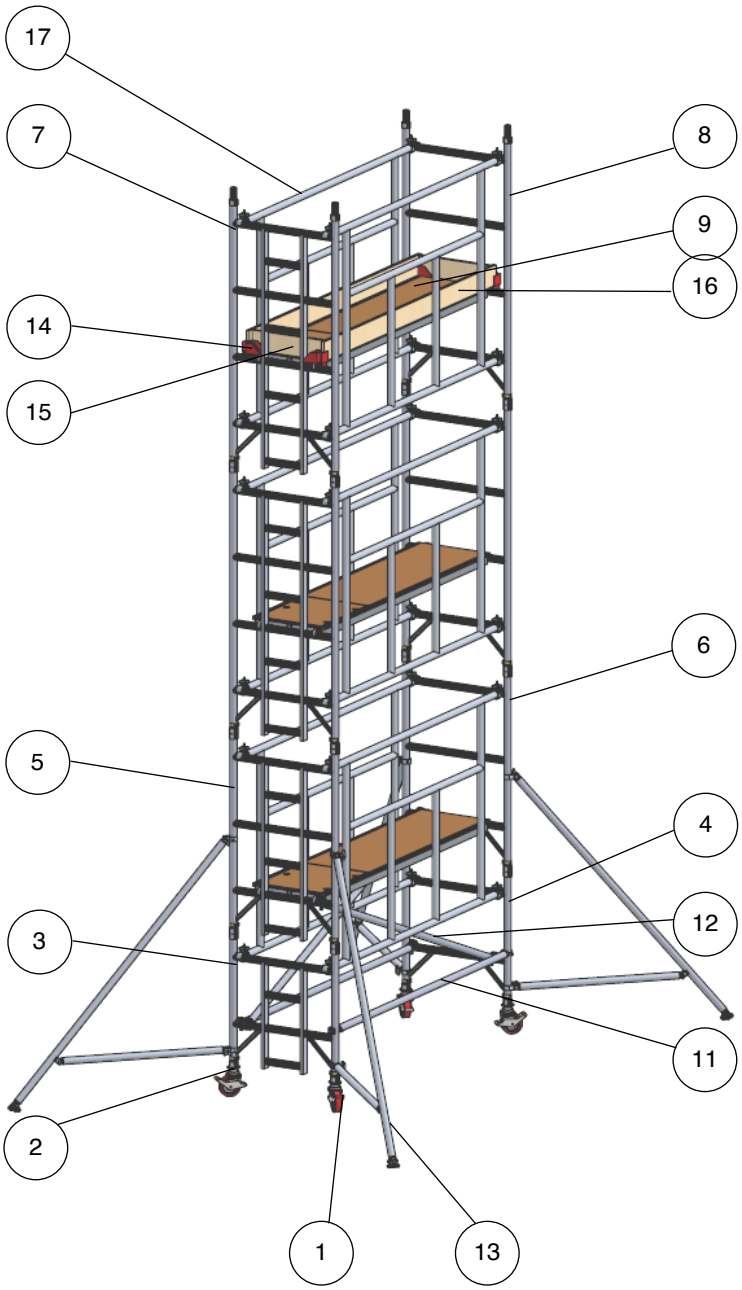

Tower Components

Item	Description	Quantity
1	150mm Locking Caster	4
2	Adjustable Leg 500mm	4
3	1m Ladder Frame	1
4	1m Span Frame	1
5	1.5m Ladder Frame	1
6	1.5m Span Frame	1
7	2m Ladder Frame	2
8	2m Span Frame	2
9	2.5m Trapdoor Platform	3
10	2.5m Fixed Platform	0
11	2.5m Horizontal Brace	2
12	2.7m Diagonal Brace	2
13	S1 Stabiliser	4
14	Toeboard Clips	4
15	Single End	2
16	2.5m Side	2
17	2.5m AGR	6

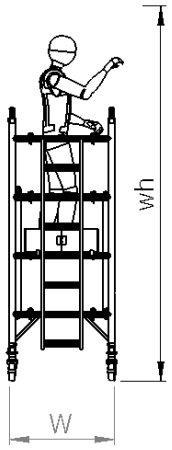

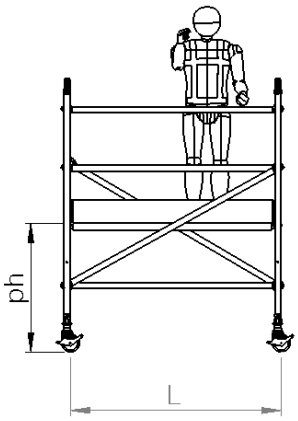

Technical information:

Base Dimensions:	(L)2.5m X (W)0.85m
Maximum Platform Height (ph):	5.7m
Maximum Working Height (wh):	7.7m
Maximum Working Load Per Platform:	275kg
Maximum Working Load Per Tower: (including tower weight)	950kg
Weight:	240kg

*Folding single piece Aluminum toeboard available as an upgrade

01227 860085
Mon-Fri, 8am until 5pm

For More Information:
info@towersandpodiums.co.uk
We reply within 1 hour
Mon-Fri, 8am until 5pm

T&RGETMARK CERTIFIED
BS EN 1004-1:2020
BS EN 1004-2:2021
TM1008
testandresearch.org


MADE IN BRITAIN

FORS
FLEET OPERATOR RECOGNITION SCHEME

UTS SALES AND REPAIRS


A SAFER WAY TO REACH NEW HEIGHTS


Single Width Tower	Working Height	Platform Height
2.5m Long x 0.85m Wide	8.2m	6.2m

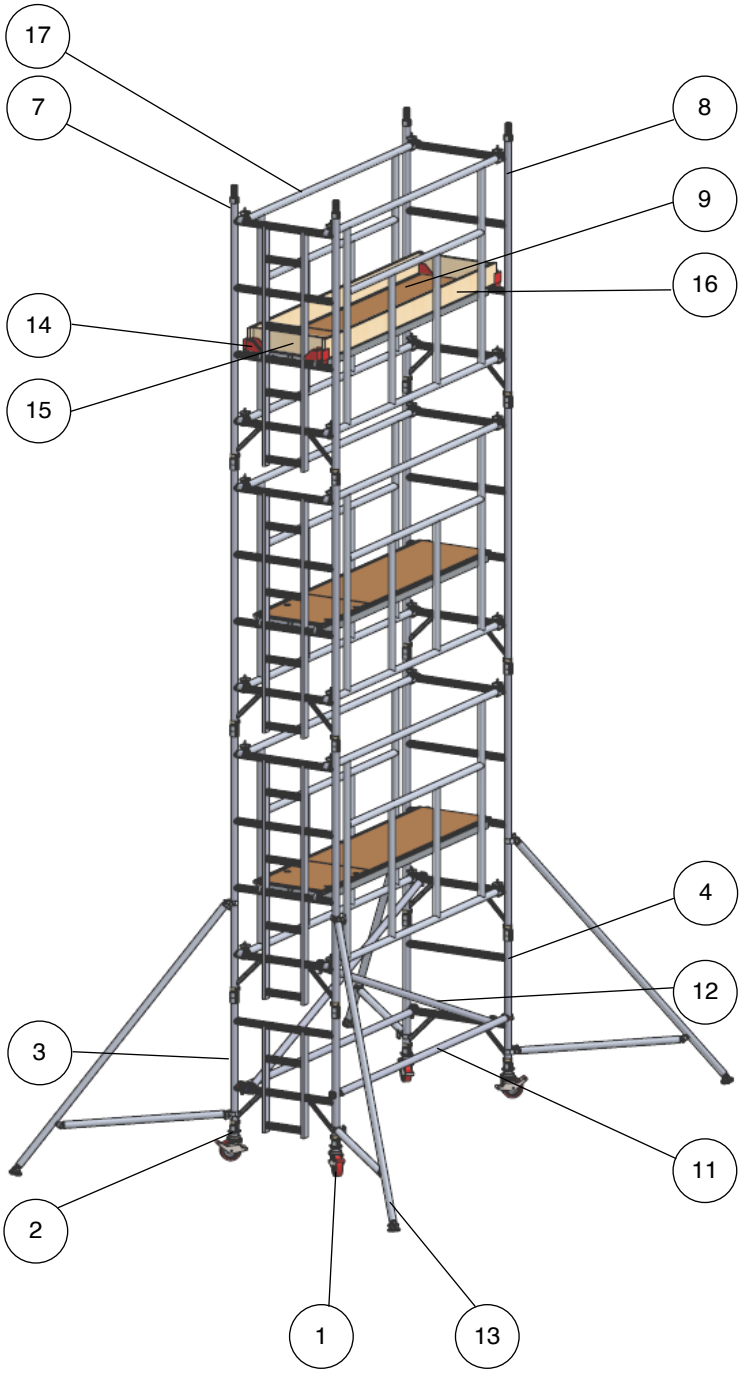

Tower Components

Item	Description	Quantity
1	150mm Locking Caster	4
2	Adjustable Leg 500mm	4
3	1m Ladder Frame	1
4	1m Span Frame	1
5	1.5m Ladder Frame	0
6	1.5m Span Frame	0
7	2m Ladder Frame	3
8	2m Span Frame	3
9	2.5m Trapdoor Platform	3
10	2.5m Fixed Platform	0
11	2.5m Horizontal Brace	2
12	2.7m Diagonal Brace	2
13	S1 Stabiliser	4
14	Toeboard Clips	4
15	Single End	2
16	2.5m Side	2
17	2.5m AGR	6

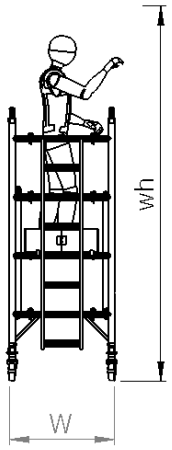

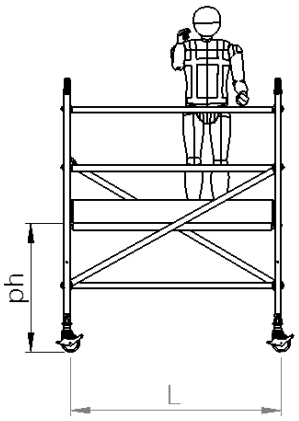

Technical information:

Base Dimensions:	(L)2.5m X (W)0.85m
Maximum Platform Height (ph):	6.2m
Maximum Working Height (wh):	8.2m
Maximum Working Load Per Platform:	275kg
Maximum Working Load Per Tower: (including tower weight)	950kg
Weight:	243.8kg

*Folding single piece Aluminum toeboard available as an upgrade

01227 860085
Mon-Fri, 8am until 5pm

For More Information:
info@towersandpodiums.co.uk
We reply within 1 hour
Mon-Fri, 8am until 5pm

T&RGETMARK CERTIFIED
BS EN 1004-1:2020
BS EN 1004-2:2021
TM1008
testandresearch.org


MADE IN BRITAIN

FORS FLEET OPERATOR RECOGNITION SCHEME

UTS SALES AND REPAIRS


A SAFER WAY TO REACH NEW HEIGHTS

Single Width Tower	Working Height	Platform Height
2.5m Long x 0.85m Wide	8.7m	6.7m

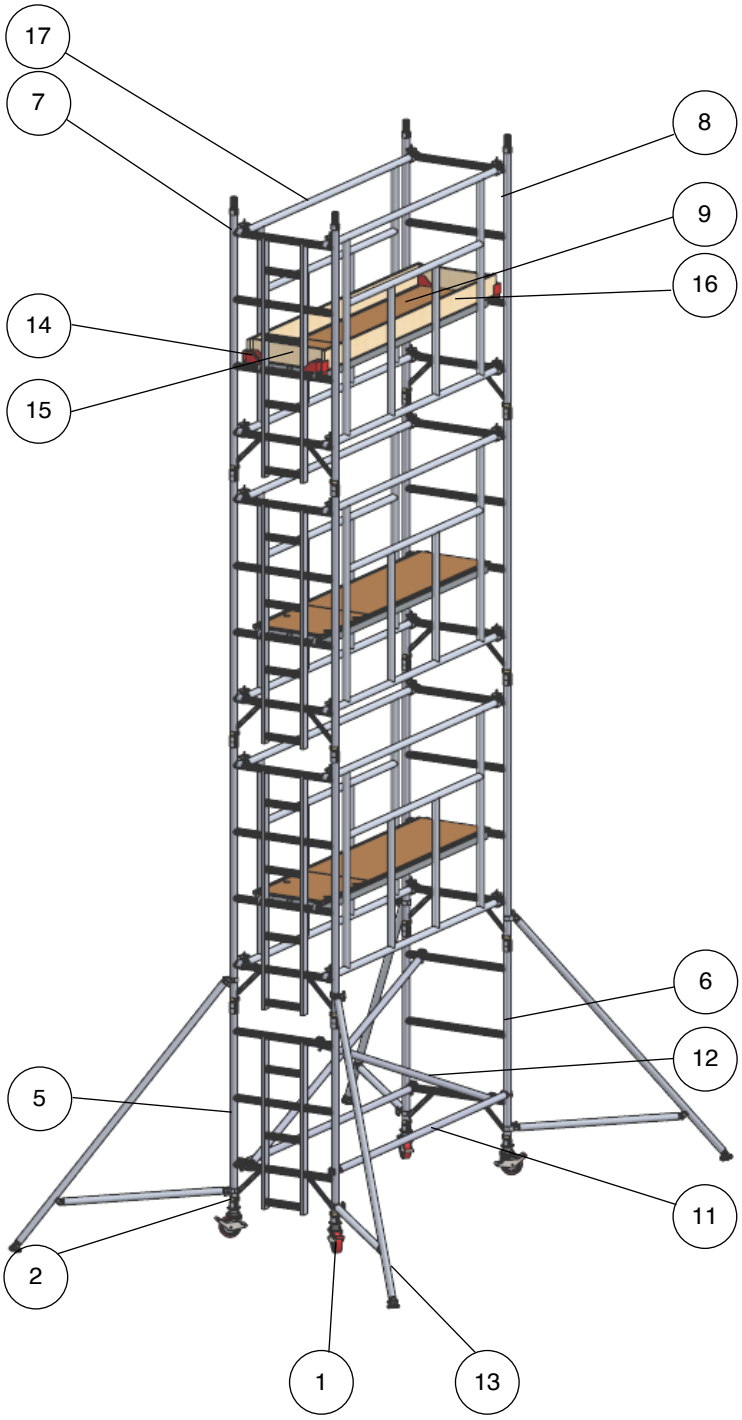

Tower Components

Item	Description	Quantity
1	150mm Locking Caster	4
2	Adjustable Leg 500mm	4
3	1m Ladder Frame	0
4	1m Span Frame	0
5	1.5m Ladder Frame	1
6	1.5m Span Frame	1
7	2m Ladder Frame	3
8	2m Span Frame	3
9	2.5m Trapdoor Platform	3
10	2.5m Fixed Platform	0
11	2.5m Horizontal Brace	2
12	2.7m Diagonal Brace	2
13	S1 Stabiliser	4
14	Toeboard Clips	4
15	Single End	2
16	2.5m Side	2
17	2.5m AGR	6

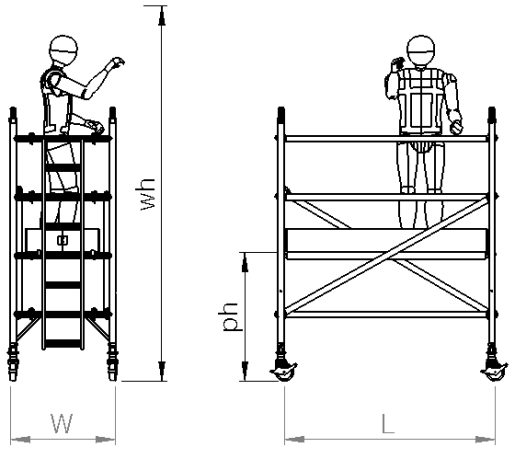

Technical information:

Base Dimensions:	(L)2.5m X (W)0.85m
Maximum Platform Height (ph):	6.7m
Maximum Working Height (wh):	8.7m
Maximum Working Load Per Platform:	275kg
Maximum Working Load Per Tower: (including tower weight)	950kg
Weight:	249.9kg

*Folding single piece Aluminum toeboard available as an upgrade

01227 860085
Mon-Fri, 8am until 5pm

For More Information:
info@towersandpodiums.co.uk
We reply within 1 hour
Mon-Fri, 8am until 5pm


T&RGETMARK CERTIFIED
BS EN 1004-1:2020
BS EN 1004-2:2021
TM1008
testandresearch.org

MADE IN BRITAIN
FORS FLEET OPERATOR RECOGNITION SCHEME

UTS SALES AND REPAIRS


A SAFER WAY TO REACH NEW HEIGHTS

Single Width Tower	Working Height	Platform Height
2.5m Long x 0.85m Wide	9.7m	7.7m

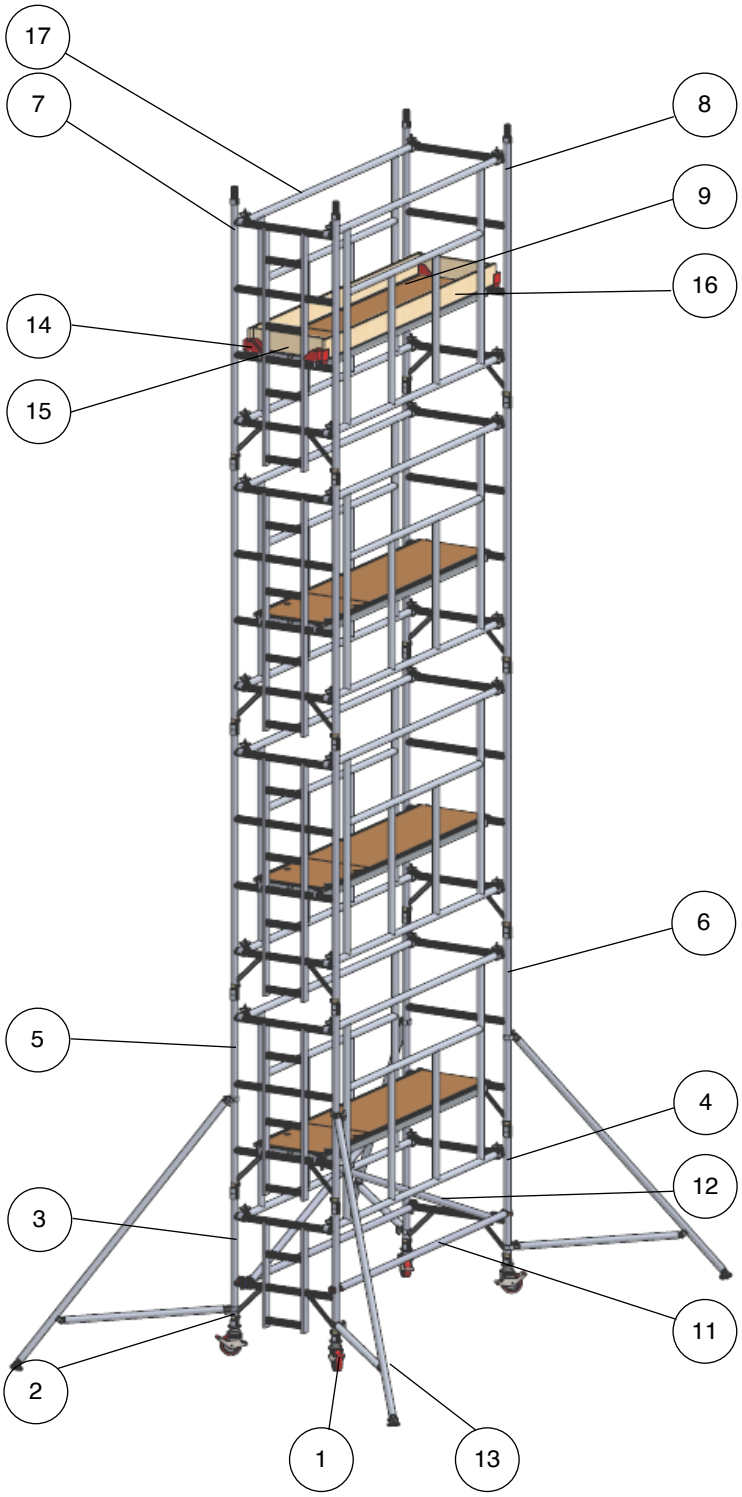

Tower Components

Item	Description	Quantity
1	150mm Locking Caster	4
2	Adjustable Leg 500mm	4
3	1m Ladder Frame	1
4	1m Span Frame	1
5	1.5m Ladder Frame	1
6	1.5m Span Frame	1
7	2m Ladder Frame	3
8	2m Span Frame	3
9	2.5m Trapdoor Platform	4
10	2.5m Fixed Platform	0
11	2.5m Horizontal Brace	2
12	2.7m Diagonal Brace	2
13	S1 Stabiliser	4
14	Toeboard Clips	4
15	Single End	2
16	2.5m Side	2
17	2.5m AGR	8

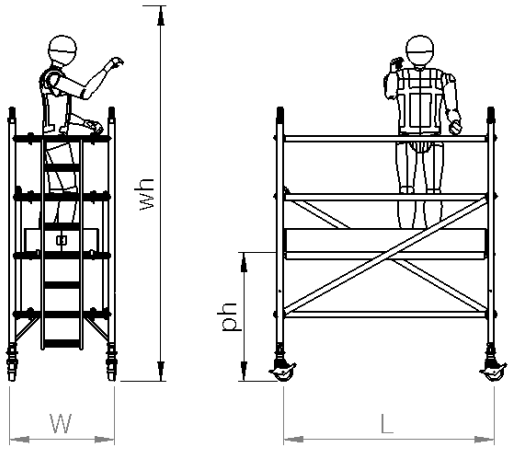

Technical information:

Base Dimensions:	(L)2.5m X (W)0.85m
Maximum Platform Height (ph):	7.7m
Maximum Working Height (wh):	9.7m
Maximum Working Load Per Platform:	275kg
Maximum Working Load Per Tower: (including tower weight)	950kg
Weight:	297.6kg

*Folding single piece Aluminum toeboard available as an upgrade

01227 860085
Mon-Fri, 8am until 5pm

For More Information:
info@towersandpodiums.co.uk
We reply within 1 hour
Mon-Fri, 8am until 5pm

T&RGETMARK CERTIFIED
BS EN 1004-1:2020
BS EN 1004-2:2021
TM1008
testandresearch.org


MADE IN BRITAIN

FORS FLEET OPERATOR RECOGNITION SCHEME

UTS SALES AND REPAIRS

A SAFER WAY TO REACH NEW HEIGHTS


Single Width Tower	Working Height	Platform Height
2.5m Long x 0.85m Wide	10.2m	8.2m

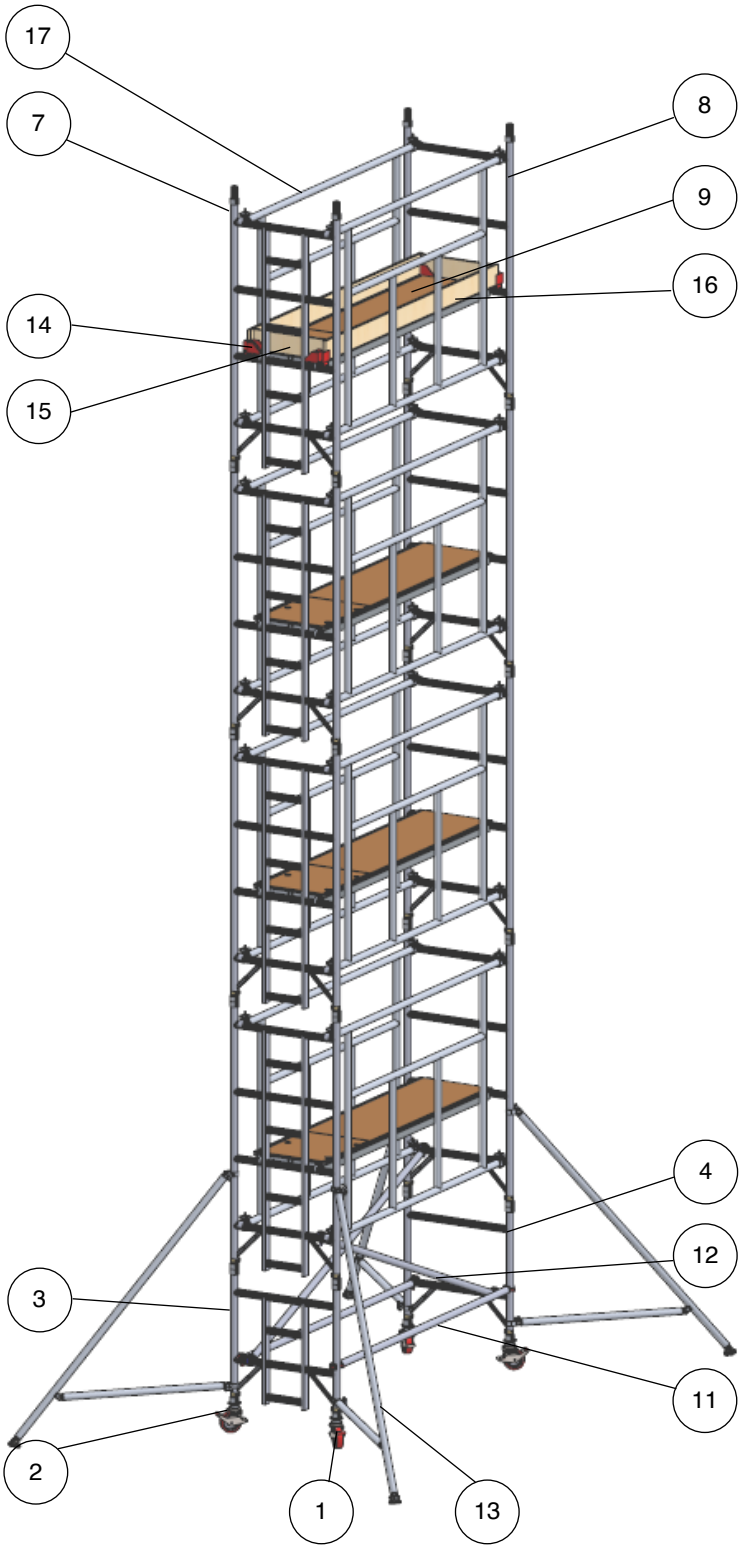

*Folding single piece Aluminum toeboard available as an upgrade

Tower Components

Item	Description	Quantity
1	150mm Locking Caster	4
2	Adjustable Leg 500mm	4
3	1m Ladder Frame	1
4	1m Span Frame	1
5	1.5m Ladder Frame	0
6	1.5m Span Frame	0
7	2m Ladder Frame	4
8	2m Span Frame	4
9	2.5m Trapdoor Platform	4
10	2.5m Fixed Platform	0
11	2.5m Horizontal Brace	2
12	2.7m Diagonal Brace	2
13	S1 Stabiliser	4
14	Toeboard Clips	4
15	Single End	2
16	2.5m Side	2
17	2.5m AGR	8

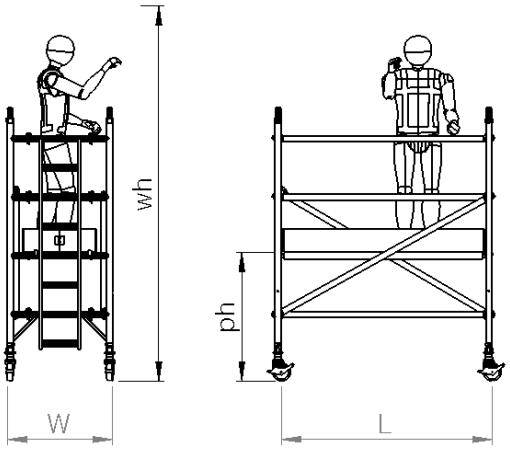

Technical information:

Base Dimensions:	(L)2.5m X (W)0.85m
Maximum Platform Height (ph):	8.2m
Maximum Working Height (wh):	10.2m
Maximum Working Load Per Platform:	275kg
Maximum Working Load Per Tower: (including tower weight)	950kg
Weight:	301.4kg

01227 860085
Mon-Fri, 8am until 5pm

For More Information:
info@towersandpodiums.co.uk
We reply within 1 hour
Mon-Fri, 8am until 5pm

T&RGETMARK CERTIFIED
BS EN 1004-1:2020
BS EN 1004-2:2021
TM1008
testandresearch.org

MADE IN BRITAIN

FORS FLEET OPERATOR RECOGNITION SCHEME