Product data sheet

Power tools for trade & industry

Rotary Hammer with SDS plus

PRO GBH 2-26



All-round performance rotary hammer for daily use in the SDS plus category

The most important data

Rated input power	830 W
Impact energy	2.7 J
Drilling dia. concrete, hammer drill bits	4 – 26 mm

Part Number 0 611 2A3 060

Technical data

Performance data

Impact rate at rated speed	0 – 4,000 bpm
Rated speed	0 – 900 rpm

Technical data

Tool holder	SDS plus
Impact energy	2.7 J
Rated input power	830 W
Weight	2.9 kg
Packaging dimensions (width x length x height)	443 x 117 x 362 mm
Voltage, electrical	110 V

Drilling range

Drilling dia. concrete, hammer drill bits	4 – 26 mm
Opt. appl. range concrete, hammer drill bits	8 – 16 mm

Noise/vibration information

Hammer drilling in concrete

Vibration emission value ah	16.5 m/s²
Uncertainty K	1.5 m/s²


Chiselling in concrete

Vibration emission value ah	12.1 m/s²
Uncertainty K	1.5 m/s²

BOSCH
Invented for life

Advantages:

- Delivers 2.7 J of impact energy for fast drilling and high chisel removal performance
- High-quality components ensure robustness, reliability, and long performance lifetime
- Optional chisel mode enables use in wide range of applications

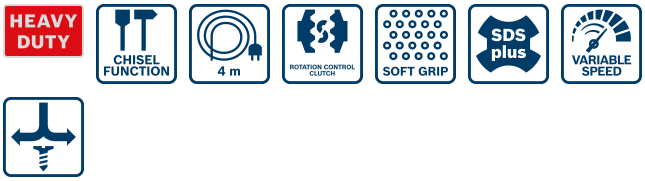

You can find more information about the deviations in the following link: https://www.bosch-professional.com/gb/en/wac/