BROUGHTON PLANT HIRE


HIRE | SALES | SERVICE
Specialists for over 40 years

Adjustable Beam Trolley

The 1 Tonne Adjustable Beam Trolley is designed for safe and easy load movement along beams with flange widths from 52–220mm. It features anti-drop bars, high-grade sealed ball-bearing wheels and can operate on curves with a minimum radius of 0.7m.

SPECIFICATIONS

- Product Weight: 10 kg
- Working Load Limit (WLL): 1 tonne
- Beam Width: 50–220 mm
- Minimum Radius Curve: 0.7 m
- Standard Compliance: BS EN 13157:2004+A1:2009

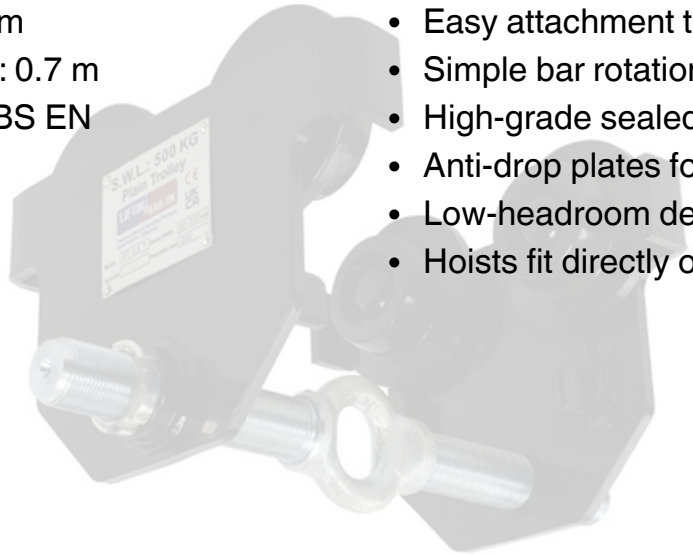

FEATURES

- Adjustable beam width for compatibility with different beams
- Easy attachment to most RSJ beams
- Simple bar rotation to adjust the width
- High-grade sealed ball-bearing wheels
- Anti-drop plates for added safety
- Low-headroom design
- Hoists fit directly onto the trolley