Bending formers and back formers

Accessories for REMS Curvo 50, REMS Curvo, REMS Curvo 22 V and REMS Sinus

Bending formers and back formers, 180°, form and pressure resistant, in high-strength, high-slide, glass-fibre reinforced polyamide or aluminum 90° (Ø 21.3 R 103, Ø 26.9 R 102, Ø 33.7 R 100, Ø 35 R 100, Ø 42 R 140, Ø 42.4 R 140, Ø 50 R 135, Ø 1" R 100, Ø 1¼" R 140). Optimum matching of bending former and back former guarantees material-compatible gliding without cracks and creases. Angle scale provided on each bending former and mark on the back former ensure precise bending. Rapid change of bending formers and back formers.



Info

Bending former and back former for pipes Ø mm/inch O.D.	R mm	X mm 90°	X mm 45°	Bending former material	REMS Sinus									REMS Curvo									REMS Curvo 22 V									REMS Curvo 50									Art.-No.	£
					Cu	Cu-U	St 10312	St 10305-U	St 10305	St 10255	St 50086	V		Cu	Cu 12735	Cu-U	St 10312	St 10305-U	St 10305	St 10255	St 50086	V		Cu	Cu 12735	Cu-U	St 10312	St 10305-U	St 10305	St 10255	St 50086	V		Cu	Cu 12735	Cu-U	St 10312	St 1127	St 10305-U	St 10305	St 10255	St 50086	V		
10	40	45	20	P	●				●			●		●				●			●		●					●			●		▲					▲				▲		581400	199.00
12	45	49	22	P	●		●		●			●		●			●	●			●		●			●			●		▲			▲			▲				▲		581410	151.00
14, 10 U, ¼" (DN 6)	50	53	23	P	●	●			●		●	●		●		●	●		●	●	●		●		●			●		●	●		▲		▲			▲	▲		▲		581420	146.00
15	55	56	25	P	●		●		●			●		●			●		●		●		●			●			●		▲			▲			▲				▲		581430	163.00
15	65	70	32	P	●		●		●			●		●			●		●		●		●			●			●		▲			▲			▲				▲		581290R	181.00
16, 12 U	60	62	28	P	●	●			●		●	●		●		●			●	●	●		●		●			●		●	●		▲		▲			▲			▲	▲		581440	164.00
17, 15 U	56	60	27	P				●			●							●			●							●			●							▲				▲		581110	201.00
18, 14 U, 15 U, ⅜" (DN 10)	70	75	33	P	●	●	●		●		●	●		●	●		●	●		●	●		●		●			●	●		●		▲		▲			▲	▲		▲		581450	165.00
20, 16 U, 18 U	75	80	36	P	●	●		●		●	●	●		●		●		●	●		●		●		●			●		●	●		▲		▲			▲			▲	▲		581080	263.00
21.3, ½" (s = 1.6/2.0/2.6)	103	110	50	S																																■			■				581480	600.00
22, 18 U, ½" (DN 15)	77	81	36	A	●	●			●			●		●		●	●		●	●			●		●			●	●		●		▲		▲	▲		▲	▲				581460	297.00
22, 18 U, ½" (DN 15)	88	91	41	P								●		●		●	●		●				●		●			●					▲		▲	▲		▲					581470	411.00
24, 22 U	75	85	38	P								●						●					●					●					▲					▲					581130	318.00
25	98	103	46	P								●		●					●	●	●		●					●		●	●		▲					▲			▲	▲		581180	350.00
26	98	108	49	A								●							●									●			●							▲				▲		581270	399.00
26.9, ¾" (s = 1.6/2.0/2.6)	102	108	49	S																																■			■				581490	660.00
28[1]	102[3]	108	49	P										●									●										▲										581070	306.00
28, ¾" (DN 20)[2]	102[3]	110	50	A										●			●		●	●			●			●		●	●				▲			▲			▲	▲				581260	388.00
28, ¾" (DN 20)[2]	114	120	54	A										●			●		●	●			●			●		●	●				▲			▲			▲	▲				581310	417.00
30, 28 U	98	105	47	P										●				●										●					▲					▲						581150	386.00
32	98	110	50	P								●									●										●										▲		581280	374.00
32	114	121	54	A										●						●	●										●		▲								▲	▲		581320	435.00
1" (DN 25)	100	105	47	S																																			■					581520	550.00
33.7, 1" (s = 1.6/2.0/2.6)	100	105	47	S																																■			■				581520	550.00
35	100	105	47	S																															■			■		■					581500	550.00
35	140	150	68	A										●																					▲			▲							581350	650.00
40	140	148	67	A																	●												●										▲	581330	600.00
42	140	155	70	S																															■			■		■					581510	590.00
1¼" (DN 32)	140	150	68	S																																			■					581530	570.00
42.4, 1¼" (s = 2.0/2.6)	140	150	68	S																																	■			■				581530	570.00
50	135	143	64	S																																							■	581540	770.00
⅜" (9.5 mm)	43	48	22	P	●									●	●										●	●									▲	▲									581200	252.00
½" (12.7 mm)	52	60	27	P	●									●	●										●	●									▲	▲									581210	240.00
⅝" (15.9 mm)	63	70	32	P	●									●	●										●	●									▲	▲									581220	270.00
¾" (19.1 mm)	75	82	37	P	●									●	●										●	●									▲	▲									581230	321.00
⅞" (22.2 mm)	98	107	48	P	●									●	●										●	●									▲	▲									581240	376.00
1" (25.4 mm)	101	112	50	A										●											●										▲										581360R	490.00
1" (25.4 mm)	101	112	50	P										●											●										▲										581370	373.00
1⅛" (28.6 mm)	102	110	44	A										●	●										●	●									▲	▲									581260	388.00
1⅛" (28.6 mm)	115	117	53	A										●											●										▲										581380	417.00
1¼" (31.8 mm)	114	123	55	A										●																					▲	▲									581320	435.00
1¼" (31.8 mm)	133	145	65	A										●																					▲										581390	680.00
1⅜" (34.9 mm)	100	105	47	S																																■										581500	550.00
1⅜" (34.9 mm)	140	150	68	A										●	●																					▲	▲									581350	650.00
1⅝" (41.3 mm)	140	155	70	S																																■	■									581560	321.00

R mm Bending radius mm at the neutral axis of the bend (DVGW GW 392)
X mm Correction dimension for a 90° or 45° bend
s mm Wall thickness
[1] hard, semi-hard copper pipes, also thin-walled, EN 1057
[2] hard copper pipes EN 1057
[3] According to DVGW work sheet GW 392 for hard and semi-hard copper pipes Ø 28 mm minimum bending radius 114 mm necessary. Wall thickness ≥ 0.9 mm.
▲ Adaptor block 10 – 40, support 10 – 40 (Art.-No. 582120) necessary.
■ Adaptor block 35 – 50, support 35 – 50 (Art.-No. 582110) necessary.
Cu: hard, half-hard, soft copper tubes, also thin-wall, EN 1057
Cu 12735: Copper pipes K65 for refrigeration and air conditioning technology in accordance with EN 12735-1, EN 12449
St 10312: stainless steel pipes of the press fitting systems EN 10312, series 2, EN 10088, EN 10217-7
St 1127: stainless steel pipes EN ISO 1127, EN 10217-7
St 10305-U: coated, soft carbon steel pipes of the press fitting systems EN 10305-3
St 10305: soft precision steel pipes EN 10305-1, EN 10305-2, EN 10305-3, carbon steel pipes EN 10305-3
St 10255: Steel pipes (threaded pipes) EN 10255
St 50086: Electrical installation pipes DIN EN 50086
U: coated
V: multi-layer composite tubes of pressfitting systems
P: Bending former made of glass fibre-reinforced polyamide
A: Bending former made of aluminium
S: Bending former made of spheroidal iron

Bending to size
If a bend is required at a certain point on the pipe, a length correction must be made to suit the pipe size. The correction dimension X specified in Fig. 1 must be considered for a 90° or 45° bend. The set dimension L must be reduced by the amount X here. If, e.g., the dimension L for pipe size 22 is 400 mm and a bend with a bending radius of 77 mm is to be made, the dimension line should be marked on the pipe at 319 mm. This line is then – as shown in Fig. 1 – to be aligned with the 0-mark on the bending former.

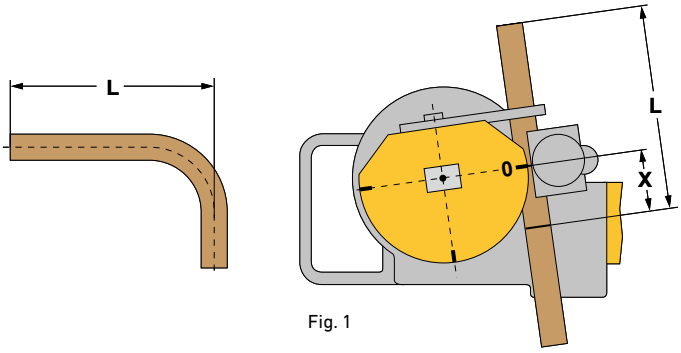


Fig. 1