



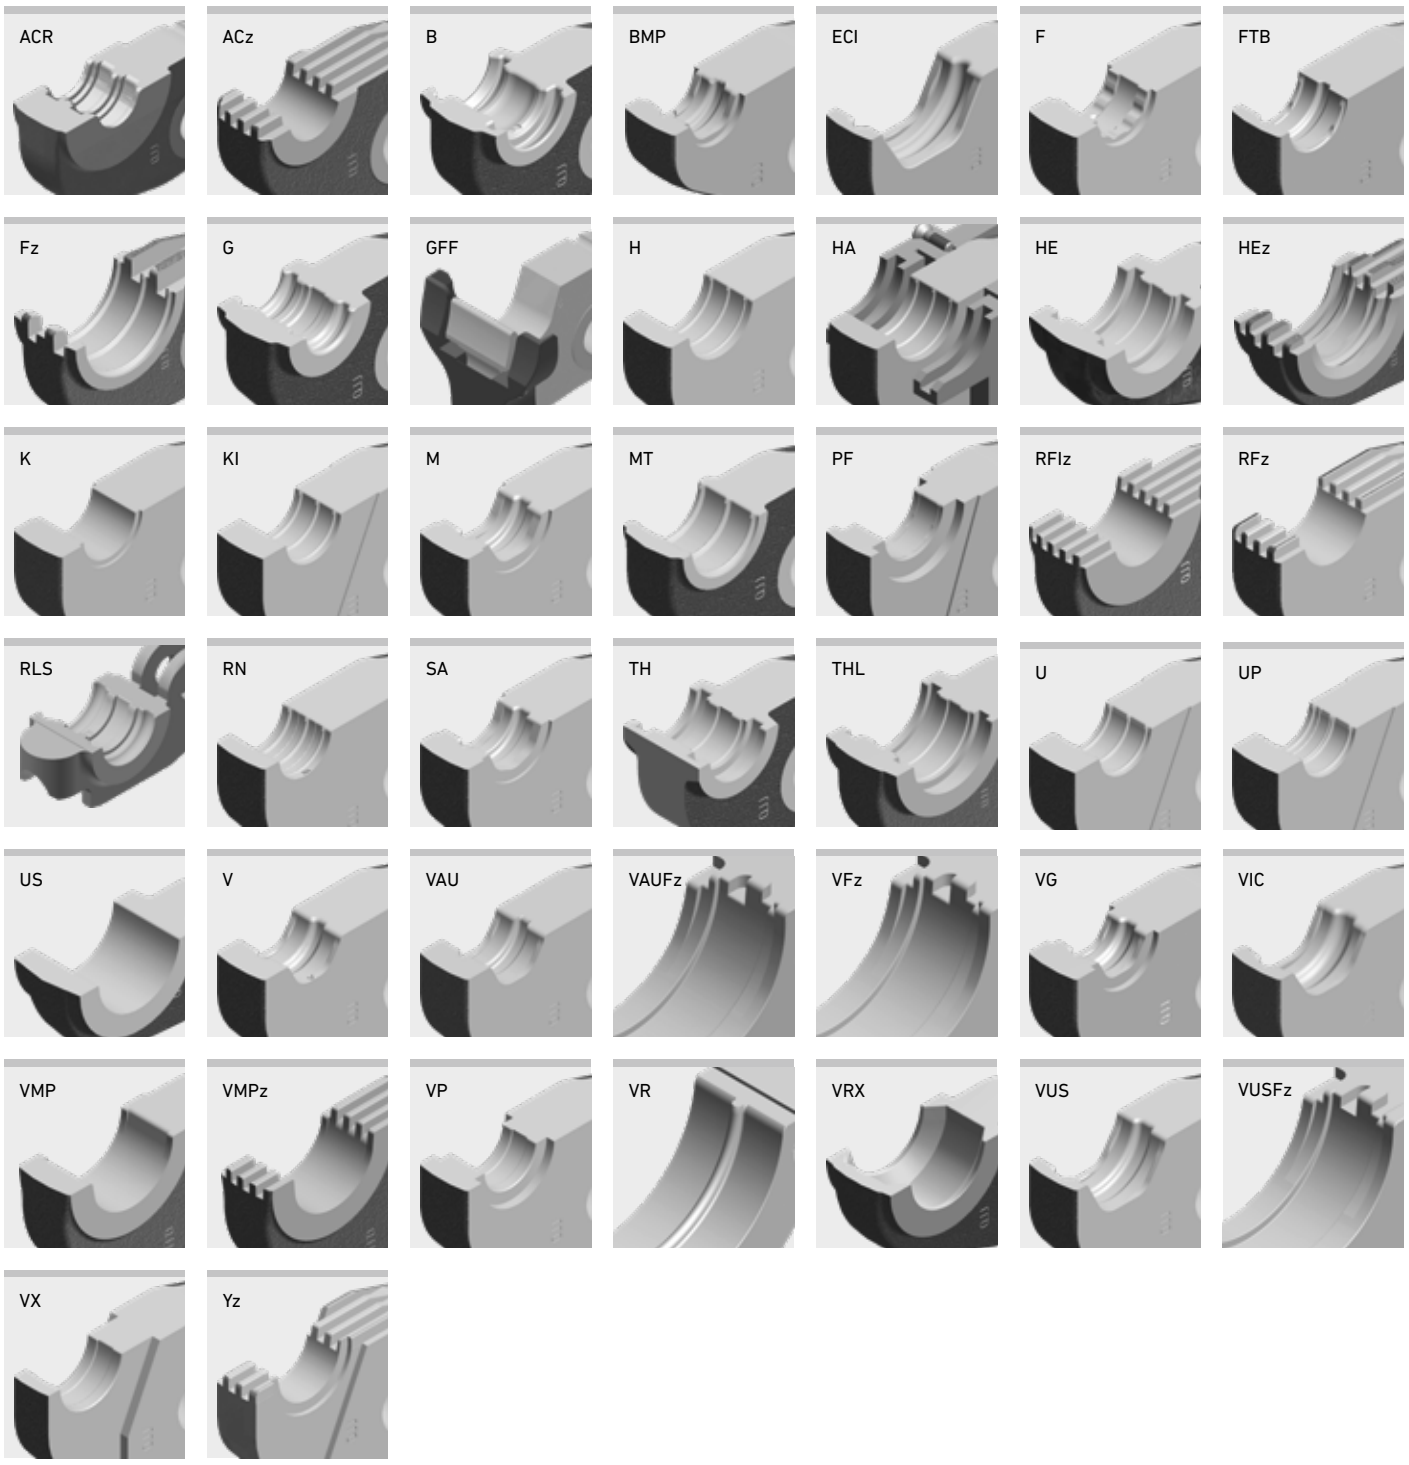

Pressing tongs with teeth prevent formation of burr on the pressfitting. Patent EP 2 027 971

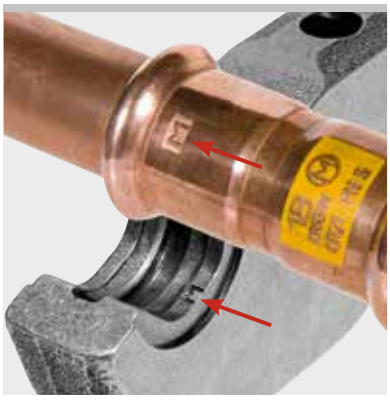

Example REMS pressing tongs M: "M" imprint on pressed fitting for traceability according to EN 1775:2007

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
	A			
Aalberts integrated piping systems VSH MultiPress	U 14*		570760	187.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 14 S (PR-2B)**	Z8	574858 R	153.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
	TH 14*		570455	199.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 14 S (PR-2B)**	Z8	574778 R	163.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
Aalberts integrated piping systems VSH MultiPress Gas[2)]	U 16[2)]		570765	187.00
	U 20[2)]		570775	187.00
	U 25[2)]		570780	187.00
	U 16 S (PR-2B)[2)]	Z8	574860 R	153.00
	U 20 S (PR-2B)[2)]	Z8	574862 R	153.00
	U 25 S (PR-2B)[2)]	Z8	574864 R	153.00
	TH 16[2)]		570460	199.00
	TH 20[2)]		570470	199.00
	TH 16 S (PR-2B)[2)]	Z8	574782 R	163.00
	TH 20 S (PR-2B)[2)]	Z8	574788 R	163.00
Aalberts integrated piping systems VSH PowerPress	VMP ½" G (OD 21,3 mm)		571766 R	229.00
	VMPz ¾" (OD 26,9 mm)		571764	229.00
	VSHVMPz 1" (PR-3B) (OD 33,7 mm)	Z5	572848 R	530.00
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	760.00
	VMPz 1½" (PR-3B) (OD 48,3 mm)	Z5	572844 R	530.00
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845 R	530.00
Aalberts integrated piping systems VSH SudoPress Carbon	V 12		570107	165.00
	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54		570175	395.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	XP 66,7 XL (PR-3S)	Z6 XL[3)] / Z7 XL 45 kN[4)]	579108 R	1,250.00
	M 76,1 XL (PR-3S)	Z6 XL[3)] / Z7 XL 45 kN[4)]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3)] / Z7 XL 45 kN[4)]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3)] / Z7 XL 45 kN[4)]	579111 R	1,460.00
	V 12 S (PR-2B)	Z8	574748 R	136.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
Aalberts integrated piping systems VSH SudoPress Copper	V 12		570107	165.00
	V 14		570132	165.00
	V 15		570115	165.00
	V 16		570137	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54		570175	395.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	V 12 S (PR-2B)	Z8	574748 R	136.00
	V 14 S (PR-2B)	Z8	574750 R	136.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 16 S (PR-2B)	Z8	574754 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
Aalberts integrated piping systems VSH SudoPress Copper Gas	V 12		570107	165.00
	V 14		570132	165.00
	V 15		570115	165.00
	V 16		570137	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54		570175	395.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	V 12 S (PR-2B)	Z8	574748 R	136.00
	V 14 S (PR-2B)	Z8	574750 R	136.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 16 S (PR-2B)	Z8	574754 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
Aalberts integrated piping systems VSH SuoPress Stainless	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54		570175	395.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	M 76,1 XL (PR-3S)	Z6 XL[3)] / Z7 XL 45 kN[4)]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3)] / Z7 XL 45 kN[4)]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3)] / Z7 XL 45 kN[4)]	579111 R	1,460.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
Aalberts integrated piping systems VSH XPress Carbon	M 12		570100	165.00
	M 15		570110	165.00
	M 18[1)]		570120	165.00
	M 22		570130	165.00
	M 28[1)]		570140	165.00
	M 35		570150	165.00
	M 42 (PZ-4G)		570160	540.00
	M 54 (PZ-4G)		570170	540.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	XP 66,7 XL (PR-3S)	Z6 XL[3)] / Z7 XL 45 kN[4)]	579108 R	1,250.00
	M 76,1 XL (PR-3S)	Z6 XL[3)] / Z7 XL 45 kN[4)]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3)] / Z7 XL 45 kN[4)]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3)] / Z7 XL 45 kN[4)]	579111 R	1,460.00
	M 12 S (PR-2B)	Z8	574736 R	136.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
Aalberts integrated piping systems VSH XPress Copper	M 12		570100	165.00
	M 15		570110	165.00
	M 18[1)]		570120	165.00
	M 22		570130	165.00
	M 28[1)]		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	XP 64,0 XL (PR-3S)	Z6 XL[3)] / Z7 XL 45 kN[4)]	579100 R	1,150.00
	XP 66,7 XL (PR-3S)	Z6 XL[3)] / Z7 XL 45 kN[4)]	579108 R	1,250.00
	M 76,1 XL (PR-3S)	Z6 XL[3)] / Z7 XL 45 kN[4)]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3)] / Z7 XL 45 kN[4)]	579110 R	1,460.00
	XP 108,0 XL (PR-3S)	Z6 XL[3)] / Z7 XL 45 kN[4)]	579109 R	1,460.00
	M 12 S (PR-2B)	Z8	574736 R	136.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
Aalberts integrated piping systems VSH XPress Copper Gas	M 15		570110	165.00
	M 18[1)]		570120	165.00
	M 22		570130	165.00
	M 28[1)]		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
Aalberts integrated piping systems VSH XPress Stainless	M 15		570110	165.00
	M 18[1)]		570120	165.00
	M 22		570130	165.00
	M 28[1)]		570140	165.00
	M 35		570150	165.00
	M 42 (PZ-4G)		570160	540.00
	M 54 (PZ-4G)		570170	540.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3)] / Z7 XL 45 kN[4)]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3)] / Z7 XL 45 kN[4)]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3)] / Z7 XL 45 kN[4)]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
Aalberts integrated piping systems VSH XPress Stainless Gas	M 15		570110	165.00
	M 18[1)]		570120	165.00
	M 22		570130	165.00
	M 28[1)]		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
AC-FIX PRESS (Global Piping Systems)	H 12*		570300	179.00
	H 16*		570320	179.00
	H 20*		570350	179.00
	H 25*		570360	179.00
	H 32		570380	179.00
	RFz 12*		571320	208.00
	RFz 16*		571325	208.00
	RFz 20*		571330	208.00
	RFz 25		571335	208.00
	RFz 32		571340	208.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
	VX 16*		571635	229.00
	VX 20*		571640	229.00
AC-FIX PRESS DUO (Global Piping Systems)	RFz 16*		571325	208.00
	RFz 20*		571330	208.00
	RFz 25		571335	208.00
	RFz 32		571340	208.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 26* [12]		570750	218.00
	U 32		570785	218.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 26 S (PR-2B)**	Z8	574866 R	179.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
AC-FIX PRESS-MULTI (Global Piping Systems)	H 16*		570320	179.00
	H 18*		570340	179.00
	H 20*		570350	179.00
	H 25*		570360	179.00
	H 32		570380	179.00
	RFz 16*		571325	208.00
	RFz 20*		571330	208.00
	RFz 25		571335	208.00
	RFz 32		571340	208.00
	U 16*		570765	187.00
	U 18*		570770	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 18 S (PR-2B)**	Z8	574870 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
ACOME MT	ACz 12*		572642	208.00
	ACz 16*		572644	208.00
	ACz 20*		572646	208.00
	ACz 25		572648	208.00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
AHLSELL A-press elförzinkad M	M 12		570100	165.00
	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 12 S (PR-2B)	Z8	574736 R	136.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
AHLSELL A-press elförzinkad V	V 12		570107	165.00
	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 54		570175	395.00
	V 12 S (PR-2B)	Z8	574748 R	136.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
AHLSELL A-press koppar M	M 12		570100	165.00
	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
AHLSELL A-press koppar V	V 12		570107	165.00
	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 54		570175	395.00
	V 12 S (PR-2B)	Z8	574748 R	136.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
AHLSELL A-press rostfritt	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC, see page 230.

4) Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 238.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

8) For making press joints for operating pressure ≤ PN 10.

9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

11) Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

12) Previous designation: C 26 pressing tongs

13) Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used. The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
AIRBEL PRESSCLIM	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
AIRBEL SERTINOX	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
ALB Sistema Multicapa para calefacción y sanitario	TH 16*		570460	199.00
	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)**	Z8	574798 R	163.00
	H 16*		570320	179.00
	H 18*		570340	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	H 40 (PZ-4G)		570390	610.00
	U 16*		570765	187.00
	U 18*		570770	187.00
	U 20*		570775	187.00
	U 26*[12]		570750	218.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 18 S (PR-2B)**	Z8	574870 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 26 S (PR-2B)**	Z8	574866 R	179.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
ALB Sistema Multicapa para Gas	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	H 16*		570320	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 26*[12]		570750	218.00
	U 32		570785	218.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 26 S (PR-2B)**	Z8	574866 R	179.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
ALTECH Altech	RFz 12*		571320	208.00
	RFz 16*		571325	208.00
	RFz 20*		571330	208.00
	RFz 25		571335	208.00
APE MULTYGAS Serie AP Gas	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
APE Serie AP	B 16*		570850	217.00
	B 20*		570860	217.00
	B 26		570870	240.00
	B 32		570880	240.00
	H 16*		570320	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	TH 16*		570460	199.00
	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
APE Serie APL	H 16*		570320	179.00
	H 18*		570340	179.00
	H 20*		570350	179.00
	H 25*		570360	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	TH 16*		570460	199.00
	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 18*		570770	187.00
	U 20*		570775	187.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 18 S (PR-2B)**	Z8	574870 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
AQUATECHNIK Press-fitting metal	H 16*		570320	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)**	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 26*[12]		570750	218.00
	U 32		570785	218.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 26 S (PR-2B)**	Z8	574866 R	179.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
AQUATECHNIK Universal	B 16*		570850	217.00
	B 20*		570860	217.00
	B 26		570870	240.00
	B 32		570880	240.00
	F 16*		570717	190.00
	F 20*		570727	190.00
	F 26*		570730	205.00
	F 32		570735	205.00
	F 16 S (PR-2B)**	Z8	574728 R	156.00
	F 20 S (PR-2B)**	Z8	574730 R	156.00
	F 26 S (PR-2B)**	Z8	574732 R	169.00
	F 32 S (PR-2B)**	Z8	574734 R	169.00
	H 16*		570320	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)**	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 26*[12]		570750	218.00
	U 32		570785	218.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 26 S (PR-2B)**	Z8	574866 R	179.00
	U 32 S (PR-2B)**	Z8	574868 R	179.00

All prices excl. VAT

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
ARKA DUROsystem	H 16*		570320	179.00
	H 20*		570350	179.00
	H 25*		570360	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
ARKA System Calido	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
ARKA System Calido Gas	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
Aschl NIR	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
ASSOTHERM IPC-RAC Carbon Steel	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PZ-4G)		570160	540.00
	M 54 (PZ-4G)		570170	540.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
ASSOTHERM IPI-RAX Inox	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PZ-4G)		570160	540.00
	M 54 (PZ-4G)		570170	540.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
ASSOTHERM IPI-RAX Inox Gas	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PZ-4G)		570160	540.00
	M 54 (PZ-4G)		570170	540.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)[7]	Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)[7]	Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
ASSOTHERM IPM-Multistrato	H 16*		570320	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	THL 32		570487	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 26*[12]		570750	218.00
	U 32		570785	218.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 26 S (PR-2B)**	Z8	574866 R	179.00
	U 32 S (PR-2B)	Z8	574868 R	179.00

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC, see page 230.

4) Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 238.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

8) For making press joints for operating pressure ≤ PN 10.

9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

11) Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

12) Previous designation: C 26 pressing tongs

13) Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used. The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
ASSOTHERM IPR-RRA Copper	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PZ-4G)		570160	540.00
	M 54 (PZ-4G)		570170	540.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
ASSOTHERM IPR-RRA Copper Gas	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
ASTM F 1807 (Fittings with Copper Crimp Ring for PEX tubing)	US ⅜"*		571450	226.00
	US ½"*		571455	226.00
	US ¾"*		571460	226.00
	US 1"*		571465	226.00
	US 1 ¼"		571470	226.00
	US 1 ½"		571475	226.00
	US 2"		571477	305.00
ATUSA ITALIA INSTALPRESS CARBON STEEL PRESS FITTINGS	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
ATUSA ITALIA INSTALPRESS STAINLESS STEEL PRESS FITTINGS	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
AUSTEC PEX-B, PEX-AL-PEX (AUS)	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 32		570480	199.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
AUSTEC PEX-AL-PEX GAS (AUS)	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 32		570480	199.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
AYOR FIXOCONNECT Press	H 12*		570300	179.00
	H 16*		570320	179.00
	H 20*		570350	179.00
	H 25*		570360	179.00
	RFz 12*		571320	208.00
	RFz 16*		571325	208.00
	RFz 20*		571330	208.00
	RFz 25		571335	208.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
AYOR FIXOMULTIX	H 16*		570320	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 26*[12]		570750	218.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 63 (PZ-S)		572365	690.00
	U 75 (PR-3B)	Z4	572828 R	710.00
AYOR SOMATHERM FOR YOU -1	H 16*		570320	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 26*[12]		570750	218.00
AYOR SOMATHERM FOR YOU -2	H 12*		570300	179.00
	H 16*		570320	179.00
	H 20*		570350	179.00
	H 25*		570360	179.00
	RFz 12*		571320	208.00
	RFz 16*		571325	208.00
	RFz 20*		571330	208.00
	RFz 25		571335	208.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00

B

Bampi BALPEX serie LP	TH 16*		570460	199.00
	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 18*		570770	187.00
	U 20*		570775	187.00
	U 26*[12]		570750	218.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 63 (PZ-S)		572365	690.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 18 S (PR-2B)**	Z8	574870 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 26 S (PR-2B)**	Z8	574866 R	179.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
Bampi BALPEX serie MP	TH 16*		570460	199.00
	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
Bampi BALPEX Gas	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00

All prices excl. VAT

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
BARBI EASYPRESS (Industrial Blansol)	H 12*		570300	179.00
	H 16*		570320	179.00
	H 20*		570350	179.00
	H 25*		570360	179.00
	H 32		570380	179.00
	RFz 12*		571320	208.00
	RFz 16*		571325	208.00
	RFz 20*		571330	208.00
	RFz 25		571335	208.00
	RFz 32		571340	208.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
BARBI MULTIPEX (Industrial Blansol)	H 14*		570310	179.00
	H 16*		570320	179.00
	H 18*		570340	179.00
	H 20*		570350	179.00
	H 25*		570360	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	RFz 16*		571325	208.00
	RFz 18*		571327	208.00
	RFz 20*		571330	208.00
	RFz 25		571335	208.00
	RFz 32		571340	208.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)**	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 18*		570770	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 26* [12]		570750	218.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 63 (PZ-S)		572365	690.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 18 S (PR-2B)**	Z8	574870 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 26 S (PR-2B)**	Z8	574866 R	179.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
BEGETUBE/ IVAR	B 14*		570845	217.00
	B 16*		570850	217.00
	B 18*		570855	217.00
	B 20*		570860	217.00
	B 26		570870	240.00
	B 32		570880	240.00
	Fz 40		570742	219.00
	Fz 50		570747	332.00
	F 63 (PZ-S)		572385	690.00
	Fz 75 (PR-3B)	Z4	572830 R	670.00
Béné inox Série 41	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL [3] / Z7 XL 45 kN [4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL [3] / Z7 XL 45 kN [4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL [3] / Z7 XL 45 kN [4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
Brass Form Master-Al-Pex	H 16*		570320	179.00
	H 18*		570340	179.00
	H 20*		570350	179.00
	TH 16*		570460	199.00
	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 18*		570770	187.00
	U 20*		570775	187.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 18 S (PR-2B)**	Z8	574870 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
Brass & Fittings PRESSMAN MultiPress	RFz 16*		571325	208.00
	RFz 18*		571327	208.00
	ACz 20*		572646	208.00
	RFz 25		571335	208.00
	RFz 32		571340	208.00
Brass & Fittings PRESSMAN RetiPress	RFz 16*		571325	208.00
	RFz 18*		571327	208.00
	ACz 20*		572646	208.00
	RFz 25		571335	208.00
	RFz 32		571340	208.00
BRASSTECH MULTItermoSAN	B 16*		570850	217.00
	B 20*		570860	217.00
Brasspress	B 26		570870	240.00
	B 32		570880	240.00
	F 16*		570717	190.00
	F 20*		570727	190.00
	F 26*		570730	205.00
	F 16 S (PR-2B)**	Z8	574728 R	156.00
	F 20 S (PR-2B)**	Z8	574730 R	156.00
	F 26 S (PR-2B)**	Z8	574732 R	169.00
	H 16*		570320	179.00
	H 18*		570340	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	TH 16*		570460	199.00
	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 18*		570770	187.00
	U 20*		570775	187.00
	U 32		570785	218.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 18 S (PR-2B)**	Z8	574870 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 32 S (PR-2B)	Z8	574868 R	179.00

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC, see page 230.

4) Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 238.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

8) For making press joints for operating pressure ≤ PN 10.

9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

11) Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

12) Previous designation: C 26 pressing tongs

13) Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used. The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
	C			
Cello Products	VUS ½" (OD 15,9 mm)		571770	199.00
>B< Press	VUS ¾" (OD 22,2 mm)		571775	199.00
	VUS 1" (OD 28,6 mm)		571780	199.00
	VUS 1¼" (OD 34,9 mm)		571785	199.00
	VUS 1½" (OD 41,3 mm)		571790	385.00
	VUS 2" (OD 54,0 mm)		571795	395.00
CGR	H 16*		570320	179.00
DYNAFLU	H 20*		570350	179.00
multicouche	H 26*		570370	179.00
	H 32		570380	179.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 26* [12]		570750	218.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 63 (PZ-S)		572365	690.00
CGR	H 12*		570300	179.00
DYNAFLU	H 16*		570320	179.00
PER	H 20*		570350	179.00
	H 25*		570360	179.00
	RFz 12*		571320	208.00
	RFz 16*		571325	208.00
	RFz 20*		571330	208.00
	RFz 25		571335	208.00
CHIALI	TH 16*		570460	199.00
CHIALIPEX	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
CHIBRO	M 15		570110	165.00
Pressfitting Cuni	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
CHIBRO	M 15		570110	165.00
Pressfitting Inox	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
Climatrix	H 16*		570320	179.00
Climatrix Rhinopex	H 20*		570350	179.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 26* [12]		570750	218.00
	TH 14*		570455	199.00
	TH 16*		570460	199.00
	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 14 S (PR-2B)**	Mini Z8	574778 R	163.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
Climatrix	TH 11,6*		570482	199.00
Variotherm	TH 16*		570460	199.00
System TH	TH 16 S (PR-2B)**	Z8	574782 R	163.00
ClouSet	TH 16*		570460	199.00
	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
Comap	RFz 12*		571320	208.00
PEX Press	RFz 16*		571325	208.00
	RFz 20*		571330	208.00
	RFz 25		571335	208.00
Comap	TH 14*		570455	199.00
Multiskin	TH 16*		570460	199.00
	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	THL 32		570487	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	THz 75 (PR-3B)	Z4	572829 R	670.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 14*		570760	187.00
	U 16*		570765	187.00
	U 18*		570770	187.00
	U 20*		570775	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 63 (PZ-S)		572365	690.00
	U 75 (PR-3B)	Z4	572828 R	710.00
	H 14*		570310	179.00
	H 16*		570320	179.00
	H 18*		570340	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	H 40 (PZ-4G)		570390	610.00
Comap	TH 16*		570460	199.00
Multiskin Gas	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	THL 32		570487	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 32		570785	218.00
	H 16*		570320	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
COMISA	TH 14*		570455	199.00
Press System	TH 16*		570460	199.00
	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 14 S (PR-2B)**	Z8	574778 R	163.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)**	Z8	574798 R	163.00
	H 14*		570310	179.00
	H 16*		570320	179.00
	H 18*		570340	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	B 14*		570845	217.00
	B 16*		570850	217.00
	B 18*		570855	217.00
	B 20*		570860	217.00
	B 26		570870	240.00
	B 32		570880	240.00
COMISA	TH 16*		570460	199.00
Press System Gas	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
CONEL	M 15		570110	165.00
CONNECT INOX	M 18		570120	165.00
	M 22		570130	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54 (PR-2B)	Z2	572851 R	372.00

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
CONEL CONNECT MULTI	F 16*		570717	190.00
	F 20*		570727	190.00
	F 26*		570730	205.00
	F 32		570735	205.00
	F 16 S (PR-2B)**	Z8	574728 R	156.00
	F 20 S (PR-2B)**	Z8	574730 R	156.00
	F 26 S (PR-2B)**	Z8	574732 R	169.00
	F 32 S (PR-2B)**	Z8	574734 R	169.00
	H 16*		570320	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)**	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
(DN 26)	U 25*		570780	187.00
	U 32		570785	218.00
	VP 16*		570910	198.00
	VP 20*		570915	198.00
	VP 32		570925	219.00
CONEL CONNECT MV2	F 16*		570717	190.00
	F 20*		570727	190.00
	F 26*		570730	205.00
	F 32		570735	205.00
	F 16 S (PR-2B)**	Z8	574728 R	156.00
	F 20 S (PR-2B)**	Z8	574730 R	156.00
	F 26 S (PR-2B)**	Z8	574732 R	169.00
	F 32 S (PR-2B)**	Z8	574734 R	169.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)**	Z8	574798 R	163.00
Conex Bänninger <A> Press Inox (304)	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PZ-4G)		570160	540.00
	M 54 (PZ-4G)		570170	540.00
	M 35 (PR-3S)	Z2	572727 R	720.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
Conex Bänninger <A> Press Inox (316L)	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PZ-4G)		570160	540.00
	M 54 (PZ-4G)		570170	540.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 35 (PR-3S)	Z2	572727 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
Conex Bänninger >B< Flex	F 16*		570717	190.00
	F 18*		570720	190.00
	F 20*		570727	190.00
	F 32		570735	205.00
	F 16 S (PR-2B)**	Z8	574728 R	156.00
	F 20 S (PR-2B)**	Z8	574730 R	156.00
	F 32 S (PR-2B)	Z8	574734 R	169.00
	H 16*		570320	179.00
	H 18*		570340	179.00
	H 20*		570350	179.00
	H 25*		570360	179.00
	H 32		570380	179.00
	RFz 16*		571325	208.00
	RFz 18*		571327	208.00
	RFz 20*		571330	208.00
	RFz 25		571335	208.00
	RFz 32		571340	208.00
	TH 16*		570460	199.00
	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 18*		570770	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PZ-S)		572365	690.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 75 (PR-3B)	Z4	572828 R	710.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 18 S (PR-2B)**	Z8	574870 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
Conex Bänninger >B< Flex Gas	F 16*		570717	190.00
	F 18*		570720	190.00
	F 20*		570727	190.00
	F 32		570735	205.00
	F 16 S (PR-2B)**	Z8	574728 R	156.00
	F 20 S (PR-2B)**	Z8	574730 R	156.00
	F 32 S (PR-2B)	Z8	574734 R	169.00
	H 16*		570320	179.00
	H 18*		570340	179.00
	H 20*		570350	179.00
	H 25*		570360	179.00
	H 32		570380	179.00
	RFz 16*		571325	208.00
	RFz 18*		571327	208.00
	RFz 20*		571330	208.00
	RFz 25		571335	208.00
	RFz 32		571340	208.00
	TH 16*		570460	199.00
	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 18*		570770	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 18 S (PR-2B)**	Z8	574870 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 32 S (PR-2B)	Z8	574868 R	179.00

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC, see page 230.

4) Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 238.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

8) For making press joints for operating pressure ≤ PN 10.

9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

11) Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

12) Previous designation: C 26 pressing tongs

13) Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used. The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
Conex Bänninger >B< MaxiPro	BMP ¼"		571700 R	197.00
	BMP ⅜"		571702 R	197.00
	BMP ½"		571704 R	197.00
	BMP ⅝"		571706 R	197.00
	BMP ¾"		571708 R	197.00
	BMP ⅞"		571710 R	197.00
	BMP 1"		571712 R	197.00
	BMP 1⅛"		571714 R	197.00
	BMP 1 ⅜" (PR-3S)	Z2	572740 R	720.00
	BMP 1 ⅝" (PR-3S)	Z2	572718 R	720.00
	BMP ¼" S (PR-2B)	Z8	574810 R	162.00
	BMP 8 / BMP 5/16" S (PR-2B)	Z8	574712 R	162.00
	BMP ⅜" S (PR-2B)	Z8	574812 R	162.00
	BMP ½" S (PR-2B)	Z8	574814 R	162.00
	BMP ⅝" S (PR-2B)	Z8	574816 R	162.00
	BMP ¾" S (PR-2B)	Z8	574818 R	162.00
	BMP ⅞" S (PR-2B)	Z8	574820 R	162.00
	BMP 1" S (PR-2B)	Z8	574822 R	162.00
	BMP 1⅛" S (PR-2B)	Z8	574824 R	162.00
Conex Bänninger >B< One (ITA) water & gas	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 54		570175	395.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
Conex Bänninger >B< Press (EN)[9]	V 12		570107	165.00
	V 14		570132	165.00
	V 15		570115	165.00
	V 16		570137	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 54		570175	395.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	V 12 S (PR-2B)	Z8	574748 R	136.00
	V 14 S (PR-2B)	Z8	574750 R	136.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 16 S (PR-2B)	Z8	574754 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
	M 15		570110	165.00
	M 22		570130	165.00
	M 28		570140	165.00
Conex Bänninger >B< Press XL (EN)[9]	VFz 64,0 (PR-3B)	Z5	572815 R	670.00
	CBVFz 66,7 (PR-3B)	Z5	572847 R	670.00
	VFz 76,1 (PR-3B)[6]	Z5	572816 R	670.00
	VFz 88,9 (PR-3B)[6]	Z5	572817 R	710.00
	VFz 108,0 (PR-3B)[6]	Z5	572818 R	710.00
Conex Bänninger >B< Press (ASTM)[10]	VUS ½" (OD 15,9 mm)		571770	199.00
	VUS ¾" (OD 22,2 mm)		571775	199.00
	VUS 1" (OD 28,6 mm)		571780	199.00
	VUS 1¼" (OD 34,9 mm)		571785	199.00
	VUS 1½" (OD 41,3 mm)		571790	385.00
	VUS 2" (OD 54,0 mm)		571795	395.00
	VUS ½" S (PR-2B) (OD 15,9 mm)	Z8	574764 R	163.00
	VUS ¾" S (PR-2B) (OD 22,2 mm)	Z8	574766 R	163.00
	VUS 1" S (PR-2B) (OD 28,6 mm)	Z8	574768 R	163.00
	VUS 1¼" S (PR-2B) (OD 34,9 mm)	Z8	574770 R	163.00
Conex Bänninger >B< Press XL (ASTM)[10]	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819 R	670.00
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	670.00
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	710.00
Conex Bänninger >B< Press Carbon	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 54		570175	395.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
Conex Bänninger >B< Press Carbon XL	XP 64,0 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579100 R	1,150.00
	XP 66,7 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579108 R	1,250.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	CBM 88,9 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579144 R	1,460.00
	CBM 108,0 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579146 R	1,460.00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
Conex Bänninger >B< Press Gas (EN)[9]	V 12		570107	165.00
	V 14		570132	165.00
	V 15		570115	165.00
	V 16		570137	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 54		570175	395.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	V 12 S (PR-2B)	Z8	574748 R	136.00
	V 14 S (PR-2B)	Z8	574750 R	136.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 16 S (PR-2B)	Z8	574754 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
Conex Bänninger >B< Press in Irish sizes	VI ½" S (PR-2B) (OD 14,7 mm)	Z8	574850 R	162.00
	VI ¾" S (PR-2B) (OD 21,0 mm)	Z8	574852 R	162.00
	VI 1" S (PR-2B) (OD 27,4 mm)	Z8	574854 R	162.00
Conex Bänninger >B< Press Inox	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 54		570175	395.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
Conex Bänninger >B< Press Inox 304	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 54		570175	395.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
Conex Bänninger >B< Press Inox 316L	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 54		570175	395.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
Conex Bänninger >B< Press Inox XL	XP 64,0 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579100 R	1,150.00
	XP 66,7 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579108 R	1,250.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	CBM 88,9 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579144 R	1,460.00
	CBM 108,0 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579146 R	1,460.00
Conex Bänninger >B< Press Solar	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00

D

Debrunner Acifer d-a Presssystem C-Stahl	M 12		570100	165.00
	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 12 S (PR-2B)	Z8	574736 R	136.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
DUOPIPE SYSTEMS	U 16*		570765	187.00
DUOFIL MKSYSTEM	U 18*		570770	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 18 S (PR-2B)**	Z8	574870 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
DW Verbundrohr	U 16*		570765	187.00
multitubo systems	U 18*		570770	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 63 (PZ-S)		572365	690.00
	U 75 (PR-3B)	Z4	572828 R	710.00
	E			
EBRILLE	U 16*		570765	187.00
Isomonflex	U 20*		570775	187.00
	U 25*		570780	187.00
	U 26* [12]		570750	218.00
	U 32		570785	218.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 26 S (PR-2B)**	Z8	574866 R	179.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
	H 26*		570370	179.00
	TH 26*		570475	199.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
EBRILLE	U 16*		570765	187.00
Monflex	U 20*		570775	187.00
	U 25*		570780	187.00
	U 26* [12]		570750	218.00
	U 32		570785	218.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 26 S (PR-2B)**	Z8	574866 R	179.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
	H 26*		570370	179.00
	TH 26*		570475	199.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
EFFEBI	M 15		570110	165.00
EFFEBI-PRESS	M 18		570120	165.00
Aisi316	M 22		570130	165.00
System M Profile[1]	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)[8]	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
EFFEBI	V 12		570107	165.00
EFFEBI-PRESS	V 15		570115	165.00
Aisi316	V 18		570125	165.00
System V Profile	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54		570175	395.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	V 12 S (PR-2B)	Z8	574748 R	136.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
EFFEBI	M 12		570100	165.00
EFFEBI-PRESS	M 15		570110	165.00
Carbon-S	M 18		570120	165.00
System M Profile[1]	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 12 S (PR-2B)	Z8	574736 R	136.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
EFFEBI	V 12		570107	165.00
EFFEBI-PRESS	V 15		570115	165.00
Carbon-S	V 18		570125	165.00
System V Profile	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54		570175	395.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	V 12 S (PR-2B)	Z8	574748 R	136.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
EFFEBI	V 12		570107	165.00
EFFEBI-PRESS	V 15		570115	165.00
COPPER	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54		570175	395.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	V 12 S (PR-2B)	Z8	574748 R	136.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC, see page 230.

4) Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 238.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

8) For making press joints for operating pressure ≤ PN 10.

9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

11) Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

12) Previous designation: C 26 pressing tongs

13) Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used. The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
EFFEBI	V 12		570107	165.00
EFFEBI-PRESS	V 15		570115	165.00
UNICO	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54		570175	395.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	V 12 S (PR-2B)	Z8	574748 R	136.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
EFFEBI	V 12		570107	165.00
EFFEBI-PRESS	V 15		570115	165.00
UNICO	V 18		570125	165.00
(GAS)	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54		570175	395.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	V 12 S (PR-2B)	Z8	574748 R	136.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
EFFEBI	M 15		570110	165.00
PRESSTIGE	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54		570175	395.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
EFFEBI	M 15		570110	165.00
PRESSTIGE 4E05	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
EFFEBI	M 15		570110	165.00
PRESSTIGE-GAS	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54		570175	395.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
EFFEBI	TH 16*		570460	199.00
TOF-GAS	TH 20*		570470	199.00
MULTIPINZA	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)**	Z8	574798 R	163.00
	H 16*		570320	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	H 40 (PZ-4G)		570390	610.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 26* [12]		570750	218.00
	U 32		570785	218.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 26 S (PR-2B)**	Z8	574866 R	179.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
EFFEBI	TH 16*		570460	199.00
TOF	TH 18*		570465	199.00
MULTIPINZA	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)**	Z8	574798 R	163.00
	F 16*		570717	190.00
	F 18*		570720	190.00
	F 20*		570727	190.00
	F 26*		570730	205.00
	F 32		570735	205.00
	Fz 40		570742	219.00
	Fz 50		570747	332.00
	F 63 (PZ-S)		572385	690.00
	F 16 S (PR-2B)**	Z8	574728 R	156.00
	F 20 S (PR-2B)**	Z8	574730 R	156.00
	F 26 S (PR-2B)**	Z8	574732 R	169.00
	F 32 S (PR-2B)**	Z8	574734 R	169.00
	H 16*		570320	179.00
	H 18*		570340	179.00
	H 20*		570350	179.00
	H 25*		570360	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	H 40 (PZ-4G)		570390	610.00
	U 16*		570765	187.00
	U 18*		570770	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 26* [12]		570750	218.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 63 (PZ-S)		572365	690.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 18 S (PR-2B)**	Z8	574870 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 26 S (PR-2B)**	Z8	574866 R	179.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
	B 16*		570850	217.00
	B 18*		570855	217.00
	B 20*		570860	217.00
	B 26		570870	240.00
	B 32		570880	240.00
EFIELD	U 16*		570765	187.00
MULTILAYER PRESS	U 18*		570770	187.00
GAS	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
EFIELD	U 16*		570765	187.00
MULTILAYER PRESS	U 18*		570770	187.00
WATER	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PZ-S)		572365	690.00
Elkhart	VUS ½" (OD 15,9 mm)		571770	199.00
APOLLOXPRESS	VUS ¾" (OD 22,2 mm)		571775	199.00
Fittings Copper	VUS 1" (OD 28,6 mm)		571780	199.00
and Low-Lead	VUS 1¼" (OD 34,9 mm)		571785	199.00
Brass	VUS 1½" (OD 41,3 mm)		571790	385.00
	VUS 2" (OD 54,0 mm)		571795	395.00
Elkhart	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819 R	670.00
APOLLOXPRESS	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	670.00
LD-C Fittings	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	710.00
Copper				

All prices excl. VAT

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
EMMETI GERPEX-FIVPRESS	B 16*		570850	217.00
	B 20*		570860	217.00
	B 26		570870	240.00
	B 32		570880	240.00
	H 16*		570320	179.00
	H 20*		570350	179.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	U 16*		570765	187.00
	U 20*		570775	187.00
EMPUR	TH 14*		570455	199.00
	TH 15*		570457	199.00
	TH 16*		570460	199.00
	TH 17*		570462	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 14 S (PR-2B)**	Z8	574778 R	163.00
	TH 15 S (PR-2B)**	Z8	574780 R	163.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 17 S (PR-2B)**	Z8	574784 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
Esta Rohr simplesta SH M	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PZ-4G)		570160	540.00
	M 54 (PZ-4G)		570170	540.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)[8]	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
Esta Rohr simplesta ST M	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PZ-4G)		570160	540.00
	M 54 (PZ-4G)		570170	540.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)[8]	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
Esta Rohr simplesta SH V	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 54		570175	395.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	VFz 76,1 (PR-3B)	Z5	572816 R	670.00
	VFz 88,9 (PR-3B)	Z5	572817 R	710.00
	VFz 108,0 (PR-3B)	Z5	572818 R	710.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
Esta Rohr simplesta ST V	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 54		570175	395.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	VFz 76,1 (PR-3B)	Z5	572816 R	670.00
	VFz 88,9 (PR-3B)	Z5	572817 R	710.00
	VFz 108,0 (PR-3B)	Z5	572818 R	710.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
EUROTUBI EUROPA C-Steel Pressfitting System M-Profile[1]	M 12		570100	165.00
	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 12 S (PR-2B)	Z8	574736 R	136.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
EUROTUBI EUROPA Inox Pressfitting System M-Profile[1]	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
Evans Components Presslok	VAU 15 (½") (OD 12,7 mm)		572687	170.00
	VAU 20 (¾") (OD 19,1 mm)		572689	170.00
	VAU 25 (1") (OD 25,4 mm)		572691	170.00
	ECI 1½"		571932	214.00
	ECI 2" (PZ-4G)		571934	540.00
	ECI 2½" XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579104 R	1,150.00
	ECI 3" XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579105 R	1,250.00
	ECI 4" XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579106 R	1,460.00

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC, see page 230.

4) Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 238.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

8) For making press joints for operating pressure ≤ PN 10.

9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

11) Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

12) Previous designation: C 26 pressing tongs

13) Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used. The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
	F			
FAR Rubinetterie PRESSFAR	TH 14*		570455	199.00
	TH 16*		570460	199.00
	TH 17*		570462	199.00
	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 14 S (PR-2B)**	Z8	574778 R	163.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 17 S (PR-2B)**	Z8	574784 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	H 14*		570310	179.00
	H 16*		570320	179.00
	H 18*		570340	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	H 40 (PZ-4G)		570390	610.00
	U 14*		570760	187.00
	U 16*		570765	187.00
	U 18*		570770	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 26* [12]		570750	218.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 63 (PZ-S)		572365	690.00
	U 14 S (PR-2B)**	Z8	574858 R	153.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 18 S (PR-2B)**	Z8	574870 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 26 S (PR-2B)**	Z8	574866 R	179.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
F.B.Q. BARONIO BQ PRESS SOLAR	V 12		570107	165.00
	V 14		570132	165.00
	V 15		570115	165.00
	V 16		570137	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54		570175	395.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	V 12 S (PR-2B)	Z8	574748 R	136.00
	V 14 S (PR-2B)	Z8	574750 R	136.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 16 S (PR-2B)	Z8	574754 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
F.B.Q. BARONIO BQ PRESS WATER	V 12		570107	165.00
	V 14		570132	165.00
	V 15		570115	165.00
	V 16		570137	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54		570175	395.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	V 12 S (PR-2B)	Z8	574748 R	136.00
	V 14 S (PR-2B)	Z8	574750 R	136.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 16 S (PR-2B)	Z8	574754 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
F.B.Q. BARONIO BQ PRESS GAS	V 12		570107	165.00
	V 14		570132	165.00
	V 15		570115	165.00
	V 16		570137	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54		570175	395.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	V 12 S (PR-2B)	Z8	574748 R	136.00
	V 14 S (PR-2B)	Z8	574750 R	136.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 16 S (PR-2B)	Z8	574754 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
FERCOFLOOR DUO Press FERCO PEX	RFz 16*		571325	208.00
	RFz 20*		571330	208.00
	RFz 25		571335	208.00
	RFz 32		571340	208.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 32 S (PR-2B)**	Z8	574798 R	163.00
FERCOFLOOR DUO Press MULTIFER	RFz 16*		571325	208.00
	RFz 20*		571330	208.00
	RFz 25		571335	208.00
	RFz 32		571340	208.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 32 S (PR-2B)**	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 18*		570770	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PZ-S)		572365	690.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 18 S (PR-2B)**	Z8	574870 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
FERRO systems BRASELI GPF GAS	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
FERRO systems BRASELI GPF MULT Pressfitting MULTICAPA	U 16*		570765	187.00
	U 18*		570770	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 18 S (PR-2B)**	Z8	574870 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 32 S (PR-2B)**	Z8	574868 R	179.00
FERRO systems BRASELI GPF PPSU Pressfitting PEX y MULTICAPA	U 16*		570765	187.00
	U 18*		570770	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 18 S (PR-2B)**	Z8	574870 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
FERRO systems BRASELI GPF PRESS Pressfitting PEX	RFz 16*		571325	208.00
	RFz 20*		571330	208.00
	RFz 25		571335	208.00
	RFz 32		571340	208.00
FILINOX Filpress	FTB 15		571432	244.00
	FTB 18		571434	244.00
	FTB 22		571436	244.00
	FTB 28		571438	244.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z7 XL 45 kN [4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z7 XL 45 kN [4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z7 XL 45 kN [4]	579111 R	1,460.00
FILINOX Instalpress Steel	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z7 XL 45 kN [4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z7 XL 45 kN [4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z7 XL 45 kN [4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
FILINOX Instalpress Inox	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
FITTINGS ESTÁNDAR ECO-PRESS	RFz 16*		571325	208.00
	RFz 20*		571330	208.00
	RFz 25		571335	208.00
	RFz 32		571340	208.00
FITTINGS ESTÁNDAR MULTICAPA	RFz 16*		571325	208.00
	RFz 18*		571327	208.00
	RFz 20*		571330	208.00
	RFz 25		571335	208.00
	RFz 32		571340	208.00
FITTINGS ESTÁNDAR PE-X	RFz 16*		571325	208.00
	RFz 20*		571330	208.00
	RFz 25		571335	208.00
	RFz 32		571340	208.00
FORNARA ForPress	B 16*		570850	217.00
	B 20*		570860	217.00
	B 26		570870	240.00
	B 32		570880	240.00
	F 16*		570717	190.00
	F 20*		570727	190.00
	F 26*		570730	205.00
	F 32		570735	205.00
	F 16 S (PR-2B)**	Z8	574728 R	156.00
	F 20 S (PR-2B)**	Z8	574730 R	156.00
	F 26 S (PR-2B)**	Z8	574732 R	169.00
	F 32 S (PR-2B)**	Z8	574734 R	169.00
	H 16*		570320	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 26*[12]		570750	218.00
	U 32		570785	218.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 26 S (PR-2B)**	Z8	574866 R	179.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
FORZA WATER CRIMP (AUS)	K16/P18*		572600	208.00
	K/20*		572605	208.00
	K/25*		572610	208.00
	K32		572615	208.00
	K1/40		572620	208.00
	K1/50		572625	340.00
FORZA STAINLESS WATER CRIMP	K16/P18*		572600	208.00
	K/20*		572605	208.00
FORZA STESSO PEX WATER AND GAS CRIMP (AUS)	U 16*		570765	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PZ-S)		572365	690.00
FORZA GAS CRIMP (AUS)	K16/P18*		572600	208.00
	K/20*		572605	208.00
	K/25*		572610	208.00
	K32		572615	208.00
	K1/40		572620	208.00
	K1/50		572625	340.00
FORZA COPPER V PRESS (AUS)	VAU 15 (OD 12,7 mm)		572687	170.00
	VAU 20 (OD 19,1 mm)		572689	170.00
	VAU 25 (OD 25,4 mm)		572691	170.00
	VAU 32 (OD 31,8 mm)		572693	180.00
	VAU 40 (OD 38,1 mm)		572695	266.00
	VAU 50 (OD 50,8 mm)		572697	471.00
	VAUFz 65 (PR-3B) (OD 63,5 mm)	Z5	572839 R	670.00
	VAUFz 80 (PR-3B) (OD 76,2 mm)	Z5	572840 R	670.00
	VAUFz 100 (PR-3B) (OD 101,6 mm)	Z5	572841 R	710.00
	VAU 15 S (PR-2B) (OD 12,7 mm)	Z8	574804 R	140.00
	VAU 20 S (PR-2B)** (OD 19,1 mm)	Z8	574806 R	140.00
	VAU 25 S (PR-2B)** (OD 25,4 mm)	Z8	574808 R	140.00
FORZA STAINLESS V PRESS (AUS)	V 15		570115	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 54		570175	395.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
FRABO	> Rubinetterie Bresciane Bonomi			
Fränkische alpex-duo XS	F 16*		570717	190.00
	F 20*		570727	190.00
	F 26*		570730	205.00
	F 32		570735	205.00
	F 16 S (PR-2B)**	Z8	574728 R	156.00
	F 20 S (PR-2B)**	Z8	574730 R	156.00
	F 26 S (PR-2B)**	Z8	574732 R	169.00
	F 32 S (PR-2B)**	Z8	574734 R	169.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)**	Z8	574798 R	163.00
Fränkische alpex F50 PROFI	F 16*		570717	190.00
	F 20*		570727	190.00
	F 26*		570730	205.00
	F 32		570735	205.00
	F 16 S (PR-2B)**	Z8	574728 R	156.00
	F 20 S (PR-2B)**	Z8	574730 R	156.00
	F 26 S (PR-2B)**	Z8	574732 R	169.00
	F 32 S (PR-2B)**	Z8	574734 R	169.00
	H 16*		570320	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)**	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
(DN 26)	U 25*		570780	187.00
	U 32		570785	218.00
	VP 16*		570910	198.00
	VP 20*		570915	198.00
	VP 32		570925	219.00

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC, see page 230.

4) Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 238.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

8) For making press joints for operating pressure ≤ PN 10.

9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

11) Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

12) Previous designation: C 26 pressing tongs

13) Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used. The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
Fränkische	Fz 40		570742	219.00
alpex L	Fz 50		570747	332.00
	F 63 (PZ-S)		572385	690.00
	Fz 75 (PR-3B)	Z4	572830 R	670.00
	G			
gabotherm H+S	TH 10*		570467	199.00
	TH 12*		570452	199.00
	TH 14*		570455	199.00
	TH 15*		570457	199.00
	TH 16*		570460	199.00
	TH 17*		570462	199.00
	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 10 S (PR-2B)**	Z8	574772 R	163.00
	TH 12 S (PR-2B)**	Z8	574776 R	163.00
	TH 14 S (PR-2B)**	Z8	574778 R	163.00
	TH 15 S (PR-2B)**	Z8	574780 R	163.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 17 S (PR-2B)**	Z8	574784 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
Gallagher USA	H 12* (¼")		570300	179.00
YogaPipe ACR	U 14* (⅜")		570760	187.00
	U 16* (½")		570765	187.00
	U 18* (⅝")		570770	187.00
	U 20* (¾")		570775	187.00
	U 25* (⅞")		570780	187.00
	U 32 (1⅛")		570785	218.00
Geberit FlowFit	GFFb 16 – 40*		571480 R	360.00
	GFFo 50 – 75		571485 R	570.00
Geberit Mapress	M 15		570110	165.00
CuNiFe	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 35 (PR-3S)	Z2	572727 R	720.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
Geberit Mapress	M 12		570100	165.00
C-STAHL	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 35 (PR-3S)	Z2	572727 R	720.00
	M 42 (PZ-4G)		570160	540.00
	M 54 (PZ-4G)		570170	540.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 66,7 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579107 R	1,250.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 12 S (PR-2B)	Z8	574736 R	136.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
Geberit Mapress	M 22		570130	165.00
C-STAHL	M 28		570140	165.00
Sprinkler nass	M 35 (PR-3S)	Z2	572727 R	720.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 66,7 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579107 R	1,250.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
Geberit Mapress	M 12		570100	165.00
Edelstahl	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 35 (PR-3S)	Z2	572727 R	720.00
	M 42 (PZ-4G)		570160	540.00
	M 54 (PZ-4G)		570170	540.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 12 S (PR-2B)	Z8	574736 R	136.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
Geberit Mapress	M 15		570110	165.00
Edelstahl Gas	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 35 (PR-3S)	Z2	572727 R	720.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)[7]	Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)[7]	Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
Geberit Mapress	M 22		570130	165.00
Edelstahl Sprinkler	M 28		570140	165.00
	M 35 (PR-3S)	Z2	572727 R	720.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 66,7 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579107 R	1,250.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
Geberit Mapress	M 12		570100	165.00
Kupfer	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 35 (PR-3S)	Z2	572727 R	720.00
	M 42 (PZ-4G)		570160	540.00
	M 54 (PZ-4G)		570170	540.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 66,7 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579107 R	1,250.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 12 S (PR-2B)	Z8	574736 R	136.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
Geberit Mapress	M 15		570110	165.00
Kupfer Gas	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 35 (PR-3S)	Z2	572727 R	720.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
Geberit Mapress	M 15		570110	165.00
Therm	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 35 (PR-3S)	Z2	572727 R	720.00
	M 42 (PZ-4G)		570160	540.00
	M 54 (PZ-4G)		570170	540.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
Geberit Mepla	G 16*		570400	199.00
	G 20*		570410	199.00
	G 26*		570420	212.00
	G 32		570430	225.00
	G 40		570440	292.00
	G 50		570450	306.00
	G 63 (PZ-S)		572470	870.00
Geberit Mepla Therm	G 16*		570400	199.00
	G 20*		570410	199.00
	G 26*		570420	212.00
Geberit Volex	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
General Fittings 5T00	H 16*		570320	179.00
	H 20*		570350	179.00
	H 25*		570360	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	H 40 (PZ-4G)		570390	610.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)**	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 63 (PZ-S)		572365	690.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
General Fittings Ewoprex	H 16*		570320	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)**	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 63 (PZ-S)		572365	690.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 32 S (PR-2B)	Z8	574868 R	179.00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
General Fittings Serie 5S00	B 16*		570850	217.00
	B 18*		570855	217.00
	B 20*		570860	217.00
	B 26		570870	240.00
	B 32		570880	240.00
	F 16*		570717	190.00
	F 20*		570727	190.00
	F 26*		570730	205.00
	F 32		570735	205.00
	F 16 S (PR-2B)**	Z8	574728 R	156.00
	F 20 S (PR-2B)**	Z8	574730 R	156.00
	F 26 S (PR-2B)**	Z8	574732 R	169.00
	F 32 S (PR-2B)**	Z8	574734 R	169.00
	H 16*		570320	179.00
	H 18*		570340	179.00
	H 20*		570350	179.00
	H 25*		570360	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	H 40 (PZ-4G)		570390	610.00
	TH 16*		570460	199.00
	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)**	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 18*		570770	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 63 (PZ-S)		572365	690.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 18 S (PR-2B)**	Z8	574870 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
General Fittings Trident	H 16*		570320	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)**	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 32		570785	218.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 32 S (PR-2B)	Z8	574868 R	179.00

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC, see page 230.

4) Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 238.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

8) For making press joints for operating pressure ≤ PN 10.

9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

11) Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

12) Previous designation: C 26 pressing tongs

13) Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used. The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
General Fittings Trident Gas	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	H 16*		570320	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 32		570785	218.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
Giacomini Raccordi RM Giacomini	H 16*		570320	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
Giacomini RM MULTIGAS	H 16*		570320	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 32		570785	218.00
Giacomini Valvole Giacomini serie R850V	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 54		570175	395.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	SA 15		570935	198.00
	SA 18		570940	198.00
	SA 22		570945	198.00
	SA 28		570950	198.00
	SA 35		570955	198.00
	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
Golan Pipe Systems (Scandinavia) Alu-Pres	U 16*		570765	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PZ-S)		572365	690.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 75 (PR-3B)	Z4	572828 R	710.00
Grinnell G-PRESS Copper Fittings	VUS ½" (OD 15,9 mm)		571770	199.00
	VUS ¾" (OD 22,2 mm)		571775	199.00
	VUS 1" (OD 28,6 mm)		571780	199.00
	VUS 1¼" (OD 34,9 mm)		571785	199.00
	VUS 1½" (OD 41,3 mm)		571790	385.00
	VUS 2" (OD 54,0 mm)		571795	395.00
	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819 R	670.00
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	670.00
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	710.00
GS Wärmesysteme System TH	TH 14*		570455	199.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 14 S (PR-2B)**	Z8	574778 R	163.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
GS Wärmesysteme System V	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
	H			
HASTINIK Hastinik/Hitpress	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PZ-4G)		570160	540.00
	M 54 (PZ-4G)		570170	540.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
heima24	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 32		570785	218.00
HELIROMA Klimapress	U 16*		570765	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 63 (PZ-S)		572365	690.00
	U 75 (PR-3B)	Z4	572828 R	710.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 32 S (PR-2B)**	Z8	574868 R	179.00
HELIROMA Klimapress PPSU LP	RFz 16*		571325	208.00
	RFz 20*		571330	208.00
	RFz 25		571335	208.00
	RFz 32		571340	208.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 26[12]		570750	218.00
	U 32		570785	218.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 26 S (PR-2B)**	Z8	574866 R	179.00
	U 32 S (PR-2B)**	Z8	574868 R	179.00
Henco	TH 14*		570455	199.00
	TH 16*		570460	199.00
	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	HE 32		571900	238.00
	HEz 40		571904	345.00
	TH 14 S (PR-2B)**	Z8	574778 R	163.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
Herotec tempusPRESS PLUS	H 16*		570320	179.00
	H 20*		570350	179.00
	H 25*		570360	179.00
	H 32		570380	179.00
	H 40 (PZ-4G)		570390	610.00
	RFz 16*		571325	208.00
	RFz 20*		571330	208.00
	RFz 25		571335	208.00
	RFz 32		571340	208.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PZ-S)		572365	690.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 75 (PR-3B)	Z4	572828 R	710.00

All prices excl. VAT

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
Herotec tempusPRESS PLUS PPSU	H 16*		570320	179.00
	H 20*		570350	179.00
	H 25*		570360	179.00
	H 32		570380	179.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PZ-S)		572365	690.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 75 (PR-3B)	Z4	572828 R	710.00
HERZ PIPEFIX	TH 10*		570467	199.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	THz 75 (PR-3B)	Z4	572829 R	670.00
	TH 10 S (PR-2B)**	Z8	574772 R	163.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)**	Z8	574798 R	163.00
HIDRONIX MULTIGAS	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
HIDRONIX MULTIPIPE	TH 14*		570455	199.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	H 14*		570310	179.00
	H 16*		570320	179.00
	H 18*		570340	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	U 14*		570760	187.00
	U 16*		570765	187.00
	U 18*		570770	187.00
	U 20*		570775	187.00
	U 26* [12]		570750	218.00
	U 32		570785	218.00
HIDRONIX UNICO	TH 14*		570455	199.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	H 14*		570310	179.00
	H 16*		570320	179.00
	H 18*		570340	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	U 14*		570760	187.00
	U 16*		570765	187.00
	U 18*		570770	187.00
	U 20*		570775	187.00
	U 26* [12]		570750	218.00
	U 32		570785	218.00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
HITEC Sistema Multistrato	TH 14*		570455	199.00
	TH 16*		570460	199.00
	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 14 S (PR-2B)**	Z8	574778 R	163.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)**	Z8	574798 R	163.00
HITHERM-ISOTUBI NUMEPRESS	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
HITHERM HTpress	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
HITHERM HTfire	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
HITHERM HTair	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

[1] Only pressing tongs from designation “108” (1st quarter of 2008), “208” (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

[2] For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

[3] Driven by REMS Power-Press XL ACC, see page 230.

[4] Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 238.

[5] For taking suitable pressing inserts.

[6] Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

[7] Use pressing rings labelled “M 88.9 G” or “M 108 G” on the three pressing segments for gas installations.

[8] For making press joints for operating pressure ≤ PN 10.

[9] For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

[10] For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

[11] Only use pressing tongs identified by “VMP ½” G” on the pressing jaws for gas installations.

[12] Previous designation: C 26 pressing tongs

[13] Only pressing tongs/S pressing rings (PR-2B) from designation “125” (1st quarter of 2025), “225” (2nd quarter of 2025) etc. can be used. The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
Hopewell press fit system	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PZ-4G)		570160	540.00
	M 54 (PZ-4G)		570170	540.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
hp praski BAVARIA-press	TH 10*		570467	199.00
	TH 12*		570452	199.00
	TH 14*		570455	199.00
	TH 16*		570460	199.00
	TH 17*		570462	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 10 S (PR-2B)**	Z8	574772 R	163.00
	TH 12 S (PR-2B)**	Z8	574776 R	163.00
	TH 14 S (PR-2B)**	Z8	574778 R	163.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 17 S (PR-2B)**	Z8	574784 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
I				
ICOOL PACIFIC COOL PRESS	BMP ¼"		571700 R	197.00
	BMP ⅜"		571702 R	197.00
	BMP ½"		571704 R	197.00
	BMP ⅝"		571706 R	197.00
	BMP ¾"		571708 R	197.00
	BMP 1⅛"		571714 R	197.00
	BMP ¼" S (PR-2B)	Z8	574810 R	162.00
	BMP ⅜" S (PR-2B)	Z8	574812 R	162.00
	BMP ½" S (PR-2B)	Z8	574814 R	162.00
	BMP ⅝" S (PR-2B)	Z8	574816 R	162.00
	BMP ¾" S (PR-2B)	Z8	574818 R	162.00
	BMP 1⅛" S (PR-2B)	Z8	574824 R	162.00
Idrosanitaria Bonomi Homegas	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
Idrosanitaria Bonomi Idropress	TH 16*		570460	199.00
	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
IDROSISTEMI Ta-Press	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	F 16*		570717	190.00
	F 20*		570727	190.00
	F 26*		570730	205.00
	F 32		570735	205.00
	Fz 40		570742	219.00
	Fz 50		570747	332.00
	F 63 (PZ-S)		572385	690.00
	F 16 S (PR-2B)**	Z8	574728 R	156.00
	F 20 S (PR-2B)**	Z8	574730 R	156.00
	F 26 S (PR-2B)**	Z8	574732 R	169.00
	F 32 S (PR-2B)	Z8	574734 R	169.00
	H 16*		570320	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	H 40 (PZ-4G)		570390	610.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 26* [12]		570750	218.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PZ-S)		572365	690.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 26 S (PR-2B)**	Z8	574866 R	179.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
	B 16*		570850	217.00
	B 20*		570860	217.00
	B 26		570870	240.00
	B 32		570880	240.00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
IDROTRADE Storm Multipinza	H 16*		570320	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	THL 32		570487	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
IDROTRADE StormPRES[1]	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)[8]	Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)[8]	Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)[8]	Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
IDROTRADE StormSTEEL[1]	M 12		570100	165.00
	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)[8]	Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)[8]	Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)[8]	Z7 XL 45 kN[4]	579111 R	1,460.00
	M 12 S (PR-2B)	Z8	574736 R	136.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
Instantor Press System	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
Instantor Copper Press Imperial	VI ½" S (PR-2B)	Z8	574850 R	162.00
	VI ¾" S (PR-2B)	Z8	574852 R	162.00
	VI 1" S (PR-2B)	Z8	574854 R	162.00
Instantor Copper Press Metric	M 15		570110	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
INVENA Prov	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	B 16*		570850	217.00
	B 20*		570860	217.00
INVENA Prov LBP	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 26* [12]		570750	218.00
	U 32		570785	218.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 26 S (PR-2B)**	Z8	574866 R	179.00
	U 32 S (PR-2B)	Z8	574868 R	179.00

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
IPA IPANA Press	TH 10*		570467	199.00
	TH 11,6*		570482	199.00
	TH 12*		570452	199.00
	TH 14*		570455	199.00
	TH 15*		570457	199.00
	TH 16*		570460	199.00
	TH 17*		570462	199.00
	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 22*		570472	199.00
	TH 25*		570495	199.00
	TH 26*		570475	199.00
	TH 28		570477	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	THz 75 (PR-3B)	Z4	572829 R	670.00
	TH 10 S (PR-2B)**	Z8	574772 R	163.00
	TH 11,6 S (PR-2B)**	Z8	574774 R	163.00
	TH 12 S (PR-2B)**	Z8	574776 R	163.00
	TH 14 S (PR-2B)**	Z8	574778 R	163.00
	TH 15 S (PR-2B)**	Z8	574780 R	163.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 17 S (PR-2B)**	Z8	574784 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 22 S (PR-2B)**	Z8	574790 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 28 S (PR-2B)**	Z8	574796 R	163.00
	TH 32 S (PR-2B)**	Z8	574798 R	163.00
IPA THu IPANA Press	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
IPALPEX (Industrie du Plastique et Accessoires)	TH 14*		570455	199.00
	TH 16*		570460	199.00
	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	THL 32		570487	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
IPLEX PIPELINES AUSTRALIA Iplex Pro-fit	K16/P18*		572600	208.00
	PF 22*		571980	221.00
IPLEX PIPELINES AUSTRALIA Iplex K1 (Gas)	K16/P18*		572600	208.00
	K/20*		572605	208.00
	K/25*		572610	208.00
	K32		572615	208.00
	K1/40		572620	208.00
	K1/50		572625	340.00
IPLEX PIPELINES AUSTRALIA Iplex K2	K16/P18*		572600	208.00
	K/20*		572605	208.00
	K/25*		572610	208.00
ISOLTUBEX ISOLPEX IPERT	RFz 16*		571325	208.00
	RFz 20*		571330	208.00
	RFlz 25		571337	229.00
	RFlz 32		571342	229.00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
ISOLTUBEX Multicapa	RFz 16*		571325	208.00
	RFz 18*		571327	208.00
	RFz 20*		571330	208.00
	RFlz 25		571337	229.00
	RFlz 32		571342	229.00
	U 16*		570765	187.00
	U 18*		570770	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 63 (PZ-S)		572365	690.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 18 S (PR-2B)**	Z8	574870 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
ISOLTUBEX Multicapa GAS	RFz 16*		571325	208.00
	RFz 20*		571330	208.00
	RFlz 25		571337	229.00
	RFlz 32		571342	229.00
ISOLTUBEX Multicapa-PPSU	U 16*		570765	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
ISOTUBI NUMEPRESS	M 15		570110	165.00
	M 18[1]		570120	165.00
	M 22		570130	165.00
	M 28[1]		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
IVAR ALPEX-GAS	B 20		570860	217.00
	B 26		570870	240.00
	B 32		570880	240.00
IVAR Ivar-Press	B 14*		570845	217.00
	B 16*		570850	217.00
	B 18*		570855	217.00
	B 20*		570860	217.00
	B 26		570870	240.00
	B 32		570880	240.00
	Fz 40		570742	219.00
	Fz 50		570747	332.00
	F 63 (PZ-S)		572385	690.00
IVAR MULTI PRESS GAS ITALIA	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	H 16*		570320	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	U 16*		570765	187.00
	U 20*		570775	187.00

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC, see page 230.

4) Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 238.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

8) For making press joints for operating pressure ≤ PN 10.

9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

11) Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

12) Previous designation: C 26 pressing tongs

13) Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used. The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
IVAR Multi Press MP	TH 16*		570460	199.00
	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	F 16*		570717	190.00
	F 18*		570720	190.00
	F 20*		570727	190.00
	F 26*		570730	205.00
	F 32		570735	205.00
	Fz 40		570742	219.00
	Fz 50		570747	332.00
	F 63 (PZ-S)		572385	690.00
	F 16 S (PR-2B)**	Z8	574728 R	156.00
	F 20 S (PR-2B)**	Z8	574730 R	156.00
	F 26 S (PR-2B)**	Z8	574732 R	169.00
	F 32 S (PR-2B)	Z8	574734 R	169.00
	H 16*		570320	179.00
	H 18*		570340	179.00
	H 20*		570350	179.00
	H 25*		570360	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	H 40 (PZ-4G)		570390	610.00
	U 16*		570765	187.00
	U 18*		570770	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 26* [12]		570750	218.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PZ-S)		572365	690.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 18 S (PR-2B)**	Z8	574870 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 26 S (PR-2B)**	Z8	574866 R	179.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
	B 16*		570850	217.00
	B 18*		570855	217.00
	B 20*		570860	217.00
	B 26		570870	240.00
	B 32		570880	240.00
IVAR Multi Press Leak (MPL)	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	F 16*		570717	190.00
	F 20*		570727	190.00
	F 26*		570730	205.00
	F 32		570735	205.00
	F 16 S (PR-2B)**	Z8	574728 R	156.00
	F 20 S (PR-2B)**	Z8	574730 R	156.00
	F 26 S (PR-2B)**	Z8	574732 R	169.00
	F 32 S (PR-2B)	Z8	574734 R	169.00
	H 16*		570320	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 26* [12]		570750	218.00
	U 32		570785	218.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 26 S (PR-2B)**	Z8	574866 R	179.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
	B 16*		570850	217.00
	B 20*		570860	217.00
	B 26		570870	240.00
	B 32		570880	240.00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
IVAR Plastic Multi Press Leak (PMPL)	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	F 16*		570717	190.00
	F 20*		570727	190.00
	F 26*		570730	205.00
	F 32		570735	205.00
	F 16 S (PR-2B)**	Z8	574728 R	156.00
	F 20 S (PR-2B)**	Z8	574730 R	156.00
	F 26 S (PR-2B)**	Z8	574732 R	169.00
	F 32 S (PR-2B)	Z8	574734 R	169.00
	H 16*		570320	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 26* [12]		570750	218.00
	U 32		570785	218.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 26 S (PR-2B)**	Z8	574866 R	179.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
	B 16*		570850	217.00
	B 20*		570860	217.00
	B 26		570870	240.00
	B 32		570880	240.00
IVAR Plastic Multi Press PMP	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	F 16*		570717	190.00
	F 20*		570727	190.00
	F 26*		570730	205.00
	F 32		570735	205.00
	F 16 S (PR-2B)**	Z8	574728 R	156.00
	F 20 S (PR-2B)**	Z8	574730 R	156.00
	F 26 S (PR-2B)**	Z8	574732 R	169.00
	F 32 S (PR-2B)	Z8	574734 R	169.00
	H 16*		570320	179.00
	H 20*		570350	179.00
	H 25*		570360	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 26* [12]		570750	218.00
	U 32		570785	218.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 26 S (PR-2B)**	Z8	574866 R	179.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
	B 16*		570850	217.00
	B 20*		570860	217.00
	B 26		570870	240.00
	B 32		570880	240.00
IVT Edelstahl-Presssystem	M 15		570110	165.00
	M 18 [1]		570120	165.00
	M 22		570130	165.00
	M 28 [1]		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL [3] / Z7 XL 45 kN [4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL [3] / Z7 XL 45 kN [4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL [3] / Z7 XL 45 kN [4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
IVT PRIPRESS	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00

All prices excl. VAT

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
	J			
Jäger - Aquatec Aquapress H	H 14*		570310	179.00
	H 16*		570320	179.00
	H 17*		570330	179.00
	H 18*		570340	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PZ-S)		572365	690.00
Jäger - Aquatec C-Stahl - Press Typ M	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
Jäger - Aquatec Edelstahl - Press Typ M	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
Jäger - Aquatec Kupfer - Press Typ V	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54		570175	395.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
Jansen AG JANSEN COMISA	TH 14*		570455	199.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 14 S (PR-2B)**	Z8	574778 R	163.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
Jaraflex-Presssystem	TH 14*		570455	199.00
	TH 16*		570460	199.00
	TH 17*		570462	199.00
	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 14 S (PR-2B)**	Z8	574778 R	163.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 17 S (PR-2B)**	Z8	574784 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
JUNGWOO JWPress	VUS ½" (OD 15,9 mm)		571770	199.00
	VUS ¾" (OD 22,2 mm)		571775	199.00
	VUS 1" (OD 28,6 mm)		571780	199.00
	VUS 1¼" (OD 34,9 mm)		571785	199.00
	VUS 1½" (OD 41,3 mm)		571790	385.00
	VUS 2" (OD 54,0 mm)		571795	395.00
	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819 R	670.00
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	670.00
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	710.00
	K			
KAN KAN-therm Press LBP	U 14*		570760	187.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 26*[12]		570750	218.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 14 S (PR-2B)**	Z8	574858 R	153.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 26 S (PR-2B)**	Z8	574866 R	179.00
	U 32 S (PR-2B)**	Z8	574868 R	179.00
	TH 14*		570455	199.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 14 S (PR-2B)**	Z8	574778 R	163.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)**	Z8	574798 R	163.00
KAN KAN-therm Inox	M 15		570110	165.00
	M 18[1]		570120	165.00
	M 22		570130	165.00
	M 28[1]		570140	165.00
	M 35		570150	165.00
	M 42 (PZ-4G)		570160	540.00
	M 54 (PZ-4G)		570170	540.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC, see page 230.

4) Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 238.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

8) For making press joints for operating pressure ≤ PN 10.

9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

11) Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

12) Previous designation: C 26 pressing tongs

13) Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used. The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
KAN	M 12		570100	165.00
KAN-therm Steel	M 15		570110	165.00
	M 18[1]		570120	165.00
	M 22		570130	165.00
	M 28[1]		570140	165.00
	M 35		570150	165.00
	M 42 (PZ-4G)		570160	540.00
	M 54 (PZ-4G)		570170	540.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	XP 66,7 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579108 R	1,250.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 12 S (PR-2B)	Z8	574736 R	136.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
KAN	U 14*		570760	187.00
KAN-therm	U 16*		570765	187.00
UltraPRESS	U 20*		570775	187.00
	U 25*		570780	187.00
	U 26* [12]		570750	218.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 14 S (PR-2B)**	Z8	574858 R	153.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 26 S (PR-2B)**	Z8	574866 R	179.00
	U 32 S (PR-2B)**	Z8	574868 R	179.00
	TH 14*		570455	199.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 14 S (PR-2B)**	Z8	574778 R	163.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)**	Z8	574798 R	163.00
KE KELIT	M 15		570110	165.00
COPPERFIX	M 18		570120	165.00
Kupfer	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
KE KELIT	U 16*		570765	187.00
KELIT KELOX	U 18*		570770	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PZ-S)		572365	690.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 75 (PR-3B)	Z4	572828 R	710.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 18 S (PR-2B)**	Z8	574870 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
KE KELIT	U 16*		570765	187.00
KELOX-PPSU-W	U 18*		570770	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PZ-S)		572365	690.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 75 (PR-3B)	Z4	572828 R	710.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 18 S (PR-2B)**	Z8	574870 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
KE KELIT	U 16*		570765	187.00
KELOX-ULTRAX	U 18*		570770	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PZ-S)		572365	690.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 75 (PR-3B)	Z4	572828 R	710.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 18 S (PR-2B)**	Z8	574870 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
KE KELIT	U 16*		570765	187.00
KELOX-ULTRAX-W	U 18*		570770	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PZ-S)		572365	690.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 75 (PR-3B)	Z4	572828 R	710.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 18 S (PR-2B)**	Z8	574870 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
KE KELIT	U 16*		570765	187.00
KELOX-WINDOX-U	U 18*		570770	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PZ-S)		572365	690.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 75 (PR-3B)	Z4	572828 R	710.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 18 S (PR-2B)**	Z8	574870 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
KE KELIT	M 15		570110	165.00
steelFIX	M 18		570120	165.00
C-Stahl	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
KE KELIT	M 15		570110	165.00
steelFIX	M 18		570120	165.00
Edelstahl	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
KEMBLA	VAU 15 (OD 12,7 mm)		572687	170.00
KemPress	VAU 20 (OD 19,1 mm)		572689	170.00
(AUS)	VAU 25 (OD 25,4 mm)		572691	170.00
	VAU 32 (OD 31,8 mm)		572693	180.00
	VAU 40 (OD 38,1 mm)		572695	266.00
	VAU 50 (OD 50,8 mm)		572697	471.00
KEMBLA	VAU 15 (OD 12,7 mm)		572687	170.00
KemPress Gas	VAU 20 (OD 19,1 mm)		572689	170.00
(AUS)	VAU 25 (OD 25,4 mm)		572691	170.00
	VAU 32 (OD 31,8 mm)		572693	180.00
	VAU 40 (OD 38,1 mm)		572695	266.00
	VAU 50 (OD 50,8 mm)		572697	471.00
KISAN	KI 16*		571360	211.00
Kisan KD	KI 20*		571370	211.00
	KI 25*		571375	211.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00

All prices excl. VAT

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
KISAN	KI 16*		571360	211.00
Kisan WL/WP	KI 20*		571370	211.00
	KI 25*		571375	211.00
	KI 32		571380	284.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
KISAN	TH 20*		570470	199.00
Kisan WR	TH 25*		570495	199.00
	TH 32		570480	199.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PZ-S)		572365	690.00
	U 75 (PR-3B)		572828 R	710.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
KISAN	M 15		570110	165.00
Kistal C	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
KISAN	M 15		570110	165.00
Kistal Inox	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
L				
LEGEND-PRESS	VUS ½" (OD 15,9 mm)		571770	199.00
press fitting	VUS ¾" (OD 22,2 mm)		571775	199.00
system	VUS 1" (OD 28,6 mm)		571780	199.00
	VUS 1¼" (OD 34,9 mm)		571785	199.00
	VUS 1½" (OD 41,3 mm)		571790	385.00
	VUS 2" (OD 54,0 mm)		571795	395.00
	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819 R	670.00
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	670.00
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	710.00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
LK Systems	V 12		570107	165.00
LK >B<Press	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 54		570175	395.00
	V 12 S (PR-2B)	Z8	574748 R	136.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
LK Systems	V 12		570107	165.00
LK >B<Press	V 15		570115	165.00
Elförzinkat	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 54		570175	395.00
	V 12 S (PR-2B)	Z8	574748 R	136.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
LK Systems	V 15		570115	165.00
LK >B<Press	V 18		570125	165.00
Gas	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 54		570175	395.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
LK Systems	TH 16*		570460	199.00
LK Universal	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
M				
MAINCOR	U 16*		570765	187.00
MAINPRESS	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PZ-S)		572365	690.00
	U 63 (PR-3B)	Z4	572837 R	800.00
MAINCOR	U 16*		570765	187.00
MAINFLOR	U 20*		570775	187.00
Mair Heiztechnik	H 11,5*		570315	179.00
M-Press	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC, see page 230.

4) Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 238.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

8) For making press joints for operating pressure ≤ PN 10.

9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

11) Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

12) Previous designation: C 26 pressing tongs

13) Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used. The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
Ma.s.ter System PRESSMASTER	TH 14*		570455	199.00
	TH 16*		570460	199.00
	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 14 S (PR-2B)**	Z8	574778 R	163.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	H 14*		570310	179.00
	H 16*		570320	179.00
	H 18*		570340	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	H 40 (PZ-4G)		570390	610.00
	U 14*		570760	187.00
	U 16*		570765	187.00
	U 18*		570770	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 63 (PZ-S)		572365	690.00
Meier Tobler metalplast - Stramax Serie XPRT	H 16*		570320	179.00
	H 20*		570350	179.00
	H 25*		570360	179.00
	H 32		570380	179.00
	RFz 16*		571325	208.00
	RFz 20*		571330	208.00
	RFz 25		571335	208.00
	RFz 32		571340	208.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PZ-S)		572365	690.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
METALGRUP Permatubo	U 16*		570765	187.00
	U 18*		570770	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 63 (PZ-S)		572365	690.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 18 S (PR-2B)**	Z8	574870 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
METALGRUP PexGrup	RFz 16*		571325	208.00
	RFz 20*		571330	208.00
	RFz 25		571335	208.00
	RFz 32		571340	208.00
METALGRUP MultiGrup	U 16*		570765	187.00
	U 18*		570770	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 18 S (PR-2B)**	Z8	574870 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 32 S (PR-2B)**	Z8	574868 R	179.00
M-Press Fittings Ltd M-Press Carbon Steel	M 15		570110	165.00
	M 22		570130	165.00
	M 28[1]		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	XP 66,7 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579108 R	1,250.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
M-Press Fittings Ltd M-Press Copper	M 15		570110	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 66,7 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579107 R	1,250.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
M-Press Fittings Ltd M-Press Stainless Steel	M 15		570110	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	XP 66,7 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579108 R	1,250.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
Mueller Streamline PRS Copper Press	VUS ½" (OD 15,9 mm)		571770	199.00
	VUS ¾" (OD 22,2 mm)		571775	199.00
	VUS 1" (OD 28,6 mm)		571780	199.00
	VUS 1¼" (OD 34,9 mm)		571785	199.00
	VUS 1½" (OD 41,3 mm)		571790	385.00
	VUS 2" (OD 54,0 mm)		571795	395.00
	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819 R	670.00
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	670.00
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	710.00
MULTITHERM PRESSSYSTEM	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	THz 75 (PR-3B)	Z4	572829 R	670.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
Multicapas Industrial AIS PEX	RFz 16*		571325	208.00
	RFz 20*		571330	208.00
	RFz 25		571335	208.00
	RFz 32		571340	208.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 32 S (PR-2B)**	Z8	574868 R	179.00
Multicapas Industrial AIS PPSU	H 16*		570320	179.00
	H 20*		570350	179.00
	H 25*		570360	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	RFz 16*		571325	208.00
	RFz 20*		571330	208.00
	RFz 25		571335	208.00
	RFz 32		571340	208.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 26*[12]		570750	218.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PZ-S)		572365	690.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 26 S (PR-2B)**	Z8	574866 R	179.00
	U 32 S (PR-2B)	Z8	574868 R	179.00

All prices excl. VAT

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
Multicapas Industrial	H 16*		570320	179.00
AIS XPRT	H 20*		570350	179.00
	H 25*		570360	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	RFz 16*		571325	208.00
	RFz 20*		571330	208.00
	RFz 25		571335	208.00
	RFz 32		571340	208.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	THz 75 (PR-3B)	Z4	572829 R	670.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)**	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 26* [12]		570750	218.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PZ-S)		572365	690.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 75 (PR-3B)	Z4	572828 R	710.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 26 S (PR-2B)**	Z8	574866 R	179.00
	U 32 S (PR-2B)**	Z8	574868 R	179.00
Multicapas Industrial	U 16*		570765	187.00
multitubo systems MC	U 18*		570770	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PZ-S)		572365	690.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 75 (PR-3B)	Z4	572828 R	710.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 18 S (PR-2B)**	Z8	574870 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
Multicapas Industrial	H 16*		570320	179.00
multitubo systems MM	H 20*		570350	179.00
	H 25*		570360	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	RFz 16*		571325	208.00
	RFz 20*		571330	208.00
	RFz 25		571335	208.00
	RFz 32		571340	208.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	THz 75 (PR-3B)	Z4	572829 R	670.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 26* [12]		570750	218.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PZ-S)		572365	690.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 75 (PR-3B)	Z4	572828 R	710.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 26 S (PR-2B)**	Z8	574866 R	179.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
multipipe Deutschland	TH 16*		570460	199.00
multipipe mp	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00

N

NEUTHERM	H 16*		570320	179.00
MEKUPRESS-HT	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	H 40 (PZ-4G)		570390	610.00
	U 40		570790	266.00
NIBCO	VUS ½" (OD 15,9 mm)		571770	199.00
Press System	VUS ¾" (OD 22,2 mm)		571775	199.00
Copper	VUS 1" (OD 28,6 mm)		571780	199.00
	VUS 1¼" (OD 34,9 mm)		571785	199.00
	VUS 1½" (OD 41,3 mm)		571790	385.00
	VUS 2" (OD 54,0 mm)		571795	395.00
NICOLL FLUXO	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	THz 75 (PR-3B)	Z4	572829 R	670.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC, see page 230.

4) Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 238.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

8) For making press joints for operating pressure ≤ PN 10.

9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

11) Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

12) Previous designation: C 26 pressing tongs

13) Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used. The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
NUPI Industrie	B 16*		570850	217.00
Italiane	B 18*		570855	217.00
Multinupi	B 20*		570860	217.00
	B 26		570870	240.00
	B 32		570880	240.00
	F 16*		570717	190.00
	F 18*		570720	190.00
	F 20*		570727	190.00
	F 26*		570730	205.00
	F 32		570735	205.00
	F 16 S (PR-2B)**	Z8	574728 R	156.00
	F 20 S (PR-2B)**	Z8	574730 R	156.00
	F 26 S (PR-2B)**	Z8	574732 R	169.00
	F 32 S (PR-2B)	Z8	574734 R	169.00
	H 16*		570320	179.00
	H 18*		570340	179.00
	H 20*		570350	179.00
	H 25*		570360	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	TH 16*		570460	199.00
	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 14*		570760	187.00
	U 16*		570765	187.00
	U 18*		570770	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 26* [12]		570750	218.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 63 (PZ-S)		572365	690.00
	U 14 S (PR-2B)**	Z8	574858 R	153.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 18 S (PR-2B)**	Z8	574870 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 26 S (PR-2B)**	Z8	574866 R	179.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
Nussbaum	VMP ⅜" (OD 17,2 mm)		571740	229.00
Optifitt-Press	VMP ½" G (OD 21,3 mm)		571766 R	229.00
	VMPz ¾" (OD 26,9 mm)		571764	229.00
	VMPz 1" (OD 33,7 mm)		571767	229.00
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	760.00
	VMPz 1½" (PR-3B) (OD 48,3 mm)	Z5	572844 R	530.00
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845 R	530.00
Nussbaum	VRX 16		571750	209.00
Optiflex-Flowpress	VRX 20		571752	209.00
	VRX 25		571754	229.00
	VRX 32		571756	229.00
	VRX 40		571758	319.00
	VRX 50		571760	373.00
	VRX 63		571797	720.00
Nussbaum	V 15		570115	165.00
Optipress	V 18		570125	165.00
Aquaplus	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54		570175	395.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	VFz 64,0 (PR-3B)	Z5	572815 R	670.00
	VFz 76,1 (PR-3B)	Z5	572816 R	670.00
	VFz 88,9 (PR-3B)	Z5	572817 R	710.00
	VFz 108,0 (PR-3B)	Z5	572818 R	710.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
Nussbaum	V 15		570115	165.00
Optipress-Gaz	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54		570175	395.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	VFz 64,0 (PR-3B)	Z5	572815 R	670.00
	VFz 76,1 (PR-3B)	Z5	572816 R	670.00
	VFz 88,9 (PR-3B)	Z5	572817 R	710.00
	VFz 108,0 (PR-3B)	Z5	572818 R	710.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
Nussbaum	V 15		570115	165.00
Optipress-Therm	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54		570175	395.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	VFz 64,0 (PR-3B)	Z5	572815 R	670.00
	VFz 76,1 (PR-3B)	Z5	572816 R	670.00
	VFz 88,9 (PR-3B)	Z5	572817 R	710.00
	VFz 108,0 (PR-3B)	Z5	572818 R	710.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
O				
Oventrop	H 16 A*		570620	233.00
Cofit P	H 20 A*		570650	233.00
	H 26 A*		570670	233.00
	H 32 A		570680	233.00
	H 40 A		570690	399.00
	U 50		570795	320.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 63 (PZ-S)		572365	690.00
Oventrop	H 16 A*		570620	233.00
Cofit PD	H 20 A*		570650	233.00
	H 26 A*		570670	233.00
Oventrop	H 16 A*		570620	233.00
Cofit PDK	H 20 A*		570650	233.00
Oventrop	H 16 A*		570620	233.00
Cofit PD-HT	H 20 A*		570650	233.00
	H 25 A*		570660	233.00
	H 32 A		570680	233.00
Oventrop	H 16 A*		570620	233.00
Cofit PDK-HT	H 20 A*		570650	233.00
P				
PBTub	RFz 12*		571320	208.00
SERTIPRESS	RFz 16*		571325	208.00
	RFz 20*		571330	208.00
	RFz 25		571335	208.00
PBTub	M 15		570110	165.00
SERTI-STEEL	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
Pegler Yorkshire	> Aalberts integrated piping systems			
PERFEXIM	U 16*		570765	187.00
PERFEKT	U 20*		570775	187.00
SYSTEM	U 25*		570780	187.00
	U 32		570785	218.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
PERFEXIM	U 16*		570765	187.00
PERFEKT	U 20*		570775	187.00
SYSTEM PLUS	U 25*		570780	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PZ-S)		572365	690.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00

All prices excl. VAT

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
PERFILTUBO	U 16*		570765	187.00
PERFILALUPEX	U 18*		570770	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 63 (PZ-S)		572365	690.00
	U 75 (PR-3B)	Z4	572828 R	710.00
PERFILTUBO	M 15		570110	165.00
PERFILPRESS	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
PEXTUBE	RFz 16*		571325	208.00
PexTube	RFz 20*		571330	208.00
	RFlz 25		571337	229.00
	RFlz 32		571342	229.00
Pipelife	M 15		570110	165.00
C-PRESS	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
Pipelife	M 15		570110	165.00
Edelstahl	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
Pipelife	TH 16*		570460	199.00
RADOPRESS	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
Pipetec Connect	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 32		570785	218.00
PLASTICA ALFA	TH 16*		570460	199.00
Multypex	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
PLASTICA ALFA	TH 16*		570460	199.00
Multypex Air	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
PLASTICA ALFA	TH 16*		570460	199.00
Multypexalfa Gas	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
PLASTICA ALFA	TH 16*		570460	199.00
Multypexalfa Gas protek	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
PLASTICA ALFA	TH 16*		570460	199.00
Multypex Plus	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
PLASTICA ALFA	TH 16*		570460	199.00
Multypex Thermo	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
PLASTICA ALFA	TH 16*		570460	199.00
Multypex Thermo Plus	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC, see page 230.

4) Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 238.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

8) For making press joints for operating pressure ≤ PN 10.

9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

11) Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

12) Previous designation: C 26 pressing tongs

13) Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used. The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
PLÁSTICOS FERRO	U 16*		570765	187.00
FERROPLAST	U 20*		570775	187.00
GPF MULT Pressfitting	U 25*		570780	187.00
MULTICAPA	U 32		570785	218.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
PLÁSTICOS FERRO	U 16*		570765	187.00
FERROPLAST	U 20*		570775	187.00
GPF PPSU	U 25*		570780	187.00
Pressfitting PEX	U 32		570785	218.00
y MULTICAPA	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
PLÁSTICOS FERRO	RFz 16*		571325	208.00
FERROPLAST	RFz 20*		571330	208.00
GPF PRESS	RFz 25		571335	208.00
Pressfitting PEX	RFz 32		571340	208.00
PLUMBING PLUS	K16/P18*		572600	208.00
EZIPEX Crimp	K/20*		572605	208.00
(AUS)	K/25*		572610	208.00
	K32		572615	208.00
	K1/40		572620	208.00
	K1/50		572625	340.00
PLUMBING PLUS	K16/P18*		572600	208.00
EZIPEX Gas	K/20*		572605	208.00
(AUS)	K/25*		572610	208.00
	K32		572615	208.00
	K1/40		572620	208.00
	K1/50		572625	340.00
PLUMBING PLUS	VAU 15 (OD 12,7 mm)		572687	170.00
EZIPRESS Gas	VAU 20 (OD 19,1 mm)		572689	170.00
(AUS)	VAU 25 (OD 25,4 mm)		572691	170.00
	VAU 32 (OD 31,8 mm)		572693	180.00
	VAU 40 (OD 38,1 mm)		572695	266.00
	VAU 50 (OD 50,8 mm)		572697	471.00
	VAUFz 65 (PR-3B) (OD 63,5 mm)	Z5	572839 R	670.00
	VAUFz 80 (PR-3B) (OD 76,2 mm)	Z5	572840 R	670.00
	VAUFz 100 (PR-3B) (OD 101,6 mm)	Z5	572841 R	710.00
PLUMBING PLUS	VAU 15 (OD 12,7 mm)		572687	170.00
EZIPRESS Solar	VAU 20 (OD 19,1 mm)		572689	170.00
(AUS)	VAU 25 (OD 25,4 mm)		572691	170.00
	VAU 15 S (PR-2B) (OD 12,7 mm)	Z8	574804 R	140.00
	VAU 20 S (PR-2B)** (OD 19,1 mm)	Z8	574806 R	140.00
	VAU 25 S (PR-2B)** (OD 25,4 mm)	Z8	574808 R	140.00
PLUMBING PLUS	VAU 15 (OD 12,7 mm)		572687	170.00
EZIPRESS Water	VAU 20 (OD 19,1 mm)		572689	170.00
(AUS)	VAU 25 (OD 25,4 mm)		572691	170.00
	VAU 32 (OD 31,8 mm)		572693	180.00
	VAU 40 (OD 38,1 mm)		572695	266.00
	VAU 50 (OD 50,8 mm)		572697	471.00
	VAUFz 65 (PR-3B) (OD 63,5 mm)	Z5	572839 R	670.00
	VAUFz 80 (PR-3B) (OD 76,2 mm)	Z5	572840 R	670.00
	VAUFz 100 (PR-3B) (OD 101,6 mm)	Z5	572841 R	710.00
	VAU 15 S (PR-2B) (OD 12,7 mm)	Z8	574804 R	140.00
	VAU 20 S (PR-2B)** (OD 19,1 mm)	Z8	574806 R	140.00
	VAU 25 S (PR-2B)** (OD 25,4 mm)	Z8	574808 R	140.00
POLYPIPE	TH 10*		570467	199.00
POLYSURE	TH 15*		570457	199.00
	TH 22*		570472	199.00
	TH 28		570477	199.00
POLYSAN	M 15		570110	165.00
Handelsges.	M 18		570120	165.00
m.b.H. & Co KG	M 22		570130	165.00
(Krems/Öster-	M 28		570140	165.00
reich)	M 35		570150	165.00
POLYSAN-	M 42 (PR-3S)	Z2	572706 R	720.00
C-Stahl-Press-	M 54 (PR-3S)	Z2	572708 R	720.00
System M	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
POLYSAN	M 15		570110	165.00
Handelsges.	M 18		570120	165.00
m.b.H. & Co KG	M 22		570130	165.00
(Krems/Öster-	M 28		570140	165.00
reich)	M 35		570150	165.00
POLYSAN-	M 42 (PR-3S)	Z2	572706 R	720.00
Edelstahl	M 54 (PR-3S)	Z2	572708 R	720.00
Press-System 1.4520	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
POLYSAN	M 15		570110	165.00
Handelsges.	M 18		570120	165.00
m.b.H. & Co KG	M 22		570130	165.00
(Krems/Öster-	M 28		570140	165.00
reich)	M 35		570150	165.00
POLYSAN-	M 42 (PR-3S)	Z2	572706 R	720.00
Edelstahl	M 54 (PR-3S)	Z2	572708 R	720.00
Press-System Gas	M 76,1 XL (PR-3S)	Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)[7]	Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)[7]	Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
POLYSAN	M 15		570110	165.00
Handelsges.	M 18		570120	165.00
m.b.H. & Co KG	M 22		570130	165.00
(Krems/Öster-	M 28		570140	165.00
reich)	M 35		570150	165.00
POLYSAN-	M 42 (PR-3S)	Z2	572706 R	720.00
Edelstahl	M 54 (PR-3S)	Z2	572708 R	720.00
Press-System Wasser	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
POLYSAN	TH 14*		570455	199.00
Handelsges.	TH 16*		570460	199.00
m.b.H. & Co KG	TH 17*		570462	199.00
(Krems/Öster-	TH 18*		570465	199.00
reich)	TH 20*		570470	199.00
POLYSAN-	TH 26*		570475	199.00
Press-System	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	THz 75 (PR-3B)	Z4	572829 R	670.00
	TH 14 S (PR-2B)**	Z8	574778 R	163.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 17 S (PR-2B)**	Z8	574784 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)**	Z8	574798 R	163.00
POLYSAN	TH 14*		570455	199.00
Handelsges.	TH 16*		570460	199.00
m.b.H. & Co KG	TH 17*		570462	199.00
(Krems/Öster-	TH 18*		570465	199.00
reich)	TH 20*		570470	199.00
POLYSAN-Henco-	TH 26*		570475	199.00
Press-System	HE 32		571900	238.00
	HEz 40		571904	345.00
	TH 14 S (PR-2B)**	Z8	574778 R	163.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 17 S (PR-2B)**	Z8	574784 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
Prandelli	H 14*		570310	179.00
Multyrama Pf	H 16*		570320	179.00
	H 18*		570340	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PR-3B)	Z4	572837 R	800.00
Prandelli	H 16*		570320	179.00
Multyrama Pfm	H 18*		570340	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	TH 16*		570460	199.00
	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)**	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 18*		570770	187.00
	U 20*		570775	187.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PR-3B)	Z4	572837 R	800.00

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
PURMO	F 16*		570717	190.00
Cleverfit Radial	F 20*		570727	190.00
	F 26*		570730	205.00
	F 32		570735	205.00
	F 16 S (PR-2B)**	Z8	574728 R	156.00
	F 20 S (PR-2B)**	Z8	574730 R	156.00
	F 26 S (PR-2B)**	Z8	574732 R	169.00
	F 32 S (PR-2B)**	Z8	574734 R	169.00
	H 16*		570320	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	TH 14*		570455	199.00
	TH 16*		570460	199.00
	TH 17*		570462	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 14 S (PR-2B)**	Z8	574778 R	163.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 17 S (PR-2B)**	Z8	574784 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)**	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 32		570785	218.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
	VP 16*		570910	198.00
	VP 20*		570915	198.00
	VP 32		570925	219.00
R				
Raccorderie Metalliche aesPRES[1]	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
Raccorderie Metalliche inoxPRES[1]	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)[8]	Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)[8]	Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)[8]	Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
Raccorderie Metalliche MARINEPRES[1]	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)[8]	Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)[8]	Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)[8]	Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
Raccorderie Metalliche steelPRES[1]	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)[8]	Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)[8]	Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)[8]	Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
RBM Tita-fix	B 14*		570845	217.00
	B 16*		570850	217.00
	B 18*		570855	217.00
	B 20*		570860	217.00
	B 26		570870	240.00
	F 16*		570717	190.00
	F 18*		570720	190.00
	F 20*		570727	190.00
	F 16 S (PR-2B)**	Z8	574728 R	156.00
	F 20 S (PR-2B)**	Z8	574730 R	156.00
	H 14*		570310	179.00
	H 16*		570320	179.00
	H 18*		570340	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	TH 14*		570455	199.00
	TH 16*		570460	199.00
	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)**	Z8	574798 R	163.00
	U 14*		570760	187.00
	U 16*		570765	187.00
	U 18*		570770	187.00
	U 20*		570775	187.00
RBM Tita-gas	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC, see page 230.

4) Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 238.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

8) For making press joints for operating pressure ≤ PN 10.

9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

11) Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

12) Previous designation: C 26 pressing tongs

13) Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used. The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
Redi Nicoll Fluxo	TH 16*		570460	199.00
	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	THz 75 (PR-3B)	Z4	572829 R	670.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
Redi Nicoll Fluxo Gas	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
RIFENG U PRESS FITTING (F5)	U 14*		570760	187.00
	U 16*		570765	187.00
	U 18*		570770	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PZ-S)		572365	690.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 75 (PR-3B)	Z4	572828 R	710.00
RIFENG TH PRESS FITTING (F9)	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
RIQUIER A SERTIR	RFz 12*		571320	208.00
	RFz 16*		571325	208.00
	RFz 20*		571330	208.00
	RFz 25		571335	208.00
RIQUIER Système multicouche	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
RLS RAPID LOCKING SYSTEM	RLS ¼" S (PR-2B)	Z8	574828 R	162.00
	RLS ⅜" S (PR-2B)	Z8	574832 R	162.00
	RLS ½" S (PR-2B)	Z8	574834 R	162.00
	RLS ⅝" S (PR-2B)	Z8	574836 R	162.00
	RLS ¾" S (PR-2B)	Z8	574838 R	162.00
	RLS ⅞" S (PR-2B)	Z8	574840 R	162.00
Roth PressCheck	RN 14*		572672	187.00
	RN 16		572670	187.00
	RN 17*		572674	187.00
	RN 20*		572676	187.00
	RN 25/26		572678	187.00
	RN 32		572680	218.00
	RN 40 (PR-3S)	Z2	572714 R	720.00
	RN 50 (PR-3S)	Z2	572716 R	720.00
	RNz 63 (PR-3B)	Z4	572836 R	800.00
Rubinetterie Bresciane Bonomi FRABOPRESS 316 GAS M	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z!	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
Rubinetterie Bresciane Bonomi FRABOPRESS 316 GAS V	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 54		570175	395.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
Rubinetterie Bresciane Bonomi FRABOPRESS 316 M	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 66,7 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579107 R	1,250.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
Rubinetterie Bresciane Bonomi FRABOPRESS 316 V	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 54		570175	395.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
Rubinetterie Bresciane Bonomi FRABOPRESS CHROME	V 12		570107	165.00
	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 12 S (PR-2B)	Z8	574748 R	136.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
Rubinetterie Bresciane Bonomi FRABOPRESS C-STEEL M	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 66,7 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579107 R	1,250.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
Rubinetterie Bresciane Bonomi FRABOPRESS C-STEEL V	V 12		570107	165.00
	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 54		570175	395.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	V 12 S (PR-2B)	Z8	574748 R	136.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
Bresciane Bonomi FRABOPRESS GAS M	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
Rubinetterie Bresciane Bonomi FRABOPRESS GAS V	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 54		570175	395.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00

All prices excl. VAT

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
Rubinetterie	M 12		570100	165.00
Bresciane Bonomi	M 15		570110	165.00
FRABOPRESS M	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 66,7 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579107 R	1,250.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 12 S (PR-2B)	Z8	574736 R	136.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
Rubinetterie	V 15		570115	165.00
Bresciane Bonomi	V 18		570125	165.00
FRABOPRESS	V 22		570135	165.00
SOLAR	V 28		570145	165.00
	V 35		570155	165.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
Rubinetterie	V 12		570107	165.00
Bresciane Bonomi	V 15		570115	165.00
FRABOPRESS V	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 54		570175	395.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	V 12 S (PR-2B)	Z8	574748 R	136.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
Rubinetterie	M 15		570110	165.00
Bresciane	M 18		570120	165.00
Bonomi	M 22		570130	165.00
TURBO CuNi	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
Rubinetterie	B 14*		570845	217.00
Bresciane	B 16*		570850	217.00
Bonomi	B 18*		570855	217.00
TURBO PRESS	B 20*		570860	217.00
	B 26		570870	240.00
	B 32		570880	240.00
	H 14*		570310	179.00
	H 16*		570320	179.00
	H 18*		570340	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	TH 14*		570455	199.00
	TH 16*		570460	199.00
	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 14 S (PR-2B)**	Z8	574778 R	163.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 14*		570760	187.00
	U 16*		570765	187.00
	U 18*		570770	187.00
	U 20*		570775	187.00
	U 26*[12]		570750	218.00
	U 32		570785	218.00
	U 14 S (PR-2B)**	Z8	574858 R	153.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 18 S (PR-2B)**	Z8	574870 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 26 S (PR-2B)**	Z8	574866 R	179.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
Rubinetterie	TH 16*		570460	199.00
Bresciane	TH 20*		570470	199.00
Bonomi	TH 26*		570475	199.00
TURBO PRESS	TH 32		570480	199.00
GAS	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	S			
SA.MI PLASTIC	TH 14*		570455	199.00
	TH 16*		570460	199.00
	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 14 S (PR-2B)**	Z8	574778 R	163.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)**	Z8	574798 R	163.00

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC, see page 230.

4) Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 238.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

8) For making press joints for operating pressure ≤ PN 10.

9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

11) Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

12) Previous designation: C 26 pressing tongs

13) Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used. The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
SA.MI PLASTIC	TH 16*		570460	199.00
Multistrato Gas	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
SANHA	B 16*		570850	217.00
3fit-Press Pb-free	B 20*		570860	217.00
Serie 25000	B 26		570870	240.00
	B 32		570880	240.00
	F 16*		570717	190.00
	F 20*		570727	190.00
	F 26*		570730	205.00
	F 32		570735	205.00
	Fz 40		570742	219.00
	Fz 50		570747	332.00
	F 63 (PZ-S)		572385	690.00
	F 16 S (PR-2B)**	Z8	574728 R	156.00
	F 20 S (PR-2B)**	Z8	574730 R	156.00
	F 26 S (PR-2B)**	Z8	574732 R	169.00
	F 32 S (PR-2B)	Z8	574734 R	169.00
	H 16*		570320	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	H 40 (PZ-4G)		570390	610.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 26* [12]		570750	218.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 63 (PZ-S)		572365	690.00
SANHA	B 16*		570850	217.00
3fit-Press PPSU	B 20*		570860	217.00
Serie 35000	B 26		570870	240.00
	B 32		570880	240.00
	F 16*		570717	190.00
	F 20*		570727	190.00
	F 26*		570730	205.00
	F 32		570735	205.00
	F 16 S (PR-2B)**	Z8	574728 R	156.00
	F 20 S (PR-2B)**	Z8	574730 R	156.00
	F 26 S (PR-2B)**	Z8	574732 R	169.00
	F 32 S (PR-2B)	Z8	574734 R	169.00
	H 16*		570320	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 26* [12]		570750	218.00
	U 32		570785	218.00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
SANHA	VMP ½" G (OD 21,3 mm)		571766 R	229.00
Heavy Steel Press	VMPz ¾" (OD 26,9 mm)		571764	229.00
	VMPz 1" (OD 33,7 mm)		571767	229.00
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	760.00
	VMPz 1½" (PR-3B) (OD 48,3 mm)	Z5	572844 R	530.00
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845 R	530.00
SANHA	VMP ½" G (OD 21,3 mm) [11]		571766 R	229.00
Heavy Steel Press	VMPz ¾" (OD 26,9 mm)		571764	229.00
Gas [9]	VMPz 1" (OD 33,7 mm)		571767	229.00
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	760.00
	VMPz 1½" (PR-3B) (OD 48,3 mm)	Z5	572844 R	530.00
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845 R	530.00
SANHA-NiroSan	SA 15		570935	198.00
Gas Presssystem	SA 18		570940	198.00
Serie 17000	SA 22		570945	198.00
	SA 28		570950	198.00
	SA 35		570955	198.00
	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z7 XL 45 kN [4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S) [7]	Z7 XL 45 kN [4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S) [7]	Z7 XL 45 kN [4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54		570175	395.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
SANHA-NiroSan	SA 15		570935	198.00
Industry	SA 18		570940	198.00
Presssystem	SA 22		570945	198.00
Serie 18000	SA 28		570950	198.00
	SA 35		570955	198.00
	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	XP 64,0 XL (PR-3S)	Z6 XL [3] / Z7 XL 45 kN [4]	579100 R	1,150.00
	M 76,1 XL (PR-3S)	Z6 XL [3] / Z7 XL 45 kN [4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL [3] / Z7 XL 45 kN [4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL [3] / Z7 XL 45 kN [4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54		570175	395.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00

All prices excl. VAT

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
SANHA-NiroSan-Presssystem Serie 9000	SA 15		570935	198.00
	SA 18		570940	198.00
	SA 22		570945	198.00
	SA 28		570950	198.00
	SA 35		570955	198.00
	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	XP 64,0 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579100 R	1,150.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54		570175	395.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
SANHA-NiroSan SF Presssystem Serie 19000 (silicone free)	SA 15		570935	198.00
	SA 18		570940	198.00
	SA 22		570945	198.00
	SA 28		570950	198.00
	SA 35		570955	198.00
	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54		570175	395.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
SANHA NiroTherm Serie 91000	SA 15		570935	198.00
	SA 18		570940	198.00
	SA 22		570945	198.00
	SA 28		570950	198.00
	SA 35		570955	198.00
	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54		570175	395.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
SANHA NiroTherm Industry Serie 98000	SA 15		570935	198.00
	SA 18		570940	198.00
	SA 22		570945	198.00
	SA 28		570950	198.00
	SA 35		570955	198.00
	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54		570175	395.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC, see page 230.

4) Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 238.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

8) For making press joints for operating pressure ≤ PN 10.

9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

11) Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

12) Previous designation: C 26 pressing tongs

13) Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used. The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
SANHA-Press Chrom Serie 16000	SA 12		570930	288.00
	SA 15		570935	198.00
	SA 18		570940	198.00
	SA 22		570945	198.00
	SA 28		570950	198.00
	M 12		570100	165.00
	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 12 S (PR-2B)	Z8	574736 R	136.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	V 12		570107	165.00
	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 12 S (PR-2B)	Z8	574748 R	136.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
SANHA-Press GAS Pressfittings Serie 10000/ Serie 11000	SA 12		570930	288.00
	SA 14		570932	288.00
	SA 15		570935	198.00
	SA 16		570937	198.00
	SA 18		570940	198.00
	SA 22		570945	198.00
	SA 28		570950	198.00
	SA 35		570955	198.00
	M 12		570100	165.00
	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 12 S (PR-2B)	Z8	574736 R	136.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
	V 12		570107	165.00
	V 14		570132	165.00
	V 15		570115	165.00
	V 16		570137	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54		570175	395.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	V 12 S (PR-2B)	Z8	574748 R	136.00
	V 14 S (PR-2B)	Z8	574750 R	136.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 16 S (PR-2B)	Z8	574754 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
SANHA-Press Pressfittings Serie 6000	SA 12		570930	288.00
	SA 14		570932	288.00
	SA 15		570935	198.00
	SA 16		570937	198.00
	SA 18		570940	198.00
	SA 22		570945	198.00
	SA 28		570950	198.00
	SA 35		570955	198.00
	M 12		570100	165.00
	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	XP 64,0 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579100 R	1,150.00
	XP 66,7 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579108 R	1,250.00
	M 66,7 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579107 R	1,250.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 12 S (PR-2B)	Z8	574736 R	136.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
	V 12		570107	165.00
	V 14		570132	165.00
	V 15		570115	165.00
	V 16		570137	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54		570175	395.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	V 12 S (PR-2B)	Z8	574748 R	136.00
	V 14 S (PR-2B)	Z8	574750 R	136.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 16 S (PR-2B)	Z8	574754 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
SANHA-Press SOLAR Pressfittings Serie 12000/ Serie 13000	SA 12		570930	288.00
	SA 15		570935	198.00
	SA 18		570940	198.00
	SA 22		570945	198.00
	SA 28		570950	198.00
	SA 35		570955	198.00
	M 12		570100	165.00
	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	XP 64,0 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579100 R	1,150.00
	XP 66,7 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579108 R	1,250.00
	M 66,7 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579107 R	1,250.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 12 S (PR-2B)	Z8	574736 R	136.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
	V 12		570107	165.00
	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54		570175	395.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	V 12 S (PR-2B)	Z8	574748 R	136.00
	V 14 S (PR-2B)	Z8	574750 R	136.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 16 S (PR-2B)	Z8	574754 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
SANHA PURAPRESS Serie 8000	SA 12		570930	288.00
	SA 14		570932	288.00
	SA 15		570935	198.00
	SA 16		570937	198.00
	SA 18		570940	198.00
	SA 22		570945	198.00
	SA 28		570950	198.00
	SA 35		570955	198.00
	M 12		570100	165.00
	M 15[1]		570110	165.00
	M 18[1]		570120	165.00
	M 22[1]		570130	165.00
	M 28[1]		570140	165.00
	M 35[1]		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	XP 64,0 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579100 R	1,150.00
	XP 66,7 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579108 R	1,250.00
	M 66,7 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579107 R	1,250.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 12 S (PR-2B)	Z8	574736 R	136.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
	V 12		570107	165.00
	V 14		570132	165.00
	V 15		570115	165.00
	V 16		570137	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54		570175	395.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	V 12 S (PR-2B)	Z8	574748 R	136.00
	V 14 S (PR-2B)	Z8	574750 R	136.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 16 S (PR-2B)	Z8	574754 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00

All prices excl. VAT

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
SANHA-Therm Serie 24000	SA 12		570930	288.00
	SA 15		570935	198.00
	SA 18		570940	198.00
	SA 22		570945	198.00
	SA 28		570950	198.00
	SA 35		570955	198.00
	M 12		570100	165.00
	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	XP 66,7 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579108 R	1,250.00
	M 66,7 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579107 R	1,250.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 12 S (PR-2B)	Z8	574736 R	136.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
	V 12		570107	165.00
	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54		570175	395.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	V 12 S (PR-2B)	Z8	574748 R	136.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
SANHA-Therm Industry Serie 28000	SA 12		570930	288.00
	SA 15		570935	198.00
	SA 18		570940	198.00
	SA 22		570945	198.00
	SA 28		570950	198.00
	SA 35		570955	198.00
	M 12		570100	165.00
	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	XP 66,7 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579108 R	1,250.00
	M 66,7 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579107 R	1,250.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 12 S (PR-2B)	Z8	574736 R	136.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
	V 12		570107	165.00
	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54		570175	395.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	V 12 S (PR-2B)	Z8	574748 R	136.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
SANITOP PERMATUBO INOX	M 15		570110	165.00
	M 18[1]		570120	165.00
	M 22		570130	165.00
	M 28[1]		570140	165.00
	M 35		570150	165.00
	M 42 (PZ-4G)		570160	540.00
	M 54 (PZ-4G)		570170	540.00
	M 35 (PR-3S)	Z2	572727 R	720.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
SANPRO THPRESS	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
SATEC SK VITerm	TH 16*		570460	199.00
	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PZ-S)		572365	690.00
SAVEUR REFLEX PEX Water	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 32		570480	199.00
SAVEUR REFLEX PEX-AL-PEX Gas	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 32		570480	199.00
Schütz duo-flex tri-o-flex	TH 14*		570455	199.00
	TH 16*		570460	199.00
	TH 17*		570462	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
Schwer Fittings AQUApress	M 12		570100	165.00
	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PZ-4G)		570160	540.00
	M 54 (PZ-4G)		570170	540.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 12 S (PR-2B)	Z8	574736 R	136.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
Seppelfricke	> Aalberts integrated piping systems			
SESTA SESTA GAS	TH 14*		570455	199.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 14 S (PR-2B)**	Z8	574778 R	163.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC, see page 230.

4) Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 238.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

8) For making press joints for operating pressure ≤ PN 10.

9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

11) Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

12) Previous designation: C 26 pressing tongs

13) Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used. The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
SESTA Sistema multistrato	H 16*		570320	179.00
	H 20*		570350	179.00
	TH 14*		570455	199.00
	TH 16*		570460	199.00
	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 14 S (PR-2B)**	Z8	574778 R	163.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
SIGMA LI Premium	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
SLOVARM PEX-THERM	B 16		570850	217.00
	B 20		570860	217.00
	B 26		570870	240.00
	B 32		570880	240.00
	F 16		570717	190.00
	F 20		570727	190.00
	F 26		570730	205.00
	F 32		570735	205.00
	H 16		570320	179.00
	H 20		570350	179.00
	H 26		570370	179.00
	H 32		570380	179.00
	TH 16		570460	199.00
	TH 20		570470	199.00
	TH 26		570475	199.00
	TH 32		570480	199.00
	U 16		570765	187.00
	U 20		570775	187.00
	U 32		570785	218.00
STANDARD HIDRAULICA MultiStandard	RFz 16*		571325	208.00
	RFz 20*		571330	208.00
	RFz 25		571335	208.00
	RFz 32		571340	208.00
	U 16*		570765	187.00
	U 18*		570770	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 63 (PZ-S)		572365	690.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 18 S (PR-2B)**	Z8	574870 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
STANDARD HIDRAULICA MultiStandard PLUS	H 16*		570320	179.00
	H 20*		570350	179.00
	H 25*		570360	179.00
	H 32		570380	179.00
	RFz 16*		571325	208.00
	RFz 20*		571330	208.00
	RFz 25		571335	208.00
	RFz 32		571340	208.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 32 S (PR-2B)**	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 18*		570770	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 18 S (PR-2B)**	Z8	574870 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
steeltrade Presssystem Edelstahl Kontur M	M 15		570110	165.00
	M 18[1]		570120	165.00
	M 22		570130	165.00
	M 28[1]		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
STELBI Polikraft	H 16*		570320	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 26*[12]		570750	218.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 26 S (PR-2B)**	Z8	574866 R	179.00
STELBI Stelgas	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
STH Westco COPPER PRESS	M 15		570110	165.00
	M 22		570130	165.00
	M 28[1]		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00

T

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
TDM BRASS Serie 1600	H 16*		570320	179.00
	H 18*		570340	179.00
	H 20*		570350	179.00
	H 25*		570360	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	TH 16*		570460	199.00
	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 26*		570475	199.00
	THL 32		570487	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	U 16*		570765	187.00
	U 18*		570770	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 26*[12]		570750	218.00
	U 32		570785	218.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 18 S (PR-2B)**	Z8	574870 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 26 S (PR-2B)**	Z8	574866 R	179.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
TDM BRASS Serie 2600	H 16*		570320	179.00
	H 18*		570340	179.00
	H 20*		570350	179.00
	H 25*		570360	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	TH 16*		570460	199.00
	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 26*		570475	199.00
	THL 32		570487	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	U 16*		570765	187.00
	U 18*		570770	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 26*[12]		570750	218.00
	U 32		570785	218.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 18 S (PR-2B)**	Z8	574870 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 26 S (PR-2B)**	Z8	574866 R	179.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
TDM BRASS Serie 1700 gas	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	THL 32		570487	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
TermoConcept TC-PRESS	Basic E01[5]		571855	331.00
THERMOLUTZ	H 14*		570310	179.00
	H 16*		570320	179.00
	TH 20*		570470	199.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
TE-SA	TH 14*		570455	199.00
TE-SA press	TH 16*		570460	199.00
serie 800	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 14 S (PR-2B)**	Z8	574778 R	163.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
THERMACOME	H 16*		570320	179.00
ACOPEX ALU	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
TIEMME	TH 14*		570455	199.00
Serie 1650	TH 16*		570460	199.00
AL-COBRAPEX	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 26*		570475	199.00
	THL 32		570487	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	THz 75 (PR-3B)	Z4	572829 R	670.00
	TH 14 S (PR-2B)**	Z8	574778 R	163.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
TIEMME	TH 16*		570460	199.00
Serie 1650CT	TH 20*		570470	199.00
Serie COMPACT	TH 25*		570495	199.00
	TH 26*		570475	199.00
	THL 32		570487	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
TIEMME	TH 14*		570455	199.00
Serie 1650SN	TH 16*		570460	199.00
	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 26*		570475	199.00
	THL 32		570487	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 14 S (PR-2B)**	Z8	574778 R	163.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
TIEMME	TH 16*		570460	199.00
Serie 1650CTSN	TH 20*		570470	199.00
Serie COMPACT	TH 25*		570495	199.00
	TH 26*		570475	199.00
	THL 32		570487	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
TIEMME	RFz 12*		571320	208.00
Serie 1700 COBRAPEX	RFz 16*		571325	208.00
	RFz 20*		571330	208.00
	RFz 25		571335	208.00
	RFz 32		571340	208.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
TIEMME	TH 16*		570460	199.00
Serie 2650 GAS	TH 20*		570470	199.00
	TH 26*		570475	199.00
	THL 32		570487	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
TIGRE	TH 16*		570460	199.00
ALPEX GÁS	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
TKM	TH 14*		570455	199.00
Systemtechnik	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
TRA Multi TRA+	H 16*		570320	179.00
	H 20*		570350	179.00
	H 25*		570360	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	H 40 (PZ-4G)		570390	610.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	THz 75 (PR-3B)	Z4	572829 R	670.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 26* [12]		570750	218.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 63 (PZ-S)		572365	690.00
	U 75 (PR-3B)	Z4	572828 R	710.00
TRA MULTITRAPRESS	U 16*		570765	187.00
	U 18*		570770	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 63 (PZ-S)		572365	690.00

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

[1] Only pressing tongs from designation “108” (1st quarter of 2008), “208” (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

[2] For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

[3] Driven by REMS Power-Press XL ACC, see page 230.

[4] Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 238.

[5] For taking suitable pressing inserts.

[6] Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

[7] Use pressing rings labelled “M 88.9 G” or “M 108 G” on the three pressing segments for gas installations.

[8] For making press joints for operating pressure ≤ PN 10.

[9] For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

[10] For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

[11] Only use pressing tongs identified by “VMP ½” G” on the pressing jaws for gas installations.

[12] Previous designation: C 26 pressing tongs

[13] Only pressing tongs/S pressing rings (PR-2B) from designation “125” (1st quarter of 2025), “225” (2nd quarter of 2025) etc. can be used. The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
TRA TRAPRESS	H 12*		570300	179.00
	H 16*		570320	179.00
	H 20*		570350	179.00
	H 25*		570360	179.00
	H 32		570380	179.00
	RFz 12*		571320	208.00
	RFz 16*		571325	208.00
	RFz 20*		571330	208.00
	RFz 25		571335	208.00
	RFz 32		571340	208.00
Tradelink TradePex Crimp Water	K16/P18*		572600	208.00
	K/20*		572605	208.00
	K/25*		572610	208.00
	K32		572615	208.00
	K1/40		572620	208.00
	K1/50		572625	340.00
Tradelink TradePex Crimp Gas	K16/P18*		572600	208.00
	K/20*		572605	208.00
	K/25*		572610	208.00
	K32		572615	208.00
	K1/40		572620	208.00
	K1/50		572625	340.00
TUBIPLAST ITALY MULTILAYER PIPE	H 16*		570320	179.00
	H 18*		570340	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	TH 16*		570460	199.00
	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 18*		570770	187.00
	U 20*		570775	187.00
	U 26* [12]		570750	218.00
	U 32		570785	218.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 18 S (PR-2B)**	Z8	574870 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 26 S (PR-2B)**	Z8	574866 R	179.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
TUBIPLAST ITALY MULTILAYER PIPE GAS SYSTEM	TH 16*		570460	199.00
	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
TWEETOP	U 16*		570765	187.00
	U 18*		570770	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PZ-S)		572365	690.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 75 (PR-3B)	Z4	572828 R	710.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 18 S (PR-2B)**	Z8	574870 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
U				
UNICAL AG MAX-MULTIPEX	H 26*		570370	179.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 26* [12]		570750	218.00
	U 32		570785	218.00
UNIDELTA DELTAPRESS	H 16*		570320	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	H 40 (PZ-4G)		570390	610.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PZ-S)		572365	690.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
Uponor	UP 14*		572630	187.00
	UP 16*		572632	187.00
	UP 20*		572636	187.00
	UP 25		572638	187.00
	UP 32		572640	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 63 (PZ-S)		572365	690.00
	U 75 (PR-3B)	Z4	572828 R	710.00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
V				
Valsir Bravopress	B 16*		570850	217.00
	B 20*		570860	217.00
	B 26		570870	240.00
	B 32		570880	240.00
	F 16*		570717	190.00
	F 20*		570727	190.00
	F 26*		570730	205.00
	F 16 S (PR-2B)**	Z8	574728 R	156.00
	F 20 S (PR-2B)**	Z8	574730 R	156.00
	F 26 S (PR-2B)**	Z8	574732 R	169.00
	H 16*		570320	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	H 32 V		570685	233.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 26* [12]		570750	218.00
	U 32		570785	218.00
Valsir PEXAL	H 14*		570310	179.00
	H 16*		570320	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	H 32 V		570685	233.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 26* [12]		570750	218.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 63 (PZ-S)		572365	690.00
	U 75 (PR-3B)	Z4	572828 R	710.00
Van Marcke NV SYSTEMPEX	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	THz 75 (PR-3B)	Z4	572829 R	670.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
Van Marcke NV Tubipress	M 12		570100	165.00
	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PZ-4G)		570160	540.00
	M 54 (PZ-4G)		570170	540.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL [3] / Z7 XL 45 kN [4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL [3] / Z7 XL 45 kN [4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL [3] / Z7 XL 45 kN [4]	579111 R	1,460.00
	M 12 S (PR-2B)	Z8	574736 R	136.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
Variotherm System TH	TH 11,6*		570482	199.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 11,6 S (PR-2B)**	Z8	574774 R	163.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
VESBO CARBON	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL [3] / Z7 XL 45 kN [4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL [3] / Z7 XL 45 kN [4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL [3] / Z7 XL 45 kN [4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
VESBO INOX	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL [3] / Z7 XL 45 kN [4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL [3] / Z7 XL 45 kN [4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL [3] / Z7 XL 45 kN [4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
VESBO MULTIPRESS TH-U	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 26* [12]		570750	218.00
	U 32		570785	218.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 26 S (PR-2B)**	Z8	574866 R	179.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
VESBO VPREMIUM	U 16*		570765	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 50		570795	320.00
	U 63 (PZ-S)		572365	690.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
Viega Fonterra	VX 12*		571630	229.00
	VP 14/15*		570905	198.00
	VP 16/17*		570910	198.00
	VP 20*		570915	198.00
	VP 25 [2]		570920	198.00
Viega MegaPress (ASTM) [10]	VMP ⅜" (OD 17,2 mm)		571740	229.00
	VMP ½" G (OD 21,3 mm)		571766 R	229.00
	VMPz ¾" (OD 26,9 mm)		571764	229.00
	VMPz 1" (OD 33,7 mm)		571767	229.00
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	760.00
	VMPz 1½" (PR-3B) (OD 48,3 mm)	Z5	572844 R	530.00
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845 R	530.00
Viega MegaPress 304 FKM (ASTM) [10]	VMP ½" G (OD 21,3 mm)		571766 R	229.00
	VMPz ¾" (OD 26,9 mm)		571764	229.00
	VMPz 1" (OD 33,7 mm)		571767	229.00
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	760.00
	VMPz 1½" (PR-3B) (OD 48,3 mm)	Z5	572844 R	530.00
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845 R	530.00
Viega MegaPress 316 (ASTM) [10]	VMP ½" G (OD 21,3 mm)		571766 R	229.00
	VMPz ¾" (OD 26,9 mm)		571764	229.00
	VMPz 1" (OD 33,7 mm)		571767	229.00
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	760.00
	VMPz 1½" (PR-3B) (OD 48,3 mm)	Z5	572844 R	530.00
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845 R	530.00
Viega MegaPress 316 FKM (ASTM) [10]	VMP ½" G (OD 21,3 mm)		571766 R	229.00
	VMPz ¾" (OD 26,9 mm)		571764	229.00
	VMPz 1" (OD 33,7 mm)		571767	229.00
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	760.00
	VMPz 1½" (PR-3B) (OD 48,3 mm)	Z5	572844 R	530.00
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845 R	530.00
Viega MegaPress CuNi (ASTM) [10]	VMP ½" G (OD 21,3 mm)		571766 R	229.00
	VMPz ¾" (OD 26,9 mm)		571764	229.00
	VMPz 1" (OD 33,7 mm)		571767	229.00
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	760.00
	VMPz 1½" (PR-3B) (OD 48,3 mm)	Z5	572844 R	530.00
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845 R	530.00
Viega MegaPress FKM (ASTM) [10]	VMP ½" G (OD 21,3 mm)		571766 R	229.00
	VMPz ¾" (OD 26,9 mm)		571764	229.00
	VMPz 1" (OD 33,7 mm)		571767	229.00
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	760.00
	VMPz 1½" (PR-3B) (OD 48,3 mm)	Z5	572844 R	530.00
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845 R	530.00
Viega Megapress (EN) [9]	VMP ⅜" (OD 17,2 mm)		571740	229.00
	VMP ½" G (OD 21,3 mm)		571766 R	229.00
	VMPz ¾" (OD 26,9 mm)		571764	229.00
	VMPz 1" (OD 33,7 mm)		571767	229.00
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	760.00
	VMPz 1½" (PR-3B) (OD 48,3 mm)	Z5	572844 R	530.00
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845 R	530.00
Viega Megapress S (EN) [9]	VMP ⅜" (OD 17,2 mm)		571740	229.00
	VMP ½" G (OD 21,3 mm)		571766 R	229.00
	VMPz ¾" (OD 26,9 mm)		571764	229.00
	VMPz 1" (OD 33,7 mm)		571767	229.00
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	760.00
	VMPz 1½" (PR-3B) (OD 48,3 mm)	Z5	572844 R	530.00
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845 R	530.00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
Viega Megapress S XL (EN) [9]	VMPz 2½" XL (PR-3B) EN (OD 76,1 mm)	Z7 XL 45 kN [4]	579112 R	660.00
	VMPz 3" XL (PR-3B) (OD 88,9 mm)	Z7 XL 45 kN [4]	579113 R	660.00
	VMPz 4" XL (PR-3B) (OD 114,3 mm)	Z7 XL 45 kN [4]	579114 R	700.00
Viega Pexfit	VX 16*		571635	229.00
	VX 20*		571640	229.00
	VX 25*		571645	229.00
Viega Pexfit G	VX 16*		571635	229.00
	VX 20*		571640	229.00
	VX 25*		571645	229.00
Viega Prestabo	V 12		570107	165.00
	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54		570175	395.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	VFz 64,0 (PR-3B) [6]	Z5	572815 R	670.00
	VFz 76,1 (PR-3B) [6]	Z5	572816 R	670.00
	VFz 88,9 (PR-3B) [6]	Z5	572817 R	710.00
	VFz 108,0 (PR-3B) [6]	Z5	572818 R	710.00
	V 12 S (PR-2B)	Z8	574748 R	136.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
Viega Profipress	V 12		570107	165.00
	V 14 [13]		570132	165.00
	V 15		570115	165.00
	V 16 [13]		570137	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54		570175	395.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	VFz 64,0 (PR-3B) [6]	Z5	572815 R	670.00
	VFz 66,7 (PR-3B)	Z5	572846 R	670.00
	VFz 76,1 (PR-3B) [6]	Z5	572816 R	670.00
	VFz 88,9 (PR-3B) [6]	Z5	572817 R	710.00
	VFz 108,0 (PR-3B) [6]	Z5	572818 R	710.00
	V 12 S (PR-2B)	Z8	574748 R	136.00
	V 14 S (PR-2B) [13]	Z8	574750 R	136.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 16 S (PR-2B) [13]	Z8	574754 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
Viega Profipress G	V 12		570107	165.00
	V 14 [13]		570132	165.00
	V 15		570115	165.00
	V 16 [13]		570137	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54		570175	395.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	VFz 64,0 (PR-3B) [6]	Z5	572815 R	670.00
	V 12 S (PR-2B)	Z8	574748 R	136.00
	V 14 S (PR-2B) [13]	Z8	574750 R	136.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 16 S (PR-2B) [13]	Z8	574754 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
Viega Profipress S	V 12		570107	165.00
	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 12 S (PR-2B)	Z8	574748 R	136.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC, see page 230.

4) Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 238.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

8) For making press joints for operating pressure ≤ PN 10.

9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

11) Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

12) Previous designation: C 26 pressing tongs

13) Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used. The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
Viega Profipress Therm	V 12		570107	165.00
	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 12 S (PR-2B)	Z8	574748 R	136.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
Viega ProPress (ASTM)[10]	VUS ½" (OD 15,9 mm)		571770	199.00
	VUS ¾" (OD 22,2 mm)		571775	199.00
	VUS 1" (OD 28,6 mm)		571780	199.00
	VUS 1¼" (OD 34,9 mm)		571785	199.00
	VUS 1½" (OD 41,3 mm)		571790	385.00
	VUS 2" (OD 54,0 mm)		571795	395.00
XL-C/XL-S	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819 R	670.00
XL-C/XL-S	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	670.00
XL-C/XL-S	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	710.00
Viega ProPress 304 FKM (ASTM)[10]	VUS ½" (OD 15,9 mm)		571770	199.00
	VUS ¾" (OD 22,2 mm)		571775	199.00
	VUS 1" (OD 28,6 mm)		571780	199.00
	VUS 1¼" (OD 34,9 mm)		571785	199.00
	VUS 1½" (OD 41,3 mm)		571790	385.00
	VUS 2" (OD 54,0 mm)		571795	395.00
XL-C/XL-S	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819 R	670.00
XL-C/XL-S	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	670.00
XL-C/XL-S	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	710.00
Viega ProPress 316 (ASTM)[10]	VUS ½" (OD 15,9 mm)		571770	199.00
	VUS ¾" (OD 22,2 mm)		571775	199.00
	VUS 1" (OD 28,6 mm)		571780	199.00
	VUS 1¼" (OD 34,9 mm)		571785	199.00
	VUS 1½" (OD 41,3 mm)		571790	385.00
	VUS 2" (OD 54,0 mm)		571795	395.00
XL-C/XL-S	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819 R	670.00
XL-C/XL-S	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	670.00
XL-C/XL-S	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	710.00
Viega Propress WATER System AUS	VAU 15 (OD 12,7 mm)		572687	170.00
	VAU 20 (OD 19,1 mm)		572689	170.00
	VAU 25 (OD 25,4 mm)		572691	170.00
	VAU 32 (OD 31,8 mm)		572693	180.00
	VAU 40 (OD 38,1 mm)		572695	266.00
	VAU 50 (OD 50,8 mm)		572697	471.00
	VAU 15 S (PR-2B) (OD 12,7 mm)	Z8	574804 R	140.00
	VAU 20 S (PR-2B)** (OD 19,1 mm)	Z8	574806 R	140.00
	VAU 25 S (PR-2B)** (OD 25,4 mm)	Z8	574808 R	140.00
	VAU 32 S (PR-2B) (OD 31,8 mm)	Z8	574856 R	147.00
Viega PropressG GAS System AUS	VAU 15 (OD 12,7 mm)		572687	170.00
	VAU 20 (OD 19,1 mm)		572689	170.00
	VAU 25 (OD 25,4 mm)		572691	170.00
	VAU 32 (OD 31,8 mm)		572693	180.00
	VAU 40 (OD 38,1 mm)		572695	266.00
	VAU 50 (OD 50,8 mm)		572697	471.00
Viega Raxinox	VRX 16		571750	209.00
	VRX 20		571752	209.00
Viega Raxofix	VRX 16		571750	209.00
	VRX 20		571752	209.00
	VRX 25		571754	229.00
	VRX 32		571756	229.00
	VRX 40		571758	319.00
	VRX 50		571760	373.00
	VRX 63		571797	720.00
Viega Sanfix[2]	VP 16/17[2]		570910	198.00
	VP 20[2]		570915	198.00
	VP 25[2]		570920	198.00
	VP 32		570925	219.00
	VP 40 (PZ-4G)		570970	530.00
	VPz 50 (PZ-S)		572350	690.00
	VPz 63 (PZ-S)		572355	690.00
Viega Sanfix Fosta[2]	VP 16/17[2]		570910	198.00
	VP 20[2]		570915	198.00
	VP 25[2]		570920	198.00
	VP 32		570925	219.00
	VP 40 (PZ-4G)		570970	530.00
	VPz 50 (PZ-S)		572350	690.00
	VPz 63 (PZ-S)		572355	690.00
Viega Sanpress	V 12		570107	165.00
	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54		570175	395.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	VR 76,1 (PR-3B)[6]	Z5	572822 R	670.00
	VR 88,9 (PR-3B)[6]	Z5	572823 R	710.00
	VR 108,0 (PR-3B)[6]	Z5	572824 R	710.00
	V 12 S (PR-2B)	Z8	574748 R	136.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
Viega Sanpress Inox	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54		570175	395.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	VFz 64,0 (PR-3B)[6]	Z5	572815 R	670.00
	VFz 76,1 (PR-3B)[6]	Z5	572816 R	670.00
	VFz 88,9 (PR-3B)[6]	Z5	572817 R	710.00
	VFz 108,0 (PR-3B)[6]	Z5	572818 R	710.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
Viega Sanpress Inox G	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54		570175	395.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	VFz 64,0 (PR-3B)[6]	Z5	572815 R	670.00
	VFz 76,1 (PR-3B)[6]	Z5	572816 R	670.00
	VFz 88,9 (PR-3B)[6]	Z5	572817 R	710.00
	VFz 108,0 (PR-3B)[6]	Z5	572818 R	710.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
Viega Smartpress	VX 16*		571635	229.00
	VX 20*		571640	229.00
	VX 25*		571645	229.00
Viega Temponox	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54		570175	395.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	VFz 76,1 (PR-3B)[6]	Z5	572816 R	670.00
	VFz 88,9 (PR-3B)[6]	Z5	572817 R	710.00
	VFz 108,0 (PR-3B)[6]	Z5	572818 R	710.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
Viessmann	TH 14*		570455	199.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
Vogel & Noot EASYTEC	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
VSH	> Aalberts integrated piping systems			

W

Watts MTR Art press	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
WATTS RADIANT Watts WaterPEX	US ⅜"*		571450	226.00
	US ½"*		571455	226.00
	US ¾"*		571460	226.00
	US 1"*		571465	226.00
	US 1 ¼"		571470	226.00
	US 1 ½"		571475	226.00
WATTS RADIANT Watts RadiantPEX	US ⅜"*		571450	226.00
	US ½"*		571455	226.00
	US ¾"*		571460	226.00
	US 1"*		571465	226.00
	US 1 ¼"		571470	226.00
	US 1 ½"		571475	226.00
WATTS RADIANT Watts RadiantPEX-AL	U 16 (½")		570765	187.00
	U 20 (⅝")		570775	187.00
	U 25 (¾")		570780	187.00
	U 32 (1")		570785	218.00
Wavin Tigris K1/M1	U 50		570795	320.00
	U 63 (PR-3B)	Z4	572837 R	800.00
	U 63 (PZ-S)		572365	690.00
	U 75 (PR-3B)	Z4	572828 R	710.00
Wavin Tigris K5/M5	B 16*		570850	217.00
	B 20*		570860	217.00
	B 32		570880	240.00
	H 16*		570320	179.00
	H 20*		570350	179.00
	H 25*		570360	179.00
	H 32		570380	179.00
	H 40 (PZ-4G)		570390	610.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 25*		570495	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 25 S (PR-2B)**	Z8	574792 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
	U 25*		570780	187.00
	U 32		570785	218.00
	U 40		570790	266.00
	U 16 S (PR-2B)**	Z8	574860 R	153.00
	U 20 S (PR-2B)**	Z8	574862 R	153.00
	U 25 S (PR-2B)**	Z8	574864 R	153.00
	U 32 S (PR-2B)	Z8	574868 R	179.00
	UP 16*		572632	187.00
	UP 20*		572636	187.00
	UP 25		572638	187.00
	UP 32		572640	218.00

All prices excl. VAT

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
WEECON PRESS-C-Stahl	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PZ-4G)		570160	540.00
	M 54 (PZ-4G)		570170	540.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
WEECON PRESS-Edelstahl	M 15		570110	165.00
	M 18		570120	165.00
	M 22		570130	165.00
	M 28		570140	165.00
	M 35		570150	165.00
	M 42 (PZ-4G)		570160	540.00
	M 54 (PZ-4G)		570170	540.00
	M 42 (PR-3S)	Z2	572706 R	720.00
	M 54 (PR-3S)	Z2	572708 R	720.00
	M 76,1 XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579101 R	1,250.00
	M 88,9 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579110 R	1,460.00
	M 108,0 G XL (PR-3S)	Z6 XL[3] / Z7 XL 45 kN[4]	579111 R	1,460.00
	M 15 S (PR-2B)	Z8	574738 R	136.00
	M 18 S (PR-2B)	Z8	574740 R	136.00
	M 22 S (PR-2B)	Z8	574742 R	136.00
	M 28 S (PR-2B)	Z8	574744 R	136.00
	M 35 S (PR-2B)	Z8	574746 R	136.00
WEECON PRESSS-Kupfer	V 15		570115	165.00
	V 18		570125	165.00
	V 22		570135	165.00
	V 28		570145	165.00
	V 35		570155	165.00
	V 42		570165	385.00
	V 42 (PR-2B)	Z2	572850 R	345.00
	V 54		570175	395.00
	V 54 (PR-2B)	Z2	572851 R	372.00
	V 15 S (PR-2B)	Z8	574752 R	136.00
	V 18 S (PR-2B)	Z8	574756 R	136.00
	V 22 S (PR-2B)	Z8	574758 R	136.00
	V 28 S (PR-2B)	Z8	574760 R	136.00
	V 35 S (PR-2B)	Z8	574762 R	136.00
WEM	U 16*		570765	187.00
WIELAND-WERKE cuprotherm CTX[2]	TH 14[2]		570455	199.00
	TH 16[2]		570460	199.00
WKS-Press	TH 14*		570455	199.00
	TH 16*		570460	199.00
	TH 17*		570462	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
WÜRTH Würth	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	HE 32		571900	238.00
	HEz 40		571904	345.00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	£
	X			
XtraConnect	F 16*		570717	190.00
	F 20*		570727	190.00
	F 26*		570730	205.00
	F 32		570735	205.00
	F 16 S (PR-2B)**	Z8	574728 R	156.00
	F 20 S (PR-2B)**	Z8	574730 R	156.00
	F 26 S (PR-2B)**	Z8	574732 R	169.00
	F 32 S (PR-2B)	Z8	574734 R	169.00
	H 16*		570320	179.00
	H 20*		570350	179.00
	H 26*		570370	179.00
	H 32		570380	179.00
	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
	U 16*		570765	187.00
	U 20*		570775	187.00
(DN 26)	U 25*		570780	187.00
	U 32		570785	218.00
	VP 16*		570910	198.00
	VP 20*		570915	198.00
	VP 32		570925	219.00
	Z			
ZEWOTHERM Zewo Press Premium	TH 12*		570452	199.00
	TH 16*		570460	199.00
	TH 17*		570462	199.00
	TH 18*		570465	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 40		570485	264.00
	TH 50 (PZ-S)		572400	690.00
	TH 63 (PZ-S)		572405	690.00
	TH 12 S (PR-2B)**	Z8	574776 R	163.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 17 S (PR-2B)**	Z8	574784 R	163.00
	TH 18 S (PR-2B)**	Z8	574786 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
ZEWOTHERM Zewo Press PPSU	TH 16*		570460	199.00
	TH 20*		570470	199.00
	TH 26*		570475	199.00
	TH 32		570480	199.00
	TH 16 S (PR-2B)**	Z8	574782 R	163.00
	TH 20 S (PR-2B)**	Z8	574788 R	163.00
	TH 26 S (PR-2B)**	Z8	574794 R	163.00
	TH 32 S (PR-2B)	Z8	574798 R	163.00
ZURN INDUSTRIES ZURN PEX	US ⅜"*		571450	226.00
	US ½"*		571455	226.00
	US ¾"*		571460	226.00
	US 1"*		571465	226.00
	US 1 ¼"		571470	226.00
	US 1 ½"		571475	226.00
	US 2"		571477	305.00

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 227. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 227. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC, see page 230.

4) Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 238.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

8) For making press joints for operating pressure ≤ PN 10.

9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

11) Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

12) Previous designation: C 26 pressing tongs

13) Only pressing tongs/S pressing rings (PR-2B) from designation "125" (1st quarter of 2025), "225" (2nd quarter of 2025) etc. can be used. The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 13.10.2025. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 288 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.