
UTS SALES AND REPAIRS


A SAFER WAY TO REACH NEW HEIGHTS

STAGING BOARD | **WIDTH** | **450MM**

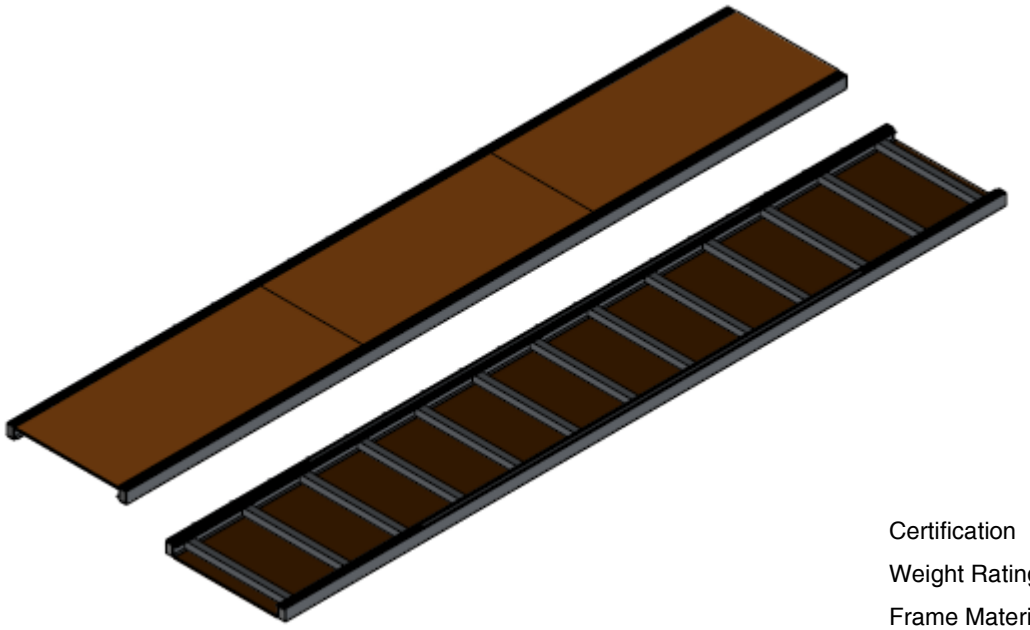

Available Lengths	Stile Depth
2.4m	60mm
3.0m	60mm
3.6m	60mm
4.2m	90mm
4.8m	90mm
5.4m	90mm


Certification	BS8630
Weight Rating	250kg
Frame Material	6082T6 Aluminium
Platform Material	Marine Plywood, Non-slip Finish

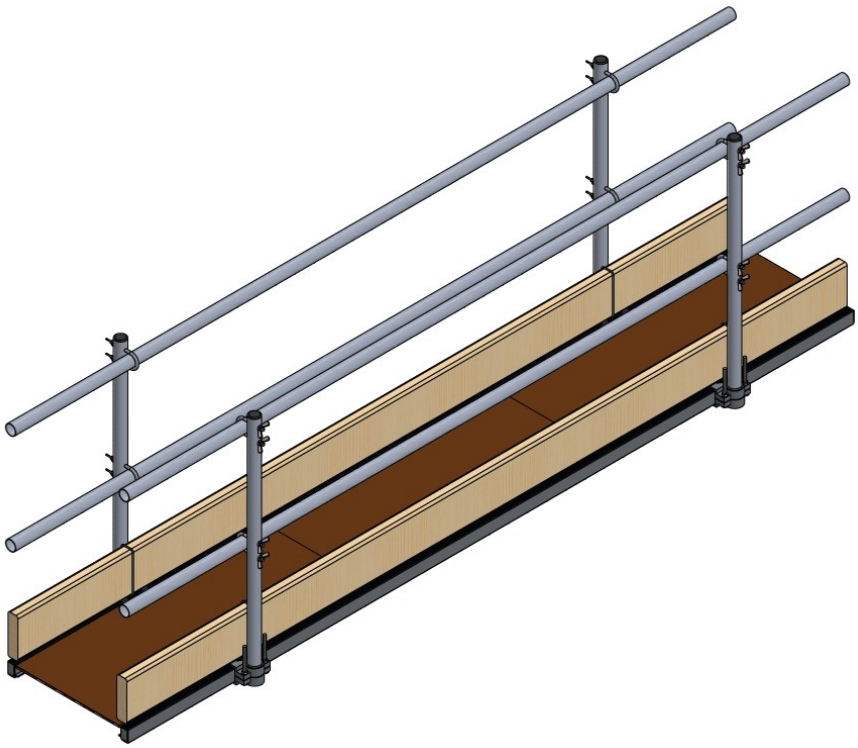


NUMBER OF POST PER SIDE OF STAGING.

Posts should be spaced 0.6m from ends of the staging board.
There should never be a gap of more than 2.5m between posts, and they should be equally spaced.

Length	Posts
2.4m	2
3.0m	2
3.6m	2
4.2m	3
4.8m	3
5.4m	3
5.95m	3



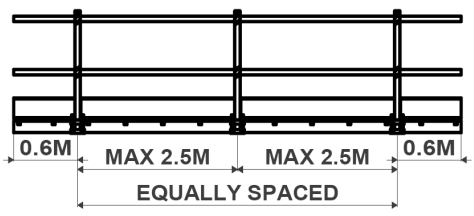

01227 860085
Mon-Fri, 8am until 5pm

For More Information:

info@towersandpodiums.co.uk

We reply within 1 hour

MADE IN BRITAIN


FORS FLEET OPERATOR RECOGNITION SCHEME

TARGETMARK CERTIFIED
BS 8630:2019
TM1011
testandresearch.org

UTS SALES AND REPAIRS


A SAFER WAY TO REACH NEW HEIGHTS

STAGING BOARD | **WIDTH** | **600MM**

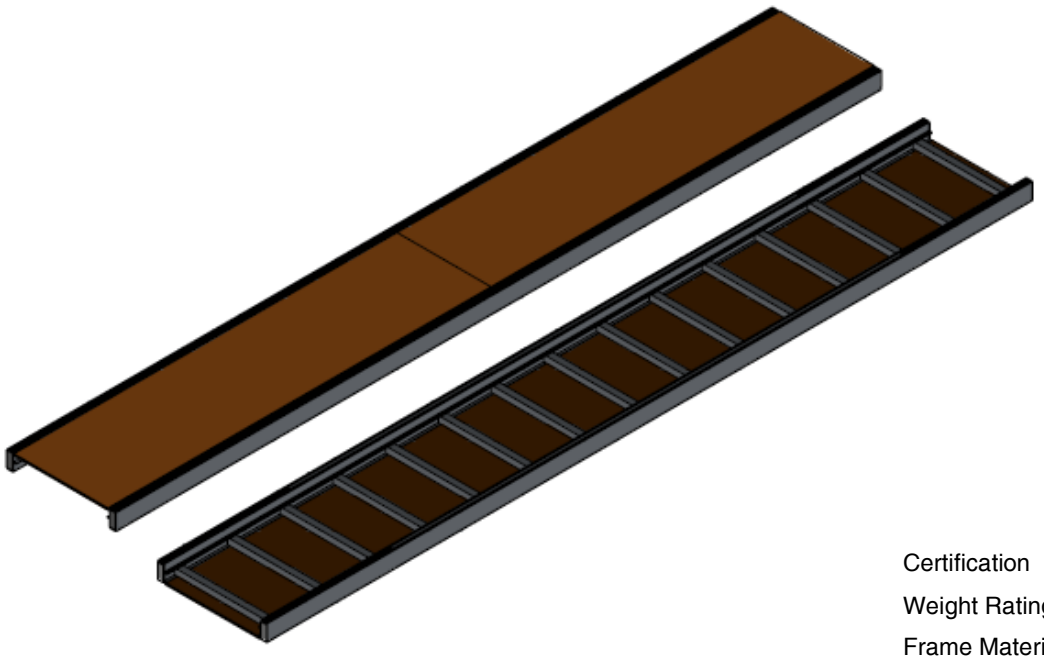

Available Lengths	Stile Depth
2.4m	60mm
3.0m	60mm
3.6m	60mm
4.2m	90mm
4.8m	90mm
5.4m	90mm
5.95m	90mm


Certification	BS8630
Weight Rating	250kg
Frame Material	6082T6 Aluminium
Platform Material	Marine Plywood, Non-slip Finish

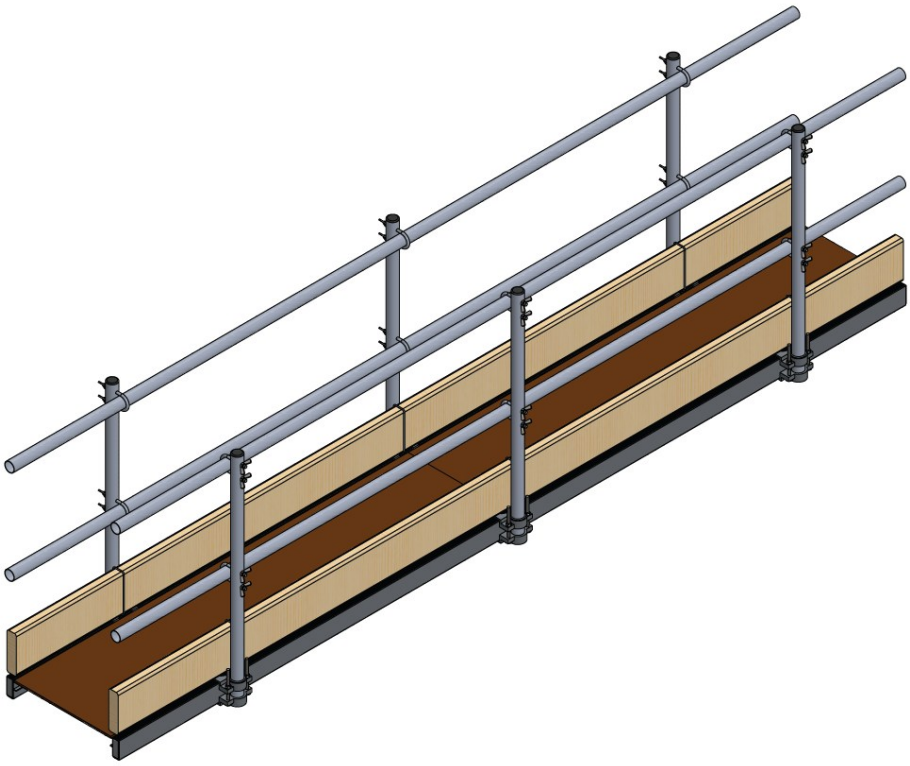


NUMBER OF POST PER SIDE OF STAGING.

Posts should be spaced 0.6m from ends of the staging board.
There should never be a gap of more than 2.5m between posts, and they should be equally spaced.

Length	Posts
2.4m	2
3.0m	2
3.6m	2
4.2m	3
4.8m	3
5.4m	3
5.95m	3



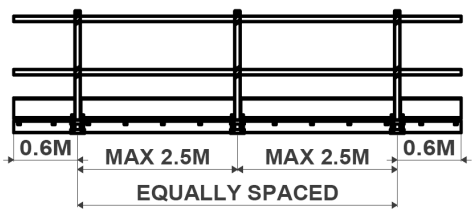

01227 860085
Mon-Fri, 8am until 5pm

For More Information:

info@towersandpodiums.co.uk

We reply within 1 hour

MADE IN BRITAIN

FORS FLEET OPERATOR RECOGNITION SCHEME

T&RGETMARK CERTIFIED
BS 8630:2019
TM1011
testandresearch.org