
# UTS SALES AND REPAIRS

## A SAFER WAY TO REACH NEW HEIGHTS


| Single Width Tower | Working Height | Platform Height |
|---|---|---|
| 1.8m Long x 0.85m Wide | 8.7m | 6.7m |

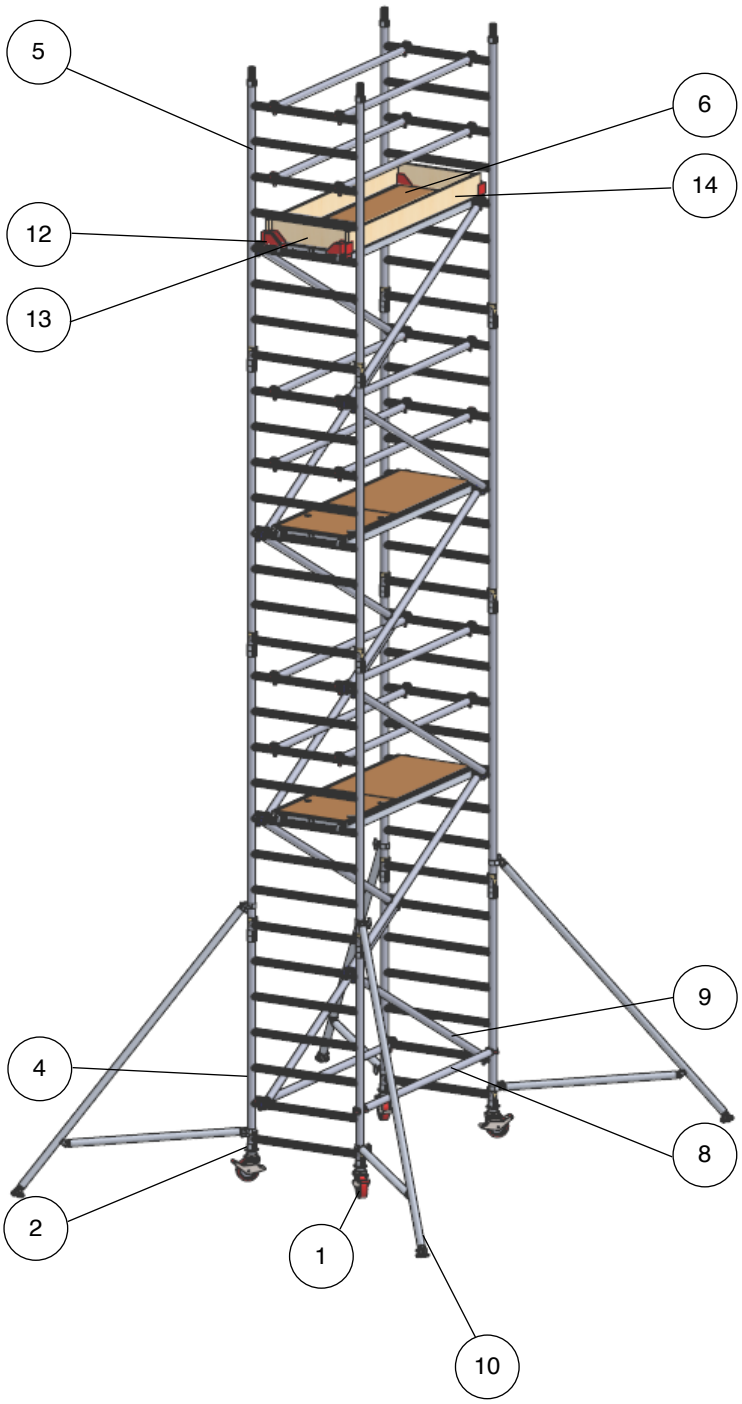


*Folding single piece Aluminum toeboard available as an upgrade

## Tower Components

| Item | Description | Quantity |
|---|---|---|
| 1 | 150mm Locking Caster | 4 |
| 2 | Adjustable Leg 500mm | 4 |
| 3 | 1m 4 Rung Frame | 0 |
| 4 | 1.5m 6 Rung Frame | 2 |
| 5 | 2m 8 Rung Frame | 6 |
| 6 | 1.8m Trapdoor Platform | 4 |
| 7 | 1.8m Fixed Platform | 0 |
| 8 | 1.8m Horizontal Brace | 14 |
| 9 | 2.1m Diagonal Brace | 12 |
| 10 | S1 Stabiliser | 4 |
| 11 | S2 Stabiliser | 0 |
| 12 | Toeboard Clips | 4 |
| 13 | Single End | 2 |
| 14 | 1.8m Side | 2 |

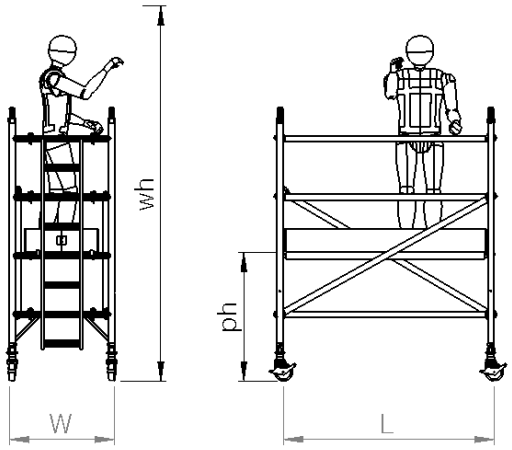


## Technical information:

| | |
|---|---|
| Base Dimensions: | (L)1.8m X (W)0.85m |
| Maximum Platform Height (ph): | 6.7m |
| Maximum Working Height (wh): | 8.7m |
| Maximum Working Load Per Platform: | 275kg |
| Maximum Working Load Per Tower: (including tower weight) | 950kg |
| Weight: | 208.7kg |


01227 860085
Mon-Fri, 8am until 5pm

For More Information:
info@towersandpodiums.co.uk
We reply within 1 hour
Mon-Fri, 8am until 5pm


T&RGETMARK CERTIFIED
BS EN 1004-1:2020
BS EN 1004-2:2021
TM1008
testandresearch.org

MADE IN BRITAIN

FORS FLEET OPERATOR RECOGNITION SCHEME