BROUGHTON PLANT HIRE


HIRE | SALES | SERVICE
Specialists for over 40 years

Hydra Jaws M2000 Pull Tester

Hydrajaws M2000 Medium Duty pull test equipment range enables engineers to confirm the holding power of anchors in most construction materials, either for the purpose of establishing safe working loads or to validate the correct installation of existing fixings.

SPECIFICATIONS

- Pull-Out Load Range: 0–25 kN / lbf
- Tester Weight: 2.2 kg
- Packaged Weight: 8 kg (approx.)
- Effective Stroke: 50 mm
- Stroke Scale: 0–50 mm
- Load Gauge: Digital, 0–25 kN
- Load Gauge Accuracy: ±1.5% FSD
- Load Indication: kN / lbf
- Loading Jaw: Interchangeable aluminium
- Loading Jaw Rotation: 360° pivotable with spring return
- Operating Handle: Standard size with integrated 22 mm operating nut
- Calibration: UKAS traceable calibration certificate supplied
- Working Temperature: -30°C to +35°C (digital gauge)

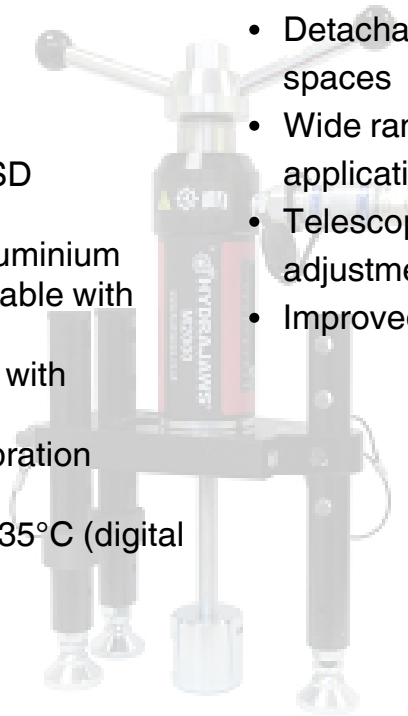

FEATURES

- Turning handle design with integrated operating nut
- Detachable handles for use in confined spaces
- Wide range of adaptors for different testing applications
- Telescopic legs for quick and easy height adjustment
- Improved load-spreading bridge design